



xistence

Loudspeakers


XS-FR 8.5.8fc

no box & no x-over series

8" (200)

“underhung”(

Z nominal impedance (ohms)	8
SPL 2,83v\1m (db)	92,4
Pmax continues rms (w)	25
Pmax thermal (w)	50
Fs resonance (Hz)	48
Vas (liters)	65
Qts	0,77
Qms	8
Qes	0,86
Mms (grams)	11
BL motor strength	4,9
D effective cone dia. (mm)	165
Sd (sq.cm)	214
Voice coil diameter (mm)	25,5
Height of winding (mm)	5
Re DC resistance (ohms)	6,2
Le inductance (mH)	0,44
Magnetic induction (Tl)	0,92
Height of top plate (mm)	11
Xmax Excursion (mm)	+ -4

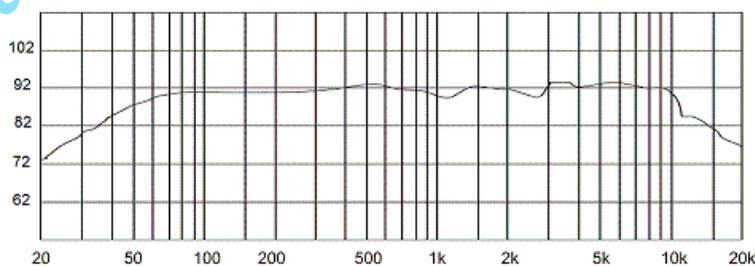

100

2,83 /1

