

DC160S-8

6-1/2" Classic Shielded Woofer





Features

- 6-1/2" polymer laminate non-pressed paper cone
- Fully shielded to allow A/V use
- Rubber surround
- Vented pole piece
- Extended bump plate
- High temperature aluminum voice coil


Parameters

Impedance (Ω)	8
Re (Ω)	6.6
Le (mH) @ 1 kHz	1.54
Fs (Hz)	32.3
Qms	2.91
Qes	0.32
Qts	0.29
Mms (g)	25.38
Cms (mm/N)	0.96
Sd (cm ²)	134.8
Vd (liters)	42.5
BL (Tm)	10.26
VAS (liters)	24.5
XMAX (mm)	3.15
VC Diameter (mm)	35
SPL (dB@1W/1m)	87.0
RMS Power Handling (w)	50
Usable Frequency Range (Hz)	33 - 4000

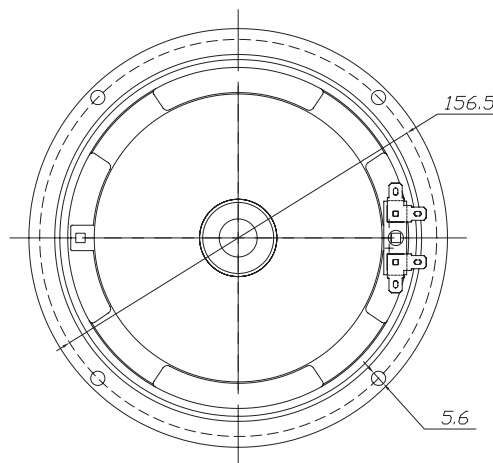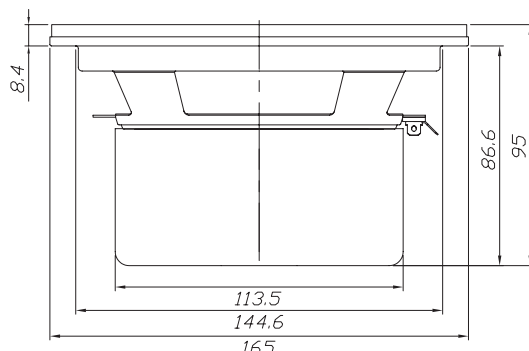

Note: All dimensions in mm.

Frequency Response

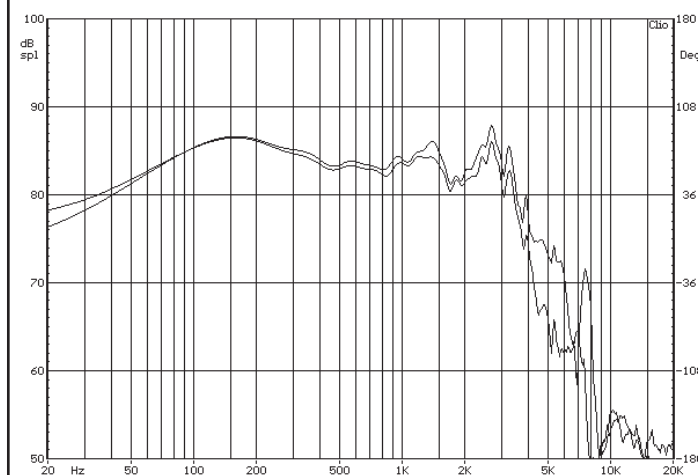

Note: Due to testing limitations, response below 200 Hz is not an actual representation.

Impedance/Phase

