

4-7. SCHEMATIC DIAGRAM - AUDIO SECTION -

A

B

C

D

E


F

G

H

I

J

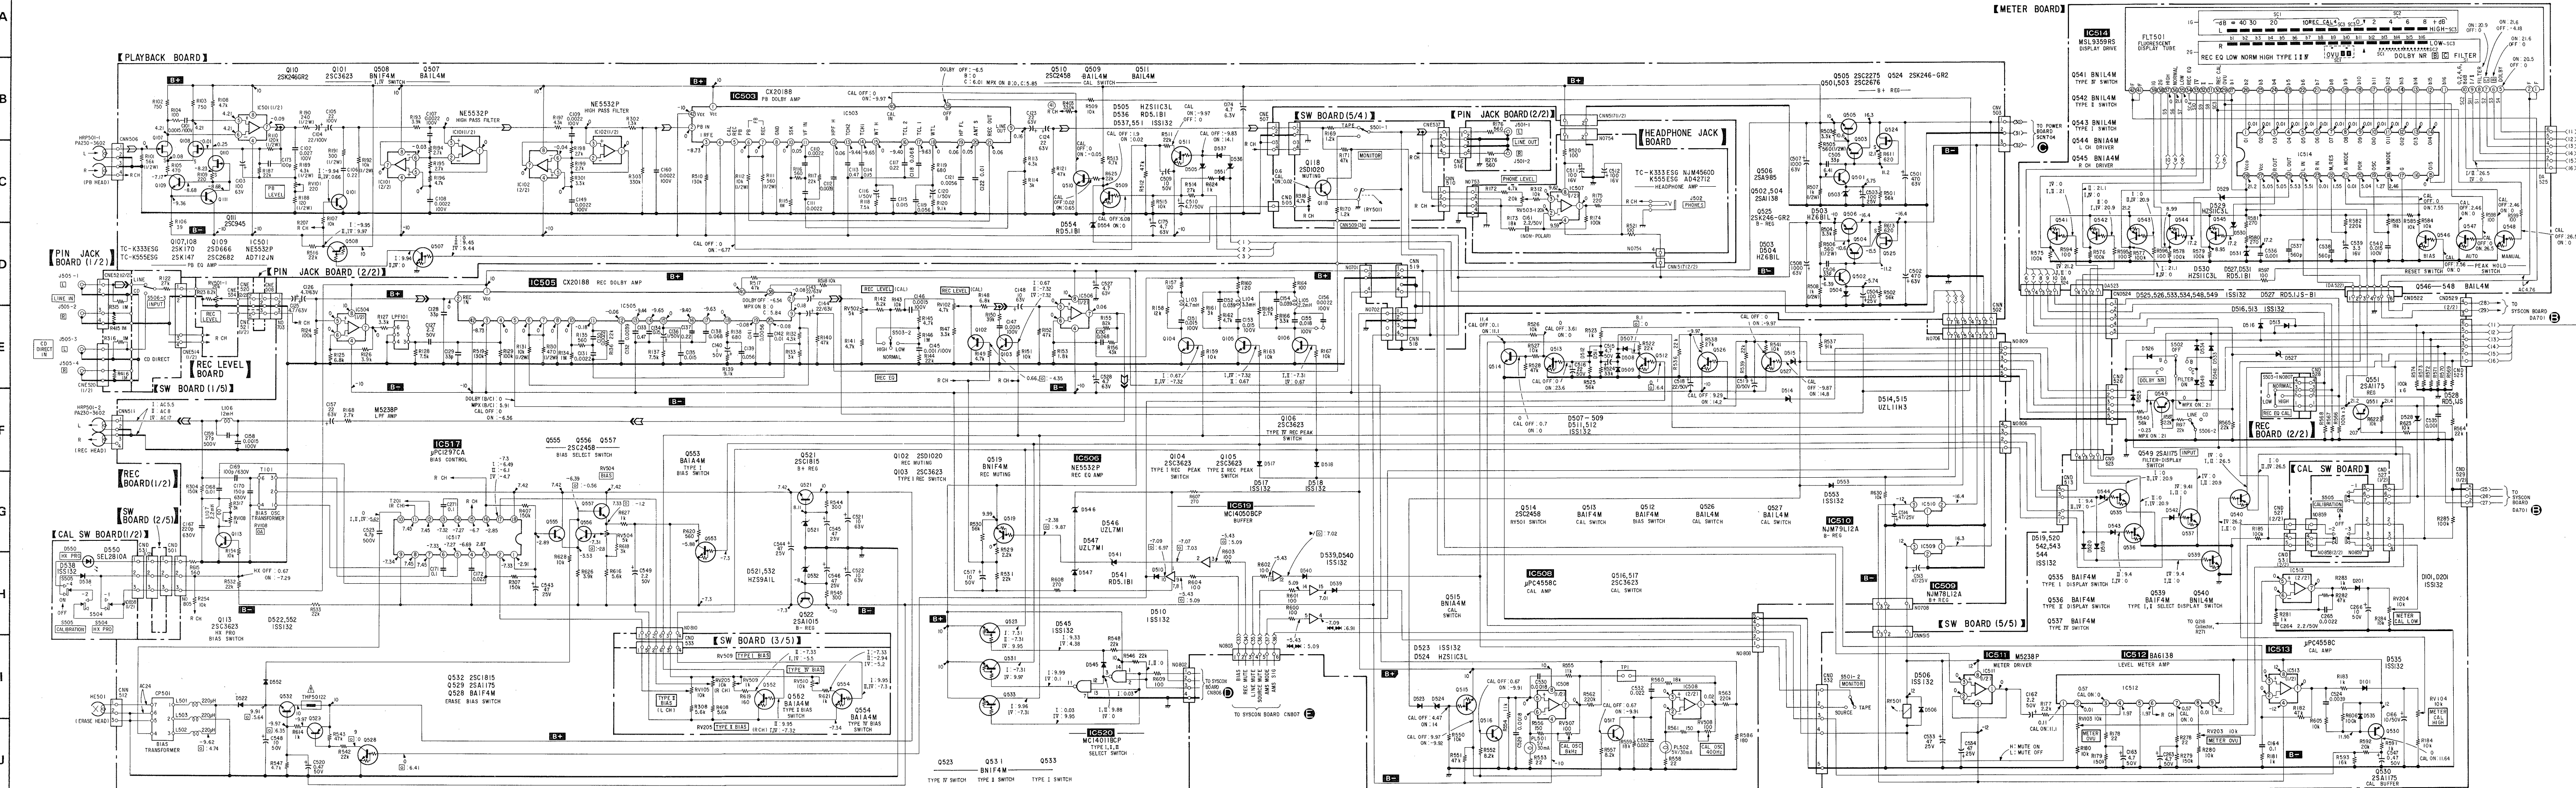

Note on Schematic Diagram:

- All capacitors are in μF unless otherwise noted, pF: μF F 50VW or less are not indicated except for electrolytics and tantalums.
- All resistors are in Ω and $\frac{1}{2}\text{W}$ or less unless otherwise specified.
- Components for right channel have same values as for left channel. Reference numbers are coded from 200, 400.
- Δ : internal component.
- $\square$: nonflammable resistor.
- $\square$: fusible resistor.

Note: The components identified by mark Δ or dotted line with mark Δ are critical for safety. Replace only with part number specified.

Note: Les composants identifiés par une marque Δ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

- B+: B + Line
- B-: B - Line
- $\square$: adjustment for repair
- Voltage and waveforms are dc with respect to ground under no-signal conditions.
- no mark: STOP
- $\square$: PLAY
- $\square$: REC
- $\square$: FF
- $\square$: REW
- $\square$: EJECT
- Voltages are taken with a VOM (Input impedance 10 M Ω)
- Voltage variations may be noted due to normal production tolerances.
- Signal path.
- $\square$: PB
- $\square$: REC