




aiwa



NSX-999

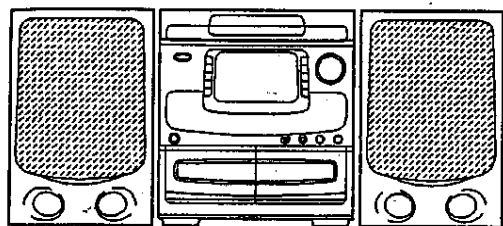

STEREO SYSTEM

- BASIC TAPE MECHANISM: 2ZM-3 PR1N
- BASIC CD MECHANISM: 4ZG-1 DFR

- TYPE. U,HK,HR,EZ,EEZ,K

REVISION PUBLISHING


SYSTEM	CENTER UNIT	SPEAKER
NSX-999	CX-N999	SX-N999

- This Service Manual is the "Revision Publishing" and replaces "Simple Manual" (S/M Code No. 09-954-097-90T).
- If requiring information about the mechanism, see Service Manual of 4ZG1, S/M Code No. 09-946-056-10T.

VOLTAGE VALUE

IC720	(9)	(10)	(13)	(14)
FM	8.0	6.4	8.0	0.1
MW	8.1	0.1	8.1	8.1
SW1	8.1	0.1	0.1	8.1
SW2	0.1	0.1	8.0	8.0

IC770	(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)	(9)	(10)	(11)	(12)	(13)	(14)	(15)	(16)	(17)	(18)	(19)	(20)
FM	3.7	8.0	3.7	3.8	3.7	0	7.4/0	8.0/0	8.0	8.0	0	1.3	1.7	6.6	7.0	3.8	3.8	3.8	3.8	3.9
MW	3.7	8.1	3.7	3.7	3.7	0	7.4/0	8.0/0	8.1	8.0	0	0	1.7	4.2	6.0	3.7	3.7	3.7	3.7	3.8
SW1	3.8	8.1	3.8	3.8	3.8	0	7.4/0	8.0/0	8.1	8.0	0	0	1.7	4.2	6.0	3.8	3.8	3.8	3.8	3.9
SW2	4.2	8.0	4.2	4.2	4.2	0	7.4/0	8.0/0	8.0	8.0	0	0	1.7	4.2	6.0	4.2	4.2	4.2	4.2	4.6

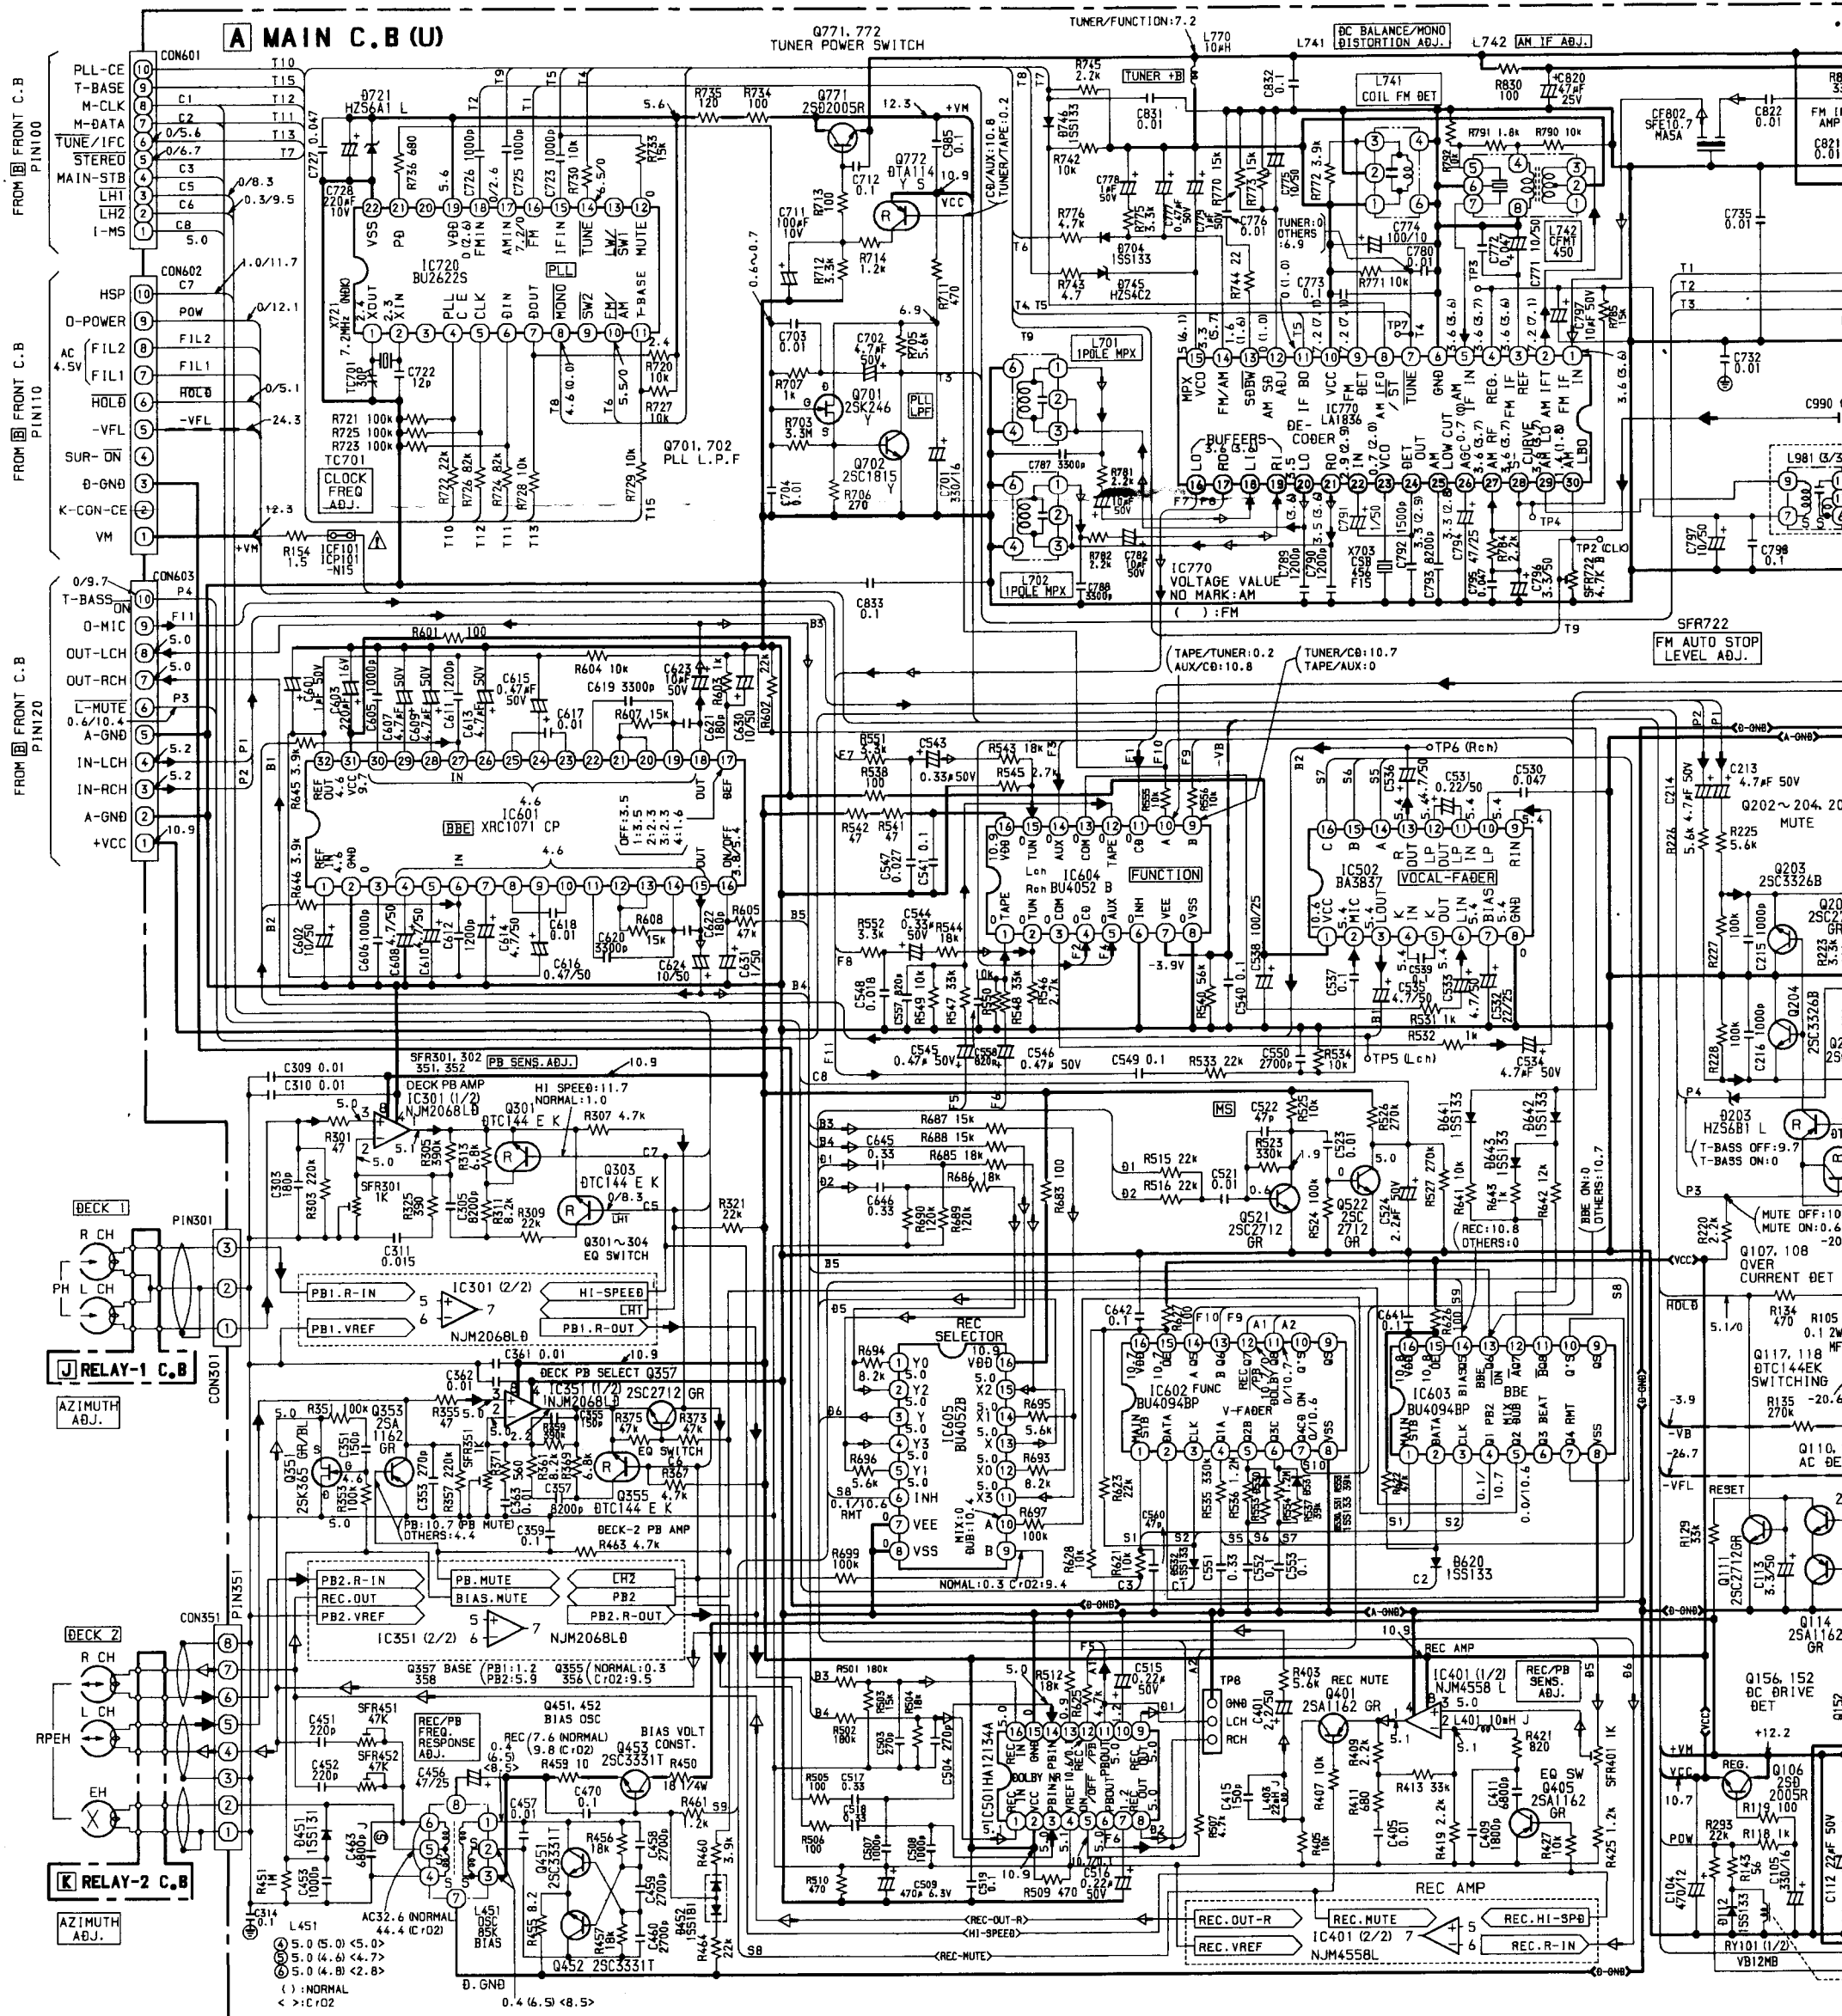


[illegible]

SCHEMATIC DIAGRAM-2 (HK, HR)


VOLTAGE VALUE

IC720	(9)	(10)	(13)	(14)
FM	8.0	6.4	8.0	0.1
MW	8.1	0.1	8.1	8.1
SW1	8.1	0.1	0.1	8.1
SW2	0.1	0.1	8.0	8.0

IC770	(1)	(2)	(3)	(4)	(5)
FM	3.7	8.0	3.7	3.8	3.7
MW	3.7	8.1	3.7	3.7	3.7
SW1	3.8	8.1	3.8	3.8	3.8
SW2	4.2	8.0	4.2	4.2	4.2

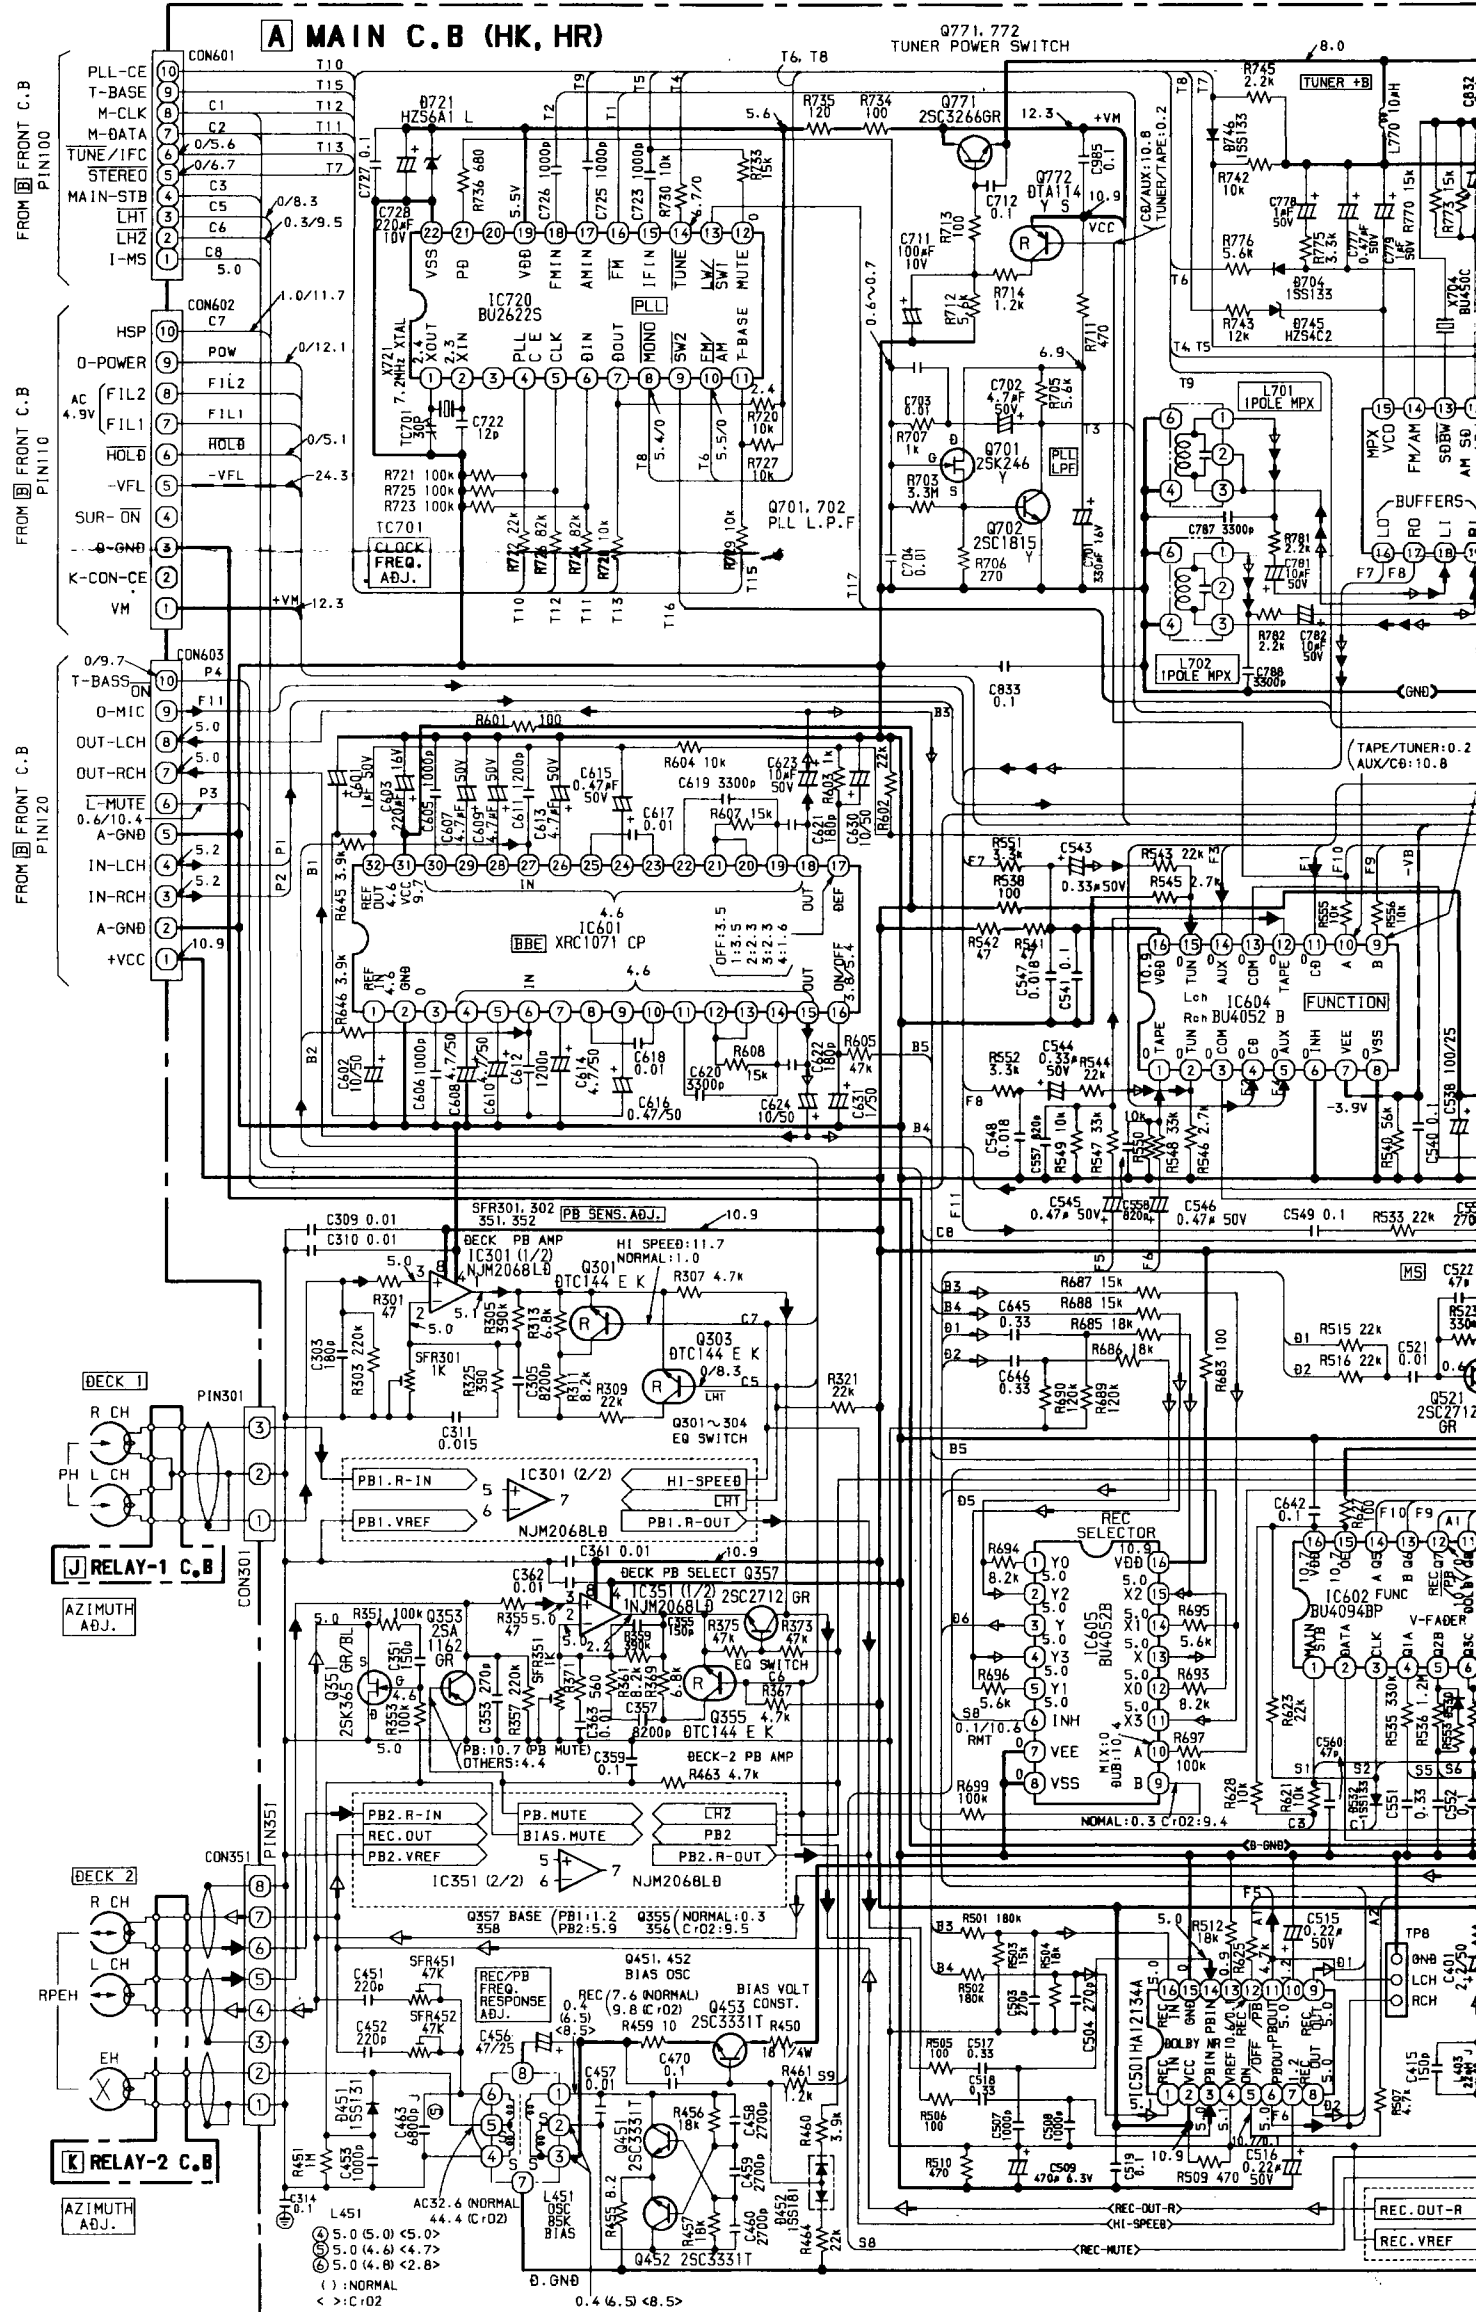

(4)	(5)	(6)	(7)	(8)	(9)	(10)	(11)	(12)	(13)	(14)	(15)	(16)	(17)	(18)	(19)	(20)	(21)	(22)	(23)	(24)	(25)	(26)	(27)	(28)	(29)	(30)	
3.8	3.7	0	7.4/0	8.0/0	8.0	8.0	0	1.3	1.7	6.6	7.0	3.8	3.8	3.8	3.8	3.9	3.9	3.0	2.3	3.2	2.9	0	3.7	3.7	3.8	1.9	
3.7	3.7	0	7.4/0	8.0/0	8.1	8.0	0	0	1.7	4.2	6.0	3.7	3.7	3.7	3.7	3.8	3.8	3.0	1.4	3.3	3.3	0.5	3.7	3.7	3.7	1.5	
3.8	3.8	0	7.4/0	8.0/0	8.1	8.0	0	0	1.7	4.2	6.0	3.8	3.8	3.8	3.8	3.8	3.9	3.9	3.0	1.4	3.3	3.3	0.5	3.7	3.7	3.8	1.5
4.2	4.2	0	7.4/0	8.0/0	8.0	8.0	0	0	1.7	4.2	6.0	4.2	4.2	4.2	4.2	4.2	4.6	4.6	3.5	1.3	3.5	3.5	0.5	4.2	4.2	4.3	2.0

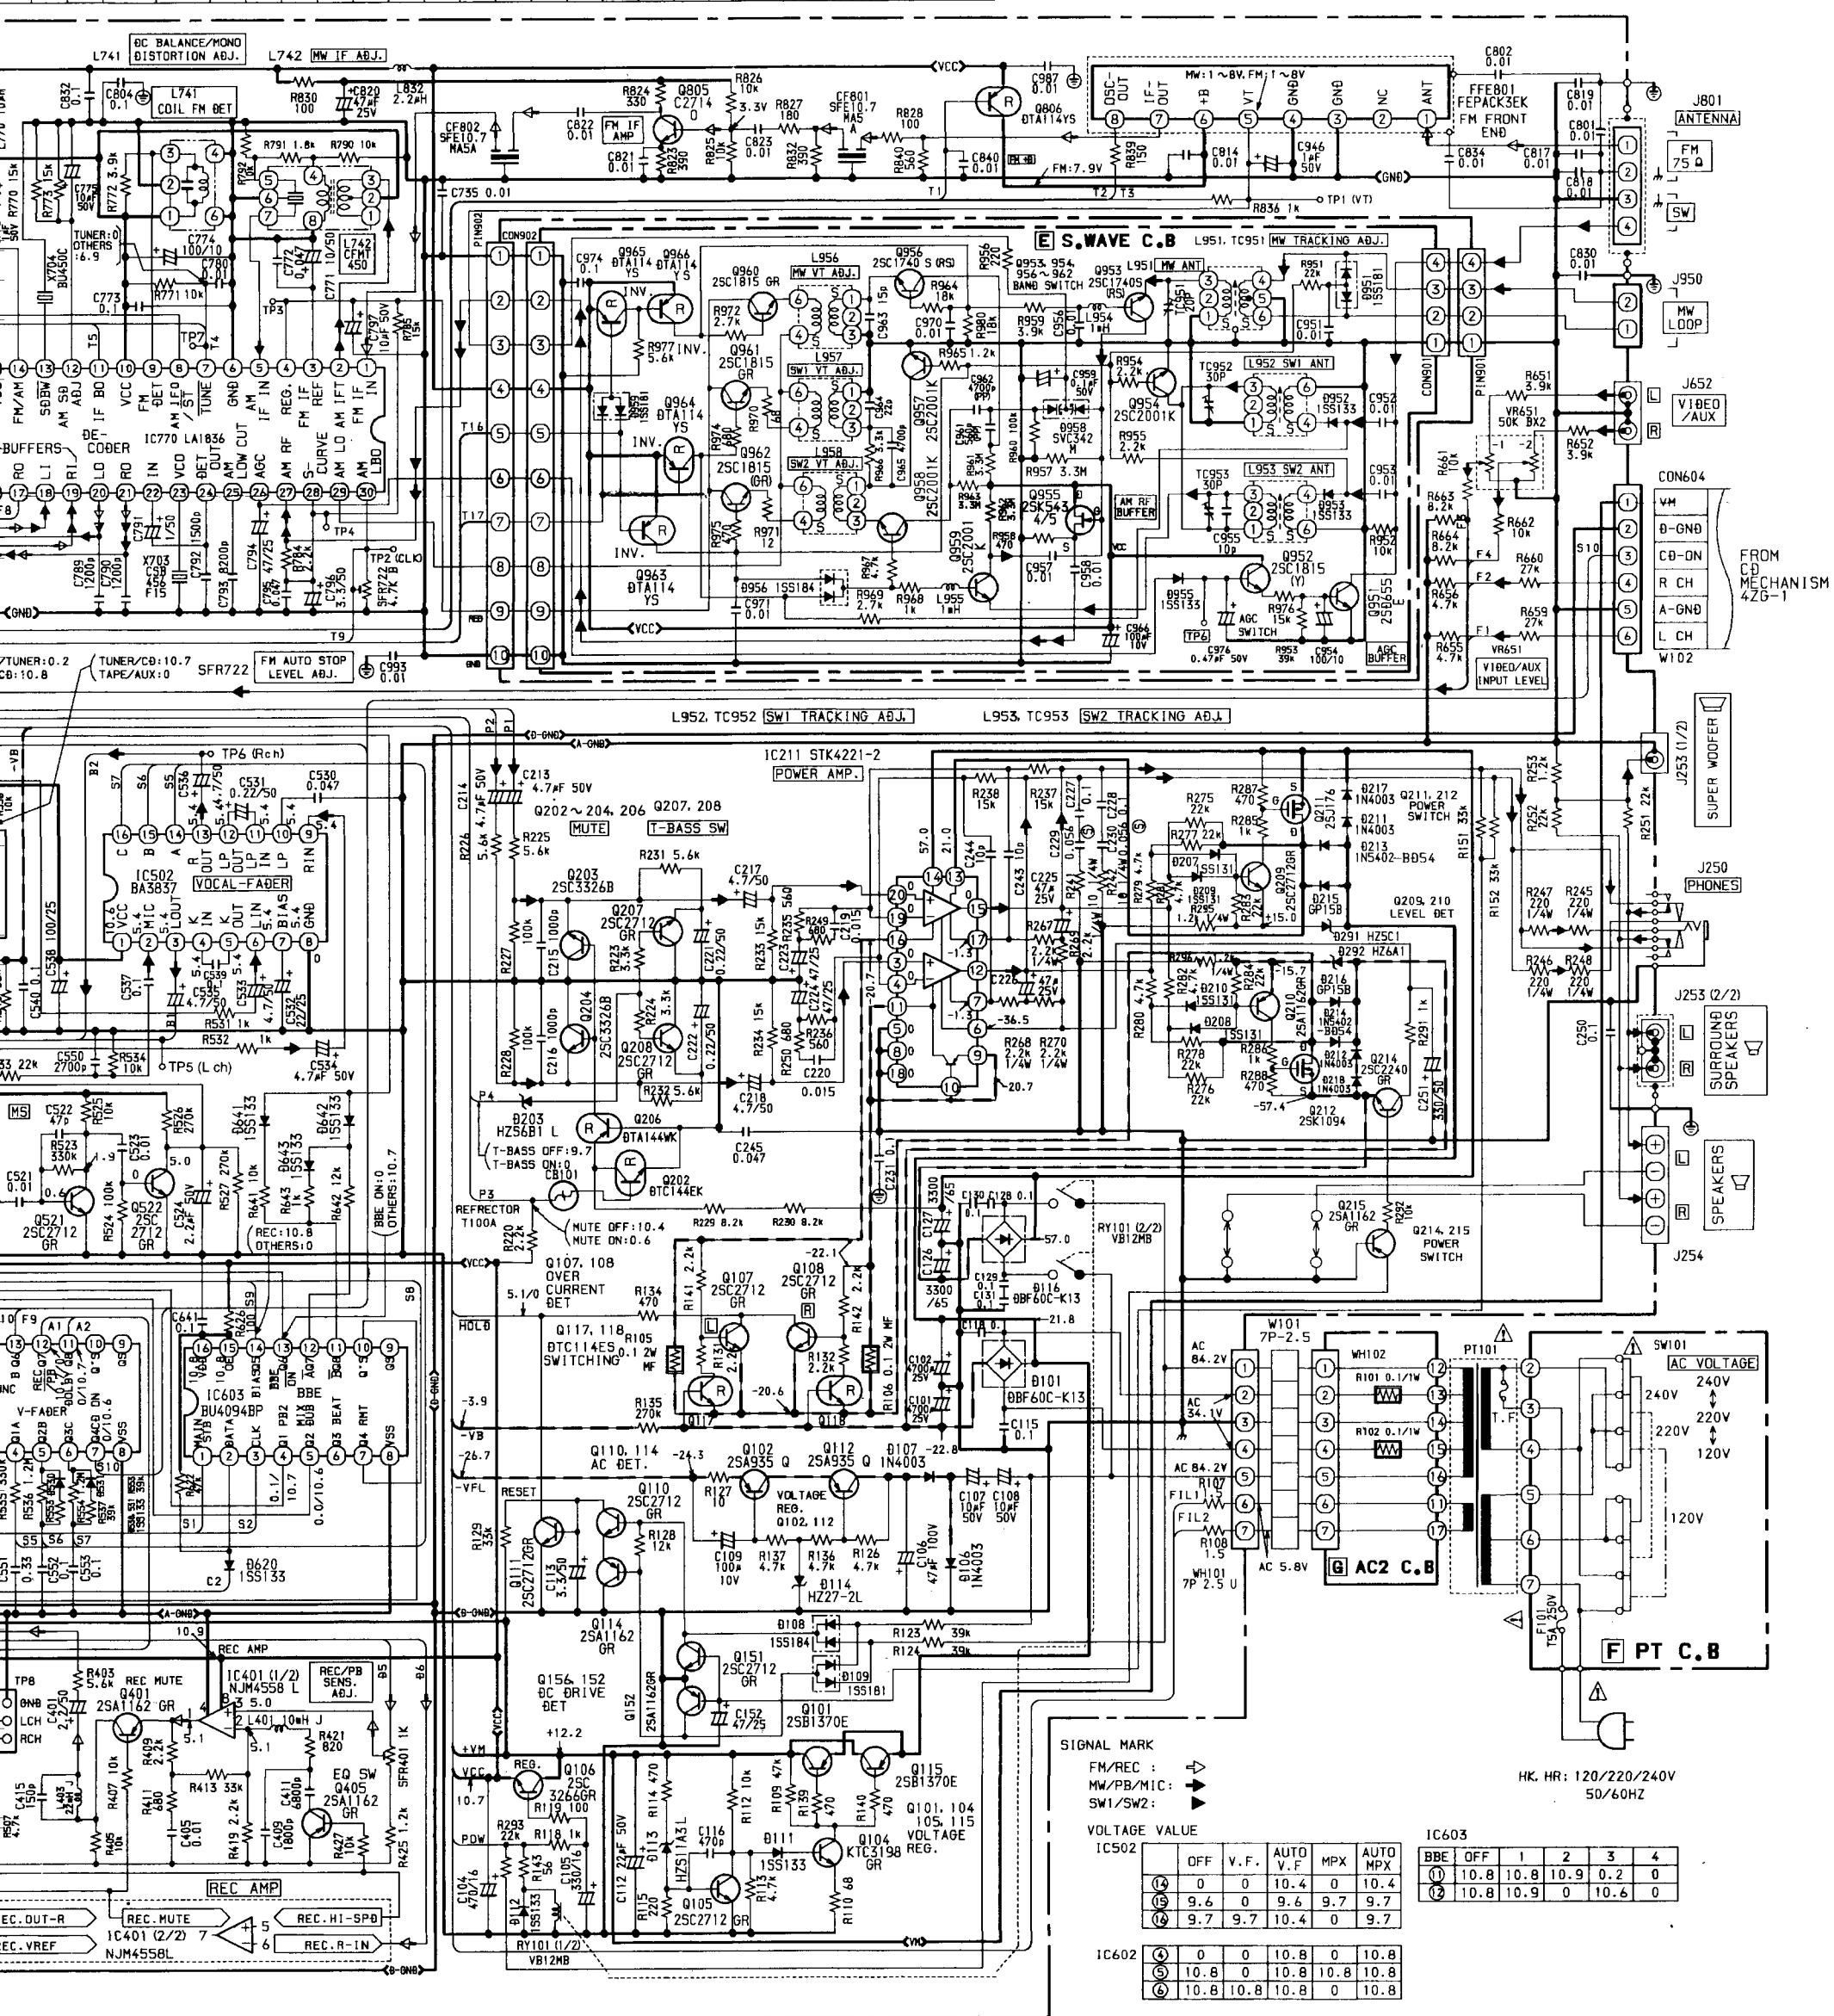


SCHEMATIC DIAGRAM-3 (EZ, EEZ, K)

VOLTAGE VALUE

IC720	(1)	(3)	(4)
FM	6.3	7.2	0.1
MW	0.1	0.1	7.2
LW	0.1	7.2	7.2

IC770

	(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)	(9)	(10)	(11)	(12)	(13)	(14)	(15)	(16)	(17)	(18)	(19)	(20)	(21)
FM	3.6	7.2	3.6	3.6	3.6	0	6.8/0	7.2/0	7.2	7.2	0	1.6	1.6	5.8	6.2	3.6	3.6	3.6	3.6	3.5	3.5
MW, LW	3.5	7.2	3.5	3.6	3.5	0	6.8/0	7.2/0			0	0	1.6	3.4	5.1	3.6	3.6	3.6	3.6	3.4	3.4

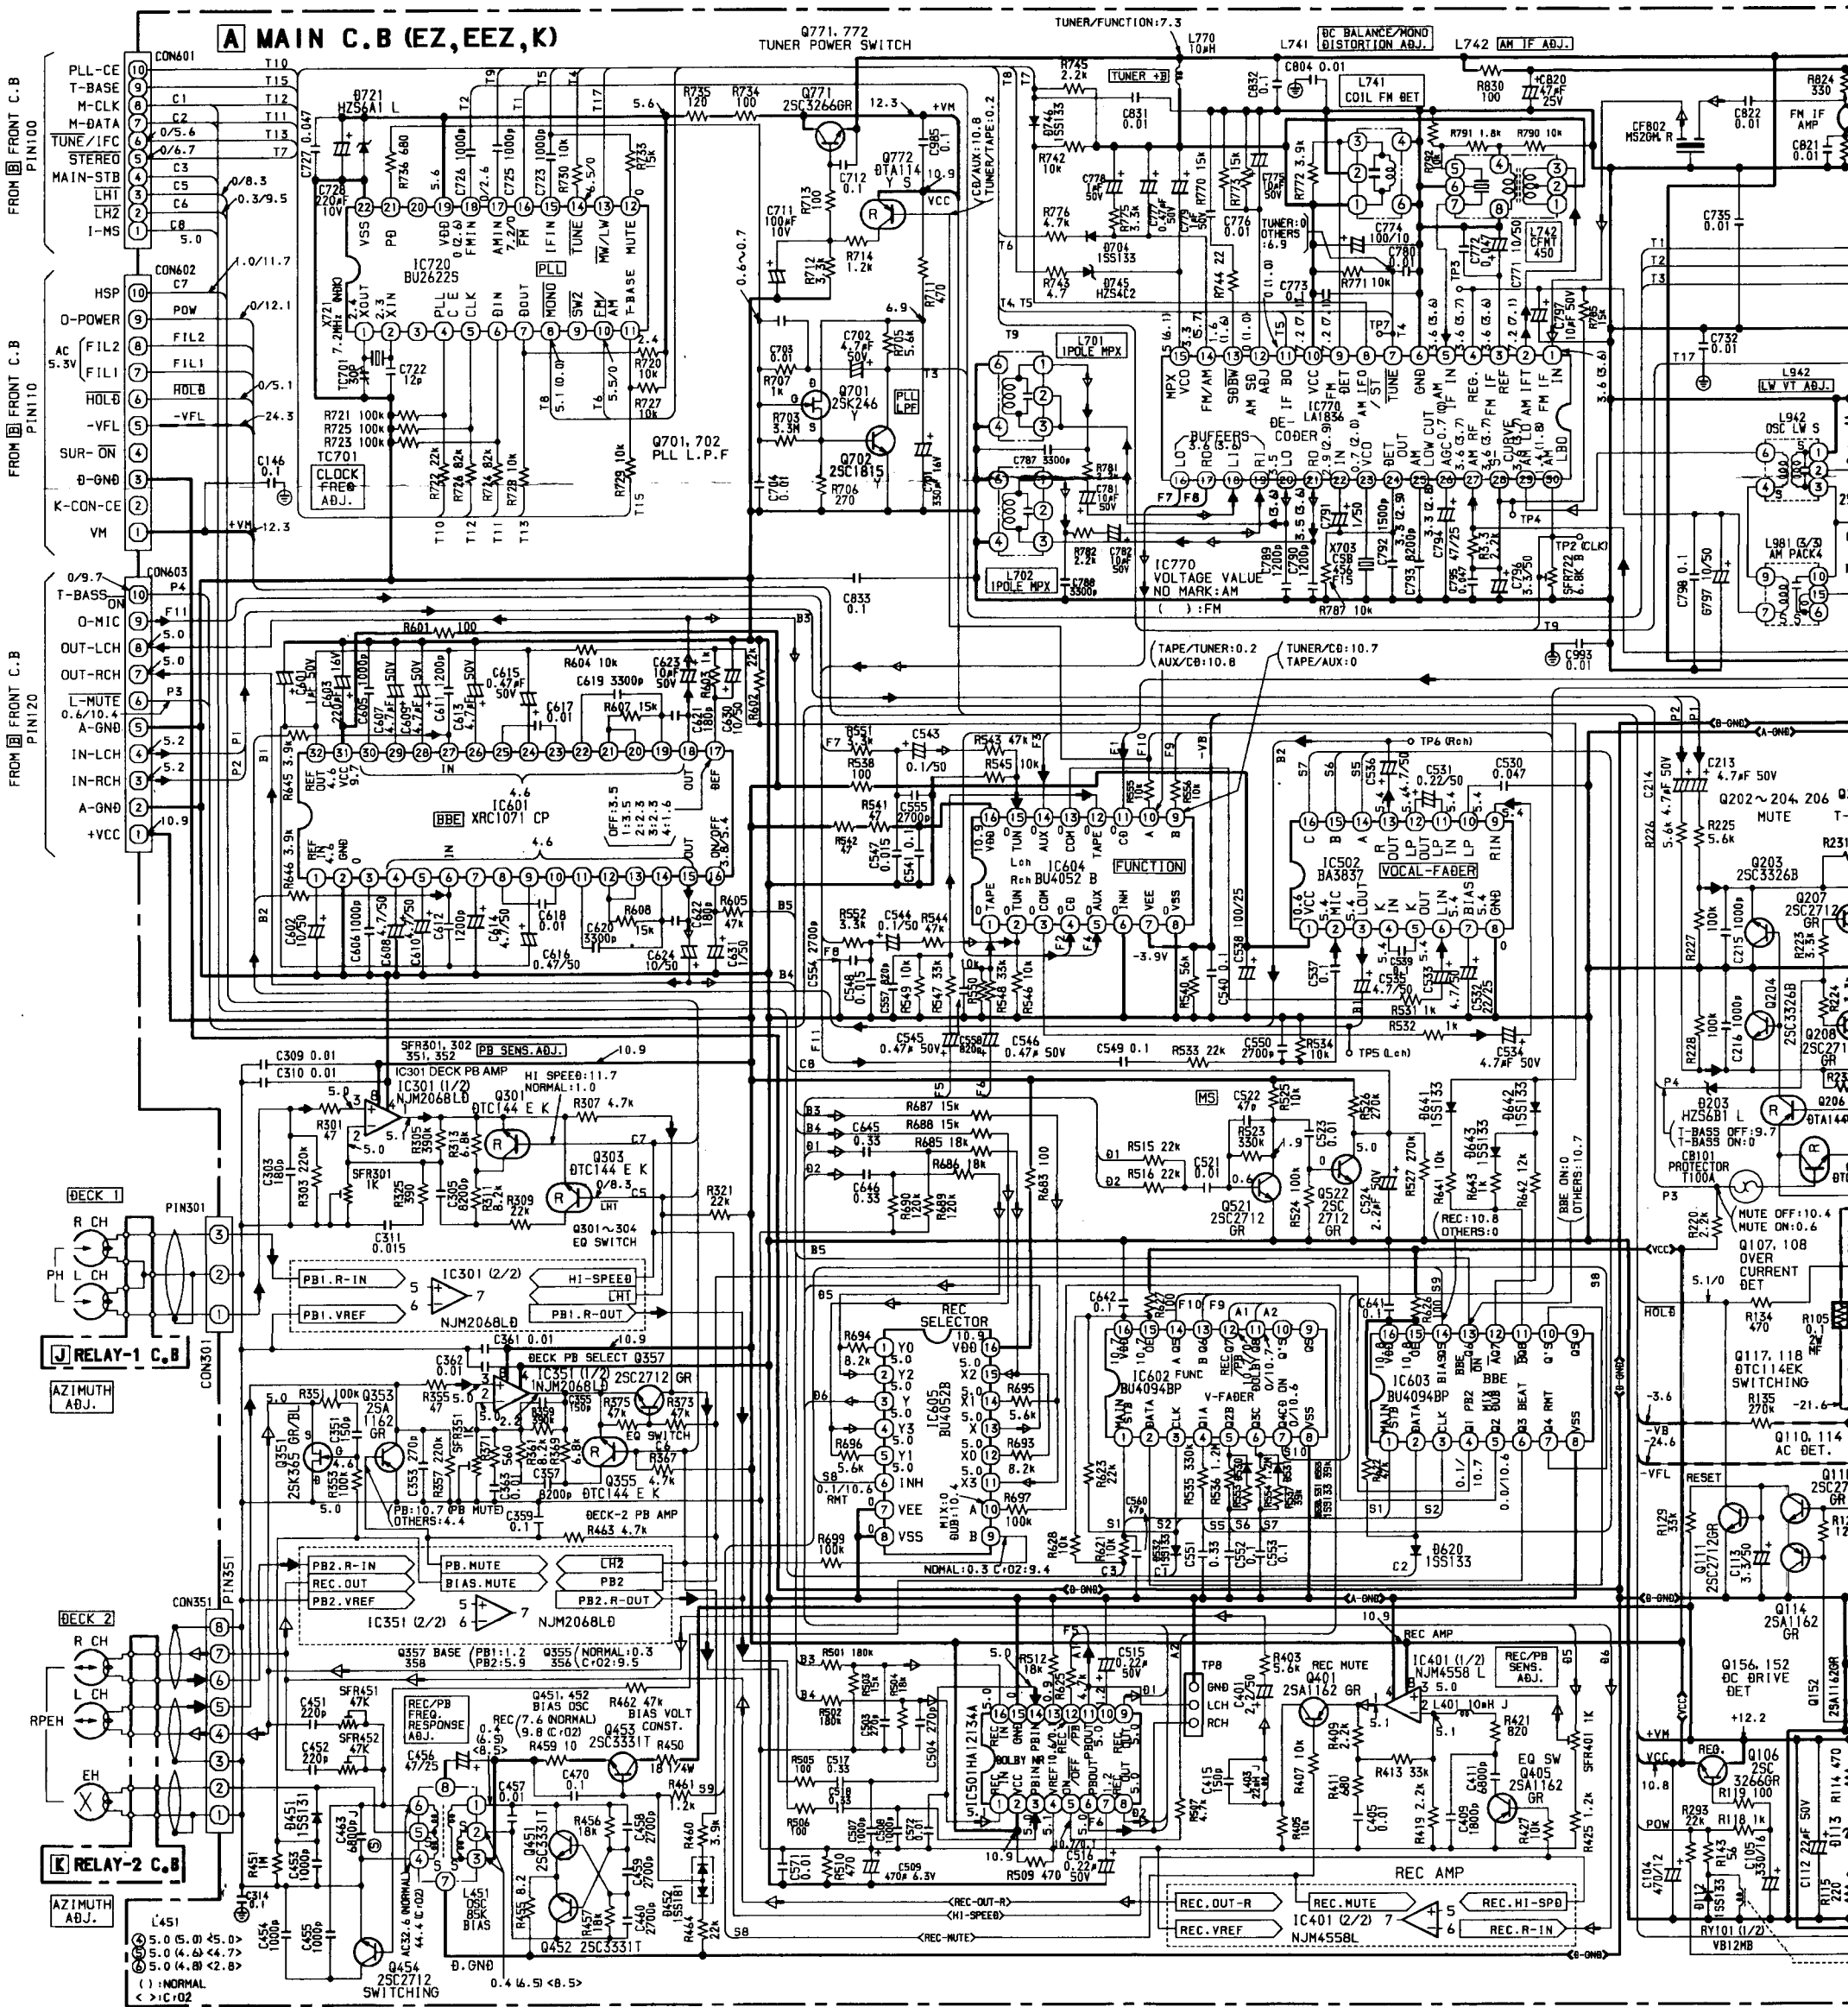

	(19)	(20)	(21)	(22)	(23)	(24)	(25)	(26)	(27)	(28)	(29)	(30)
6	3.6	3.5	3.5	2.8	2.1	2.5	2.7	0	3.6	3.6	3.6	1.6
6	3.6	3.4	3.4	2.8	0.6	1.0	3.1	0.5	3.5	3.5	3.6	1.3

