


TA-EX50/EX90

SERVICE MANUAL

AEP Model
UK Model
TA-EX50/EX90
E Model
TA-EX50

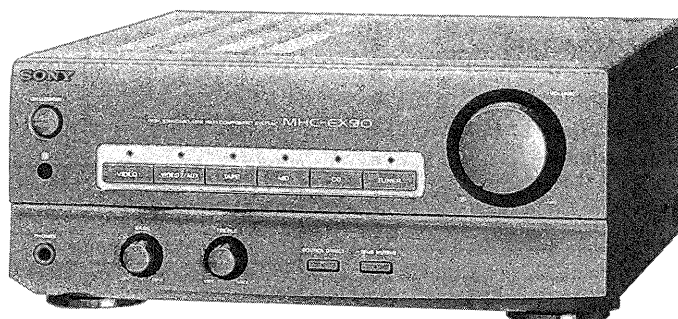

TA-EX50/EX90 is the amplifier section
in MHC-EX50, MHC-EX90.

Photo : TA-EX90

SPECIFICATIONS

DIN power output 45 W + 45 W (6 ohms,
at 1 kHz, DIN)
(EX50: AEP, UK, G, IT,
CIS models)
50 W + 50 W (6 ohms,
at 1 kHz, DIN) (EX90)

Continuous RMS power output
55 W + 55 W (6 ohms,
at 1 kHz, 10% THD)
(EX50: AEP, UK, G, IT,
CIS models)
50 W + 50 W (6 ohms,
at 1 kHz, 5% THD)
(EX50: EXCEPT AEP,
UK, G, IT, CIS models)
65 W + 65 W (6 ohms,
at 1 kHz, 10% THD)
(EX90)

Music power output
95 W + 95 W (6 ohms,
at 1 kHz, 10% THD)
(EX50: AEP, UK, G, IT,
CIS models)
120 W + 120 W (6 ohms,
at 1 kHz, 10% THD)
(EX90)

Input	Jack type	Sensitivity	Impedance
CD	Phono	450 mV	47 kilohms
MD	Phono	450 mV	47 kilohms
TUNER	Phono	250 mV	47 kilohms
VIDEO1	Phono	250 mV	47 kilohms
VIDEO2/ AUX	Phono	250 mV	47 kilohms
TAPE	Phono	250 mV	47 kilohms

Output	Jack type	Voltage	Impedance
MD	Phono	250 mV	1 kilohm
VIDEO1	Phono	250 mV	1 kilohm
TAPE	Phono	250 mV	1 kilohm
PHONES	Stereo phone	—	Accepts headphones of 8 ohms or more

Dimensions

Approx. 280 x 122.5 x 290 mm
(11 1/8 x 4 7/8 x 11 1/2 in) (w/h/d)
incl. projecting parts and controls

Mass Approx. 5.3 kg
(11 lb 10 oz)

General

Power requirements

220 – 230 V AC,
50/60 Hz (EX50: AEP,
UK, G, IT, CIS, EX90
models)
220 V AC, 50/60 Hz
(EX50: TH)
110 – 120 V or
220 – 240 V AC,
50/60 Hz
Adjustable with the
voltage selector
(EX50: EXCEPT AEP, UK,
G, IT, CIS, TH models)

Power consumption

135 W (system)
(EX50: AEP, UK, G, IT,
CIS models)
145 W (system)
(EX50: EXCEPT AEP,
UK, G, IT, CIS models)
155 W (active speaker
not included) (EX90)

Design and specifications are subject to
change without notice.

• Abbreviation

G : German model.
IT : Italian model.
TH : Thailand model.


INTEGRATED STEREO AMPLIFIER
SONY®

TABLE OF CONTENTS

<u>Section</u>	<u>Title</u>	<u>Page</u>
SECTION 1. GENERAL		3
SECTION 2. DIAGRAMS		
2-1. Circuit Boards Location		4
2-2. IC Pin Function		
• IC101 System Control (M37471M2-461SP)		5
2-3. Printed Wiring Board — Main Section —		6
2-4. Schematic Diagram — Main Section —		9
2-5. Schematic Diagram — Panel Section —		14
2-6. Printed Wiring Board — Panel Section —		16
SECTION 3. EXPLODED VIEWS		
3-1. Front Panel and Case Section		19
3-2. Chassis Section		20
SECTION 4. ELECTRICAL PARTS LIST		21

MODEL IDENTIFICATION

— BACK PANEL —

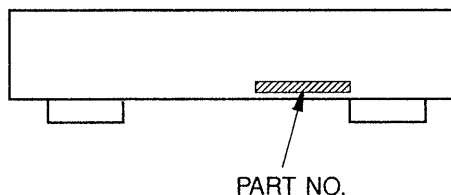

MODEL	PARTS No.
EX50 : E model	4-978-966-0□
Malaysia model	
Singapore model	
Hong Kong model	4-978-966-1□
Saudi Arabia model	4-978-966-3□
Thailand model	4-978-966-4□
AEP model	4-978-969-0□
German model	4-978-969-1□
Italian model	4-978-969-2□
UK model	4-978-969-3□
CIS model	4-978-969-5□
EX90 : AEP model	4-978-974-0□
Italian model	4-978-974-2□
UK model	4-978-974-3□


SAFETY-RELATED COMPONENT WARNING !!

COMPONENTS IDENTIFIED BY MARK $\triangle$ OR DOTTED LINE WITH MARK $\triangle$ ON THE SCHEMATIC DIAGRAMS AND IN THE PARTS LIST ARE CRITICAL TO SAFE OPERATION. REPLACE THESE COMPONENTS WITH SONY PARTS WHOSE PART NUMBERS APPEAR AS SHOWN IN THIS MANUAL OR IN SUPPLEMENTS PUBLISHED BY SONY.

SECTION 1 GENERAL

This section is extracted from instruction manual.

Identifying the Parts

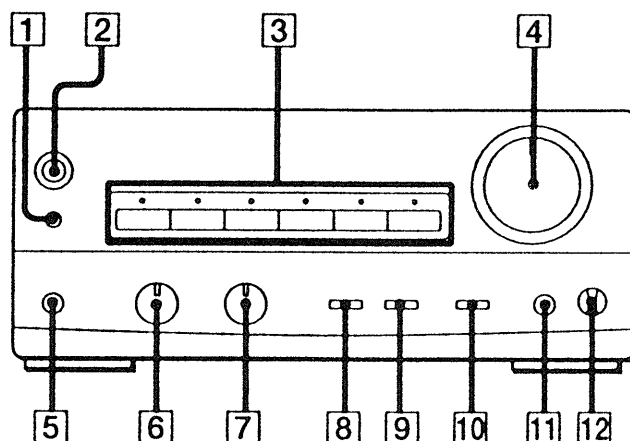


- 1 Remote sensor
- 2 SYSTEM POWER switch and ON/STANDBY indicator (7)
The indicator remains lit as long as the AC power cord is connected to a wall outlet.
- 3 Function buttons* (17, 21, 22)
VIDEO 1 (22)
VIDEO 2/AUX (22)
TAPE
MD
CD (13, 17, 21)
TUNER (17)
- 4 VOLUME control (5, 7, 18, 19)
- 5 PHONES jack (18, 22)
- 6 BASS control (18)
- 7 TREBLE control (18)
- 8 SOURCE DIRECT button* (18)
- 9 MUTING button* (18)
- 10 KARAOKE PON button* (21)
(EX50: E, EA, HK, SP, MY, TH models)
- 11 MIX MIC jack (phone jack) (21, 22)
(EX50: E, EA, HK, SP, MY, TH models)
- 12 MIC LEVEL control (21)
(EX50: E, EA, HK, SP, MY, TH models)

- Abbreviation
EA : Saudi Arabia model.
HK : Hong Kong model.
SP : Singapore model.
MY : Malaysia model.
TH : Thailand model.

SECTION 2

DIAGRAMS

2-1. CIRCUIT BOARDS LOCATION

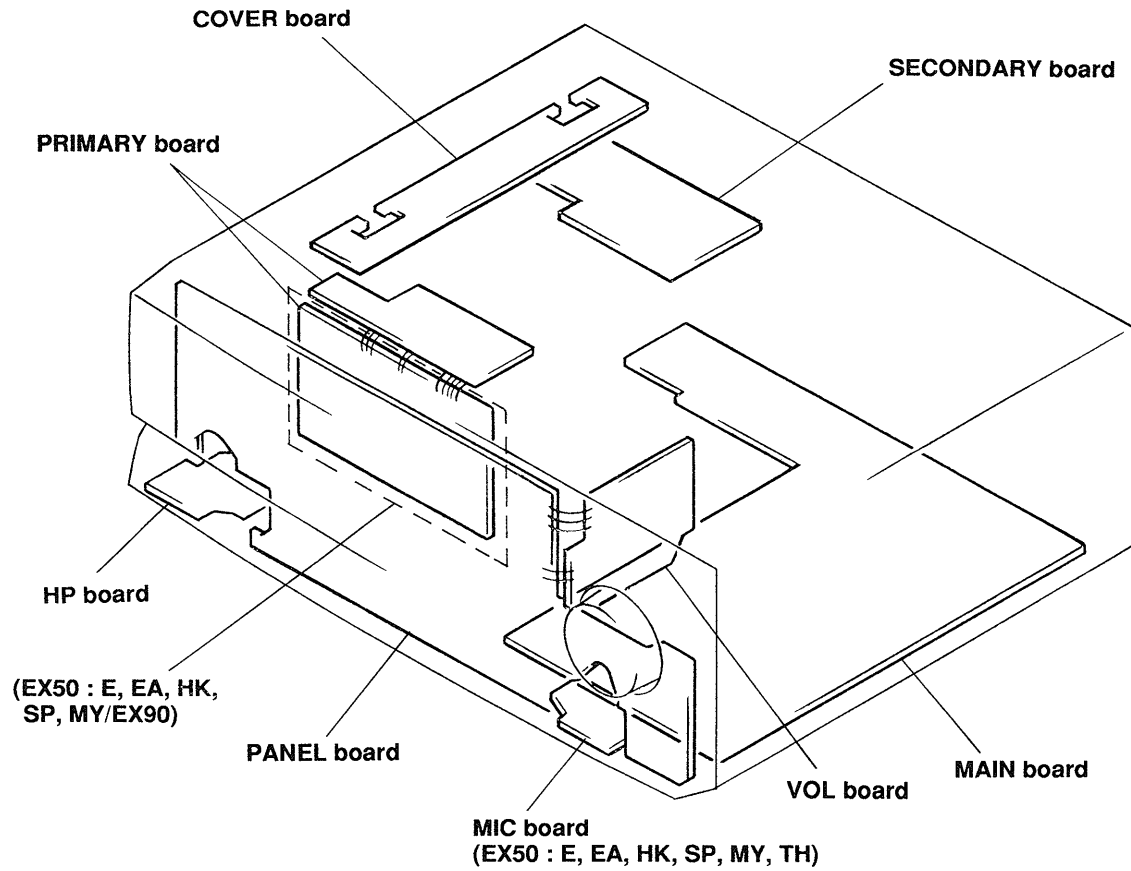

- Abbreviation
 - EA : Saudi Arabia model.
 - HK : Hong Kong model.
 - SP : Singapore model.
 - MY : Malaysia model.
 - TH : Thailand model.

2-2. IC PIN FUNCTION

• IC101 SYSTEM CONTROL (M37471M2-461SP)

Pin No.	Pin Name	I/O	Function
1	—	—	} Not used. (Ground)
2	—	—	
3	—	—	
4	—	—	
5	POWER RELAY	O	Power relay control output.
6	LINE MUTE 2	O	Pre amp mute output.
7	LINE MUTE 1	O	Line mute output.
8	VOL UP	O	Volume up control output.
9	VOL DOWN	O	Volume down control output.
10	K-PON	O	KARAOKE PON control output.
11	—	—	} Not used. (Ground)
12	—	—	
13	—	—	
14	—	—	
15	MIC IN	I	Microphone detect input. (not used: +5V)
16	KEY 1	I	} Key input. (analog)
17	KEY 0	I	
18	VREF	—	Reference voltage input (+5V).
19	XIN	I	System clock input (8 MHz).
20	XOUT	O	System clock output (8 MHz).
21	Vss	—	Ground
22	Vcc	—	Power supply (+5V).
23	MODEL	I	Destination identification input.
24	—	—	Not used. (Ground)
25	RESET	I	Reset signal input.
26	—	—	Not used. (Ground)
27	AU BUS IN	I	Audio bus signal input.
28	SIRCS IN	I	SIRCS signal input.
29	—	—	Not used. (Ground)
30	AU BUS OUT	O	Audio bus signal output.
31	AFUNC 0	O	} Function control output.
32	AFUNC 1	O	
33	AFUNC 2	O	
34	VIDEO 1	O	} Function LED control output.
35	VIDEO 2	O	
36	TAPE	O	
37	MD	O	
38	CD	O	
39	TUNER	O	
40	−20 dB MUTE	O	−20 dB muting control output.
41	SOURCE DIRECT	O	SOURCE DIRECT control output.
42	—	—	Not used. (Ground)


2-3. PRINTED WIRING BOARD — MAIN SECTION —
• See page 4 for Circuit Boards Location.


• Semiconductor Location

Ref. No.	Location
D301	G-9
D302	G-8
D351	G-6
D352	G-6
D702	F-5
D801	H-9
D803	I-6
D804	I-7
D808	I-8
D809	H-10
D813	I-6
D818	I-8
D819	H-10
D1001	F-5
D1002	F-10
D1051	F-5
IC301	F-7
IC501	H-3
IC502	I-3
IC503	H-4
IC504	I-4
IC601	I-5
IC701	F-11
IC802	H-9
IC1001	F-6
Q301	G-8
Q302	F-9
Q303	F-9
Q351	G-6
Q801	H-9
Q809	H-10
Q819	H-10
Q1001	F-6
Q1002	G-6
Q1003	F-10

Note:

-  : Pattern from the side which enable seeing.
- Abbreviation
 - G : German model.
 - IT : Italian model.
 - EA : Saudi Arabia model.
 - HK : Hong Kong model.
 - SP : Singapore model.
 - MY : Malaysia model.
 - TH : Thailand model.

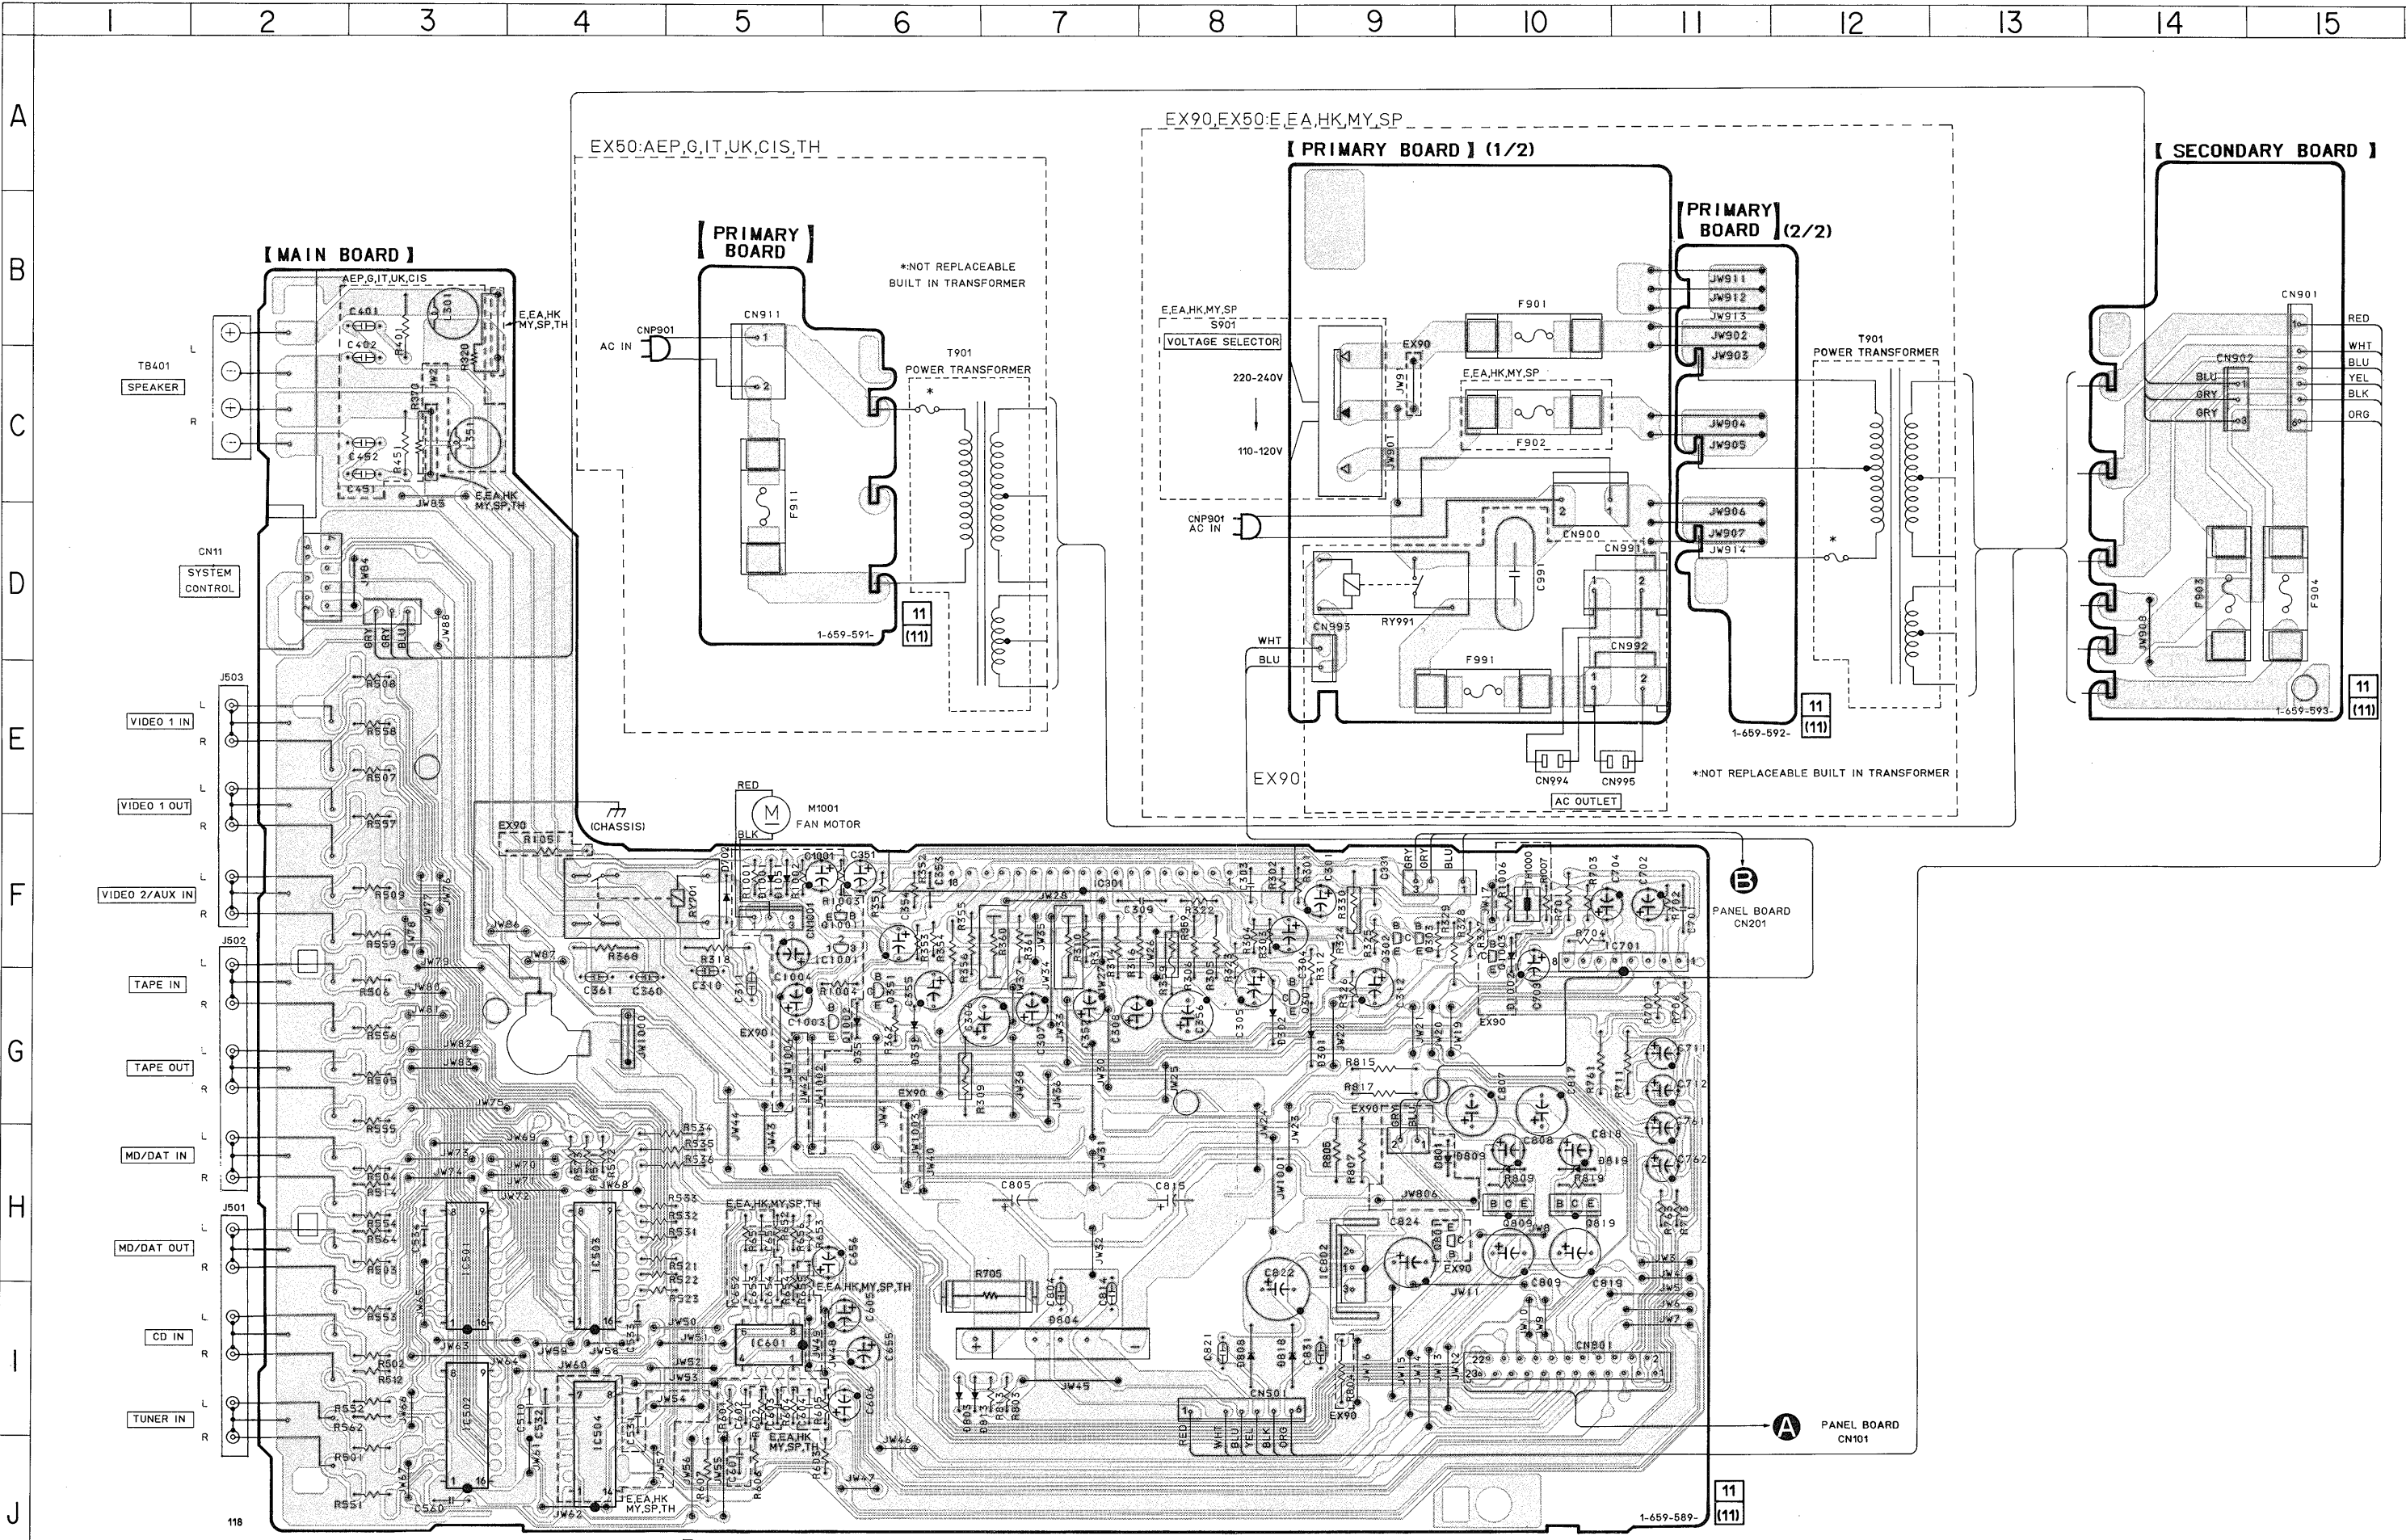



SECTION 3

EXPLODED VIEWS

NOTE:


- -XX, -X mean standardized parts, so they may have some difference from the original one.
- Items marked " * " are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- Color Indication of Appearance Parts Example:
KNOB, BALANCE (WHITE) ... (RED)

↑
Parts color
↑
Cabinet's color
- The mechanical parts with no reference number in the exploded views are not supplied.

- Hardware (# mark) list and accessories and packing materials are given in the last of this parts list.
- Abbreviation
 G : German model
 IT : Italian model
 EA : Saudi Arabia model
 HK : Hong Kong model
 SP : Singapore model
 MY : Malaysia model
 TH : Thai model


The components identified by mark or dotted line with mark are critical for safety. Replace only with part number specified.

3-1. FRONT PANEL AND CASE SECTION

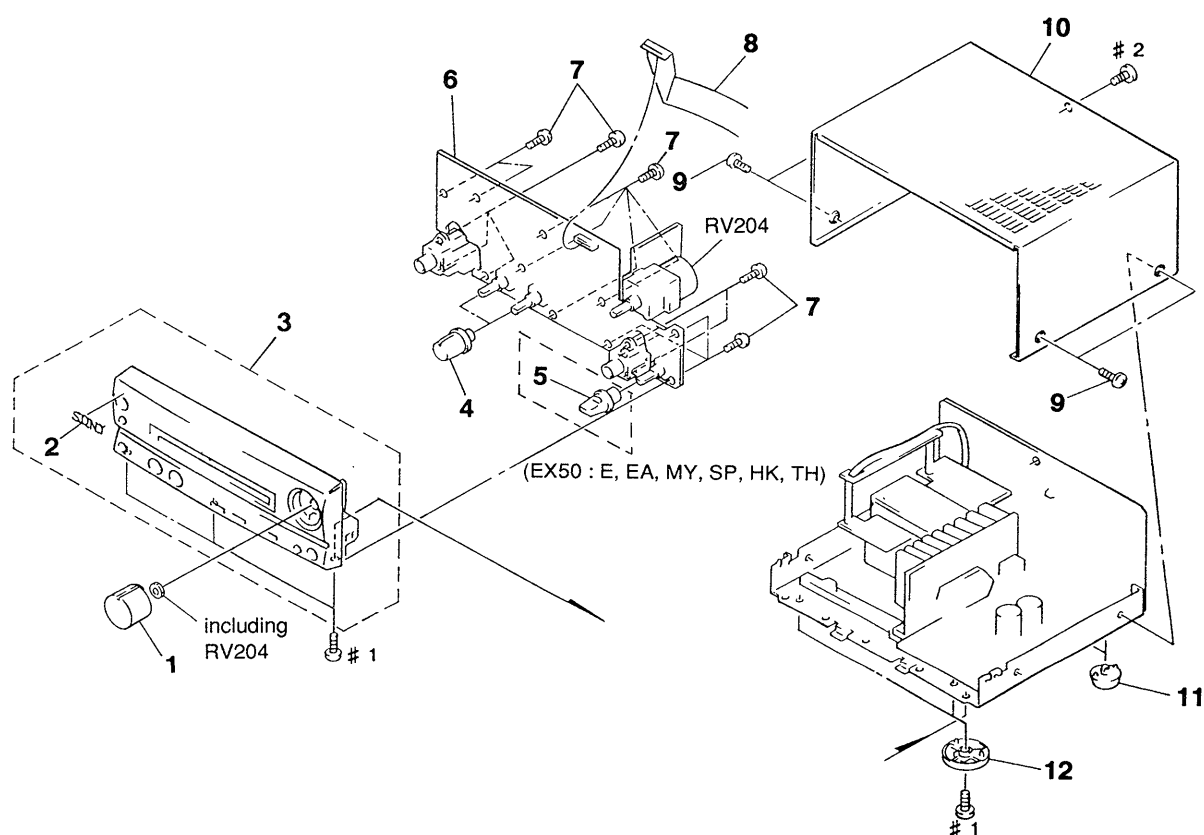

Ref.No.	Part No.	Description	Remark	Ref.No.	Part No.	Description	Remark
1	4-970-944-21	KNOB (VOL) (BLACK)... (BLACK)		5	4-973-043-31	KNOB (KR) (EX50:E, EA, MY, SP, HK, TH)	
1	4-970-944-31	KNOB (VOL) (GRAY)... (SILVER)		* 6	A-4378-852-A	PANEL BOARD, COMPLETE (EX50:E, EA, MY, SP, HK, TH)	
2	4-962-708-11	EMBLEM (4-A), SONY		* 6	A-4378-855-A	PANEL BOARD, COMPLETE (EX90)	
3	X-4946-596-1	PANEL ASSY (GA), FRONT (GRAY)... (SILVER) (EX50:E, EA, MY, SP, HK)		* 6	A-4378-859-A	PANEL BOARD, COMPLETE (EX50:AEP, UK, G, IT, CIS)	
3	X-4946-597-1	PANEL ASSY (AEP) (S), FRONT (GRAY)... (SILVER) (EX50:AEP, UK, G, IT, CIS)		7	4-951-620-01	SCREW (2.6X8), +BVTP	
3	X-4946-599-1	PANEL ASSY (AEP), FRONT (GRAY)... (SILVER) (EX90)		8	1-773-187-11	WIRE (FLAT TYPE) (23 CORE)	
3	X-4946-833-1	PANEL ASSY (AEP) (B), FRONT (BLACK)... (BLACK) (EX50:AEP, UK, G, IT)		9	3-363-099-01	SCREW (CASE 3 TP2)	
3	X-4946-954-1	PANEL ASSY, FRONT (GRAY)... (SILVER) (EX50:TH)		10	3-919-558-71	CASE (BLACK)... (BLACK) (EX50)	
4	4-970-965-21	KNOB (TONE) (BLACK)... (BLACK)		10	4-978-245-11	CASE (GRAY)... (SILVER)	
4	4-970-965-31	KNOB (TONE) (GRAY)... (SILVER)		10	4-978-245-31	CASE (GRAY)... (SILVER) (EX90)	
				11	4-965-822-01	FOOT	
				12	4-977-699-11	LEG (F)	
				RV204	1-223-811-11	RES, VAR, CARBON 100K/100K (VOLUME)	

3-2. CHASSIS SECTION

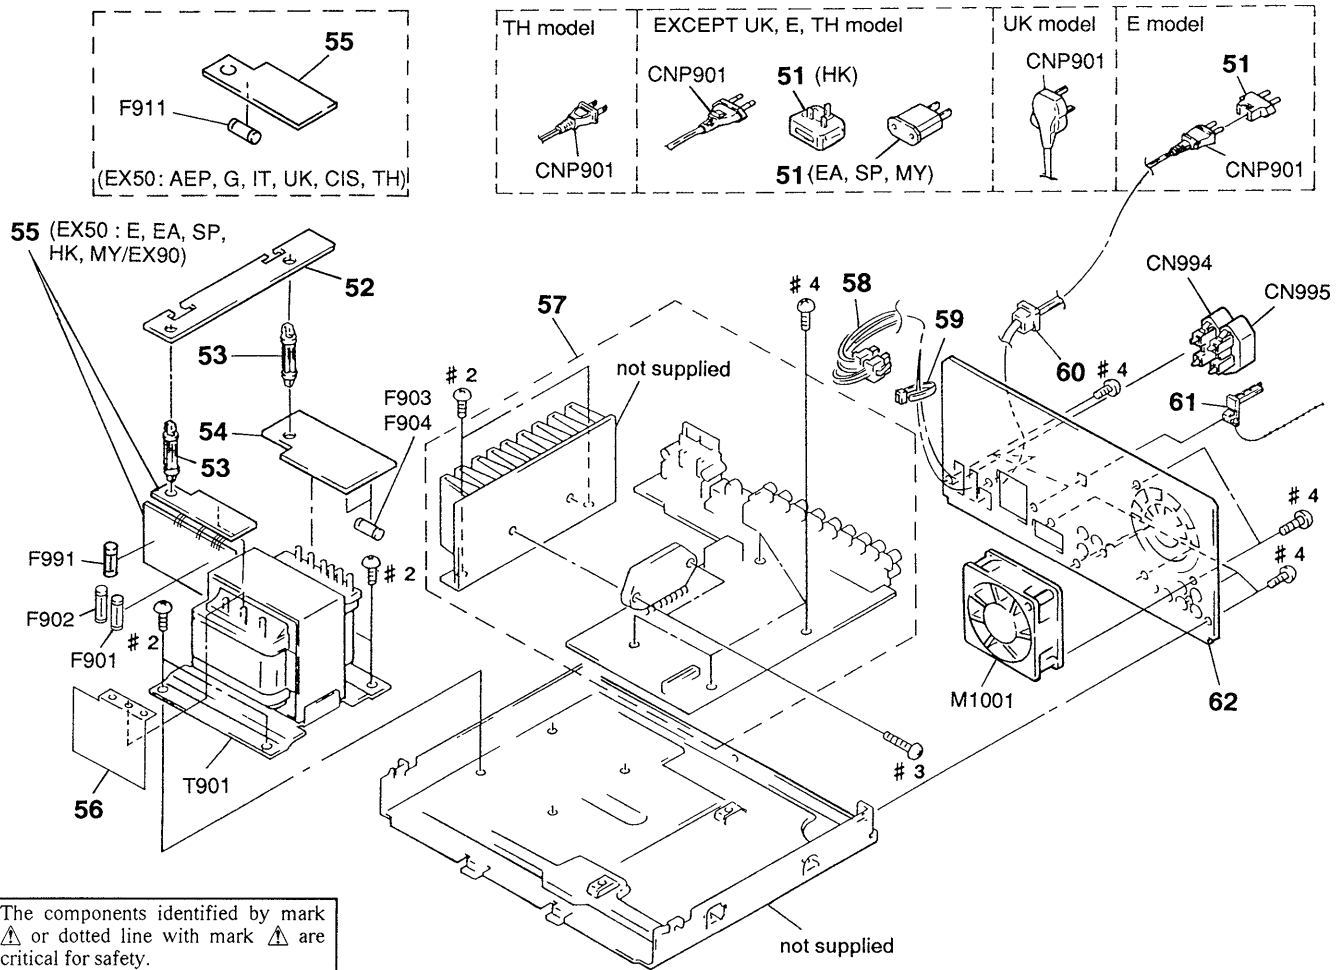

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
⚠51	1-569-007-11	ADAPTER, CONVERSION 2P (EX50:E)		* 62	4-978-969-31	PANEL, BACK (EX50:UK)	
⚠51	1-569-008-11	ADAPTER, CONVERSION 2P (EX50:EA, MY, SP)		* 62	4-978-969-51	PANEL, BACK (EX50:CIS)	
⚠51	1-770-019-11	ADAPTOR, CONVERSION PLUG 3P (EX50:HK)		* 62	4-978-974-01	PANEL, BACK (EX90:AEP)	
* 52	1-659-594-11	COVER BOARD		* 62	4-978-974-21	PANEL, BACK (EX90:IT)	
* 53	4-385-948-01	HOLDER, PCB		* 62	4-978-974-31	PANEL, BACK (EX90:UK)	
* 54	1-659-593-11	SECONDARY BOARD		⚠CN994	1-526-794-11	OUTLET, AC (AC OUTLET) (EX90)	
* 55	1-659-591-11	PRIMARY BOARD (EX50:AEP, UK, G, IT, CIS, TH)		⚠CN995	1-526-794-11	OUTLET, AC (AC OUTLET) (EX90)	
* 55	1-659-592-11	PRIMARY BOARD (EX50:E, EA, HK, MY, SP/EX90)		⚠CNP901	1-575-651-11	CORD, POWER (EX50:AEP, G, IT, CIS, EA, MY, SP, HK/EX90:AEP, IT)	
* 56	4-978-612-02	SHEET, INSULATING		⚠CNP901	1-575-653-11	CORD, POWER (EX50:E)	
* 57	A-4364-898-A	MAIN ASSY BOARD, COMPLETE (EX50:TH)		⚠CNP901	1-751-326-31	CORD, POWER (EX50:TH)	
* 57	A-4378-853-A	MAIN BOARD, COMPLETE (EX50:E, EA, MY, SP, HK, TH)		⚠CNP901	1-751-520-21	CORD, POWER (EX50:UK/EX90:UK)	
* 57	A-4378-856-A	MAIN BOARD, COMPLETE (EX90)		⚠F901	1-532-078-00	FUSE, TIME LAG (T1.0AL, 250V) (EX50:E, EA, MY, SP, HK, TH)	
* 57	A-4378-860-A	MAIN BOARD, COMPLETE (EX50:AEP, UK, G, IT, CIS)		⚠F901	1-532-285-00	FUSE, TIME LAG (T1.25AL, 250V) (EX90)	
58	1-776-429-11	CORD (WITH CONNECTOR) (EX90)		⚠F902	1-532-286-00	FUSE, TIME LAG (T2.5AL, 250V) (EX50:E, EA, MY, SP, HK)	
59	3-655-653-01	BAND (TAITON), BINDING (EX90:UK)		⚠F903	1-532-286-00	FUSE, TIME LAG (T2.5AL, 250V)	
* 60	3-703-244-00	BUSHING (2104), CORD (EX50:AEP, UK, G, IT, CIS, EA, MY, SP, HK/EX90)		⚠F904	1-532-286-00	FUSE, TIME LAG (T2.5AL, 250V)	
60	3-703-571-11	BUSHING (S) (4516), CORD (EX50:E, TH)		⚠F911	1-532-078-00	FUSE, TIME LAG (T1.0AL, 250V) (EX50:TH)	
61	4-956-370-02	BAND, PLUG FIXED (EX50:UK, HK/EX90:UK)		⚠F911	1-532-285-00	FUSE, TIME LAG (T1.25AL, 250V) (EX50:AEP, UK, G, IT, CIS)	
* 62	4-978-966-01	PANEL, BACK (EX50:E, MY, SP)		⚠F991	1-532-286-00	FUSE, TIME LAG (T2.5AL, 250V) (EX90)	
* 62	4-978-966-11	PANEL, BACK (EX50:HK)		⚠M1001	1-698-720-11	MOTOR, FAN (DC) (EX90)	
* 62	4-978-966-31	PANEL, BACK (EX50:EA)		⚠T901	1-429-311-11	TRANSFORMER, POWER (EX50:E, EA, MY, SP, HK, TH)	
* 62	4-978-966-41	PANEL, BACK (EX50:TH)		⚠T901	1-429-312-11	TRANSFORMER, POWER (EX90)	
* 62	4-978-969-01	PANEL, BACK (EX50:AEP)		⚠T901	1-429-484-11	TRANSFORMER, POWER (EX50:AEP, UK, G, IT, CIS)	
* 62	4-978-969-11	PANEL, BACK (EX50:G)					
* 62	4-978-969-21	PANEL, BACK (EX50:IT)					

SECTION 4

ELECTRICAL PARTS LIST

COVER

MAIN

NOTE:

The components identified by mark Δ or dotted line with mark Δ are critical for safety.
Replace only with part number specified.

When indicating parts by reference number, please include the board name.

- Due to standardization, replacements in the parts list may be different from the parts specified in the diagrams or the components used on the set.
- Items marked "*" are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- RESISTORS
All resistors are in ohms
METAL: Metal-film resistor
METAL OXIDE: Metal Oxide-film resistor
F : nonflammable
- COILS
uH : μ H

- SEMICONDUCTORS
In each case, u: μ , for example:
uA...: μ A..., uPA...: μ PA..., uPB...: μ PB...,
uPC...: μ PC..., uPD...: μ PD...
- CAPACITORS
uF : μ F
- Abbreviation
G : German model
IT : Italian model
EA : Saudi Arabia model
HK : Hong Kong model
SP : Singapore model
MY : Malaysia model
TH : Thailand model

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
*	1-659-594-11	COVER BOARD *****		C510	1-162-282-31	CERAMIC 100PF 10% 50V	
*****				C531	1-162-306-11	CERAMIC 0.01uF 30% 16V	
*	A-4378-853-A	MAIN BOARD, COMPLETE (EX50:E, EA, HK, MY, SP, TH) *****		C532	1-162-306-11	CERAMIC 0.01uF 30% 16V	
				C533	1-162-306-11	CERAMIC 0.01uF 30% 16V	
				C534	1-162-306-11	CERAMIC 0.01uF 30% 16V	
				C560	1-162-282-31	CERAMIC 100PF 10% 50V	
				C601	1-162-294-31	CERAMIC 0.001uF 10% 50V (EX50:E, EA, HK, MY, SP, TH)	
*	A-4378-856-A	MAIN BOARD, COMPLETE (EX90) *****		C602	1-162-306-11	CERAMIC 0.01uF 30% 16V (EX50:E, EA, HK, MY, SP, TH)	
*	A-4378-860-A	MAIN BOARD, COMPLETE (EX50:AEP, UK, G, IT, CIS) *****		C603	1-162-282-31	CERAMIC 100PF 10% 50V (EX50:E, EA, HK, MY, SP, TH)	
				C604	1-162-215-31	CERAMIC 47PF 5% 50V (EX50:E, EA, HK, MY, SP, TH)	
	7-685-646-79	SCREW +BVTP 3X8 TYPE2 N-S		C605	1-104-664-11	ELECT 47uF 20% 16V	
		< CAPACITOR >		C606	1-124-907-11	ELECT 10uF 20% 50V	
C301	1-126-961-11	ELECT 2.2uF 20% 50V		C651	1-162-294-31	CERAMIC 0.001uF 10% 50V (EX50:E, EA, HK, MY, SP, TH)	
C303	1-162-282-31	CERAMIC 100PF 10% 50V		C652	1-162-306-11	CERAMIC 0.01uF 30% 16V (EX50:E, EA, HK, MY, SP, TH)	
C304	1-124-910-11	ELECT 47uF 20% 50V		C653	1-162-282-31	CERAMIC 100PF 10% 50V (EX50:E, EA, HK, MY, SP, TH)	
C305	1-124-910-11	ELECT 47uF 20% 50V		C654	1-162-215-31	CERAMIC 47PF 5% 50V (EX50:E, EA, HK, MY, SP, TH)	
C306	1-124-122-11	ELECT 100uF 20% 50V		C655	1-104-664-11	ELECT 47uF 20% 16V	
C307	1-124-907-11	ELECT 10uF 20% 50V		C656	1-124-907-11	ELECT 10uF 20% 50V	
C308	1-126-965-11	ELECT 22uF 20% 50V		C701	1-162-294-31	CERAMIC 0.001uF 10% 50V	
C309	1-164-159-11	CERAMIC 0.1uF 50V		C702	1-124-443-00	ELECT 100uF 20% 10V	
C310	1-136-163-00	FILM 0.068uF 5% 50V		C703	1-126-961-11	ELECT 2.2uF 20% 50V	
C311	1-136-163-00	FILM 0.068uF 5% 50V		C704	1-124-443-00	ELECT 100uF 20% 10V	
C312	1-124-910-11	ELECT 47uF 20% 50V		C711	1-126-965-11	ELECT 22uF 20% 50V	
C351	1-126-961-11	ELECT 2.2uF 20% 50V		C712	1-126-965-11	ELECT 22uF 20% 50V	
C353	1-162-282-31	CERAMIC 100PF 10% 50V		C761	1-126-965-11	ELECT 22uF 20% 50V	
C354	1-124-910-11	ELECT 47uF 20% 50V		C762	1-126-965-11	ELECT 22uF 20% 50V	
C355	1-124-910-11	ELECT 47uF 20% 50V		C804	1-136-165-00	FILM 0.1uF 5% 50V	
C356	1-124-122-11	ELECT 100uF 20% 50V		C805	1-126-138-11	ELECT 4700uF 20% 50V	
C357	1-124-907-11	ELECT 10uF 20% 50V		C807	1-126-968-11	ELECT 100uF 20% 35V	
C360	1-136-163-00	FILM 0.068uF 5% 50V		C808	1-124-443-00	ELECT 100uF 20% 10V	
C361	1-136-163-00	FILM 0.068uF 5% 50V		C809	1-124-472-11	ELECT 470uF 20% 10V	
C401	1-136-165-00	FILM 0.1uF 5% 50V (EX50:AEP, UK, G, IT, CIS/EX90)		C814	1-136-165-00	FILM 0.1uF 5% 50V	
C402	1-136-165-00	FILM 0.1uF 5% 50V (EX50:AEP, UK, G, IT, CIS/EX90)		C815	1-126-138-11	ELECT 4700uF 20% 50V	
C451	1-136-165-00	FILM 0.1uF 5% 50V (EX50:AEP, UK, G, IT, CIS/EX90)		C817	1-126-968-11	ELECT 100uF 20% 35V	
C452	1-136-165-00	FILM 0.1uF 5% 50V (EX50:AEP, UK, G, IT, CIS/EX90)		C818	1-124-443-00	ELECT 100uF 20% 10V	
				C819	1-124-472-11	ELECT 470uF 20% 10V	

MAIN

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
C821	1-136-153-00	FILM	0.01uF 5% 50V			< COIL >	
C822	1-126-952-11	ELECT	1000uF 20% 16V	L301	1-420-872-00	COIL, AIR-CORE	(EX50:AEP, UK, G, IT, CIS/EX90)
C824	1-124-472-11	ELECT	470uF 20% 10V	L351	1-420-872-00	COIL, AIR-CORE	(EX50:AEP, UK, G, IT, CIS/EX90)
C831	1-136-153-00	FILM	0.01uF 5% 50V			< TRANSISTOR >	
C1001	1-124-907-11	ELECT	10uF 20% 50V (EX90)	Q301	8-729-140-82	TRANSISTOR	2SA988-PAFAEA
C1003	1-126-096-11	ELECT	10uF 20% 35V (EX90)	Q302	8-729-900-36	TRANSISTOR	DTC124ES
C1004	1-126-096-11	ELECT	10uF 20% 35V (EX90)	Q303	8-729-119-78	TRANSISTOR	2SC2785-HFE
		< CONNECTOR >		Q351	8-729-140-82	TRANSISTOR	2SA988-PAFAEA
CN11	1-770-158-21	HOUSING, CONNECTOR 7P (SYSTEM CONTROL)		Q801	8-729-119-78	TRANSISTOR	2SC2785-HFE (EX90)
CN501	1-770-966-11	PIN, CONNECTOR (PCB) (V TYPE) 6P		Q809	8-729-140-96	TRANSISTOR	2SD774-34
* CN801	1-568-839-11	SOCKET, CONNECTOR 23P		Q819	8-729-140-97	TRANSISTOR	2SB734-34
CN1001	1-564-506-11	PLUG, CONNECTOR 3P (EX90)		Q1001	8-729-119-78	TRANSISTOR	2SC2785-HFE (EX90)
		< DIODE >		Q1002	8-729-118-00	TRANSISTOR	2SB1116-L (EX90)
D301	8-719-987-63	DIODE	1N4148M	Q1003	8-729-119-78	TRANSISTOR	2SC2785-HFE (EX90)
D302	8-719-987-63	DIODE	1N4148M			< RESISTOR >	
D351	8-719-987-63	DIODE	1N4148M	R301	1-249-417-11	CARBON	1K 5% 1/4W
D352	8-719-987-63	DIODE	1N4148M	R302	1-249-438-11	CARBON	56K 5% 1/4W
D702	8-719-987-63	DIODE	1N4148M	R303	1-249-415-11	CARBON	680 5% 1/4W
D801	8-719-987-63	DIODE	1N4148M (EX90)	R304	1-249-438-11	CARBON	56K 5% 1/4W
D803	8-719-987-63	DIODE	1N4148M	R305	1-260-103-11	CARBON	2.2K 5% 1/2W
D804	8-719-510-68	DIODE	D5SBA20F01	R306	1-260-103-11	CARBON	2.2K 5% 1/2W
D808	8-719-024-99	DIODE	11ES2-NTA2B	△R309	1-212-881-11	FUSIBLE	100 5% 1/4W F
D809	8-719-933-54	DIODE	HZS9A2L	△R310	1-217-151-00	METAL PLATE	0.22 10% 2W F
D813	8-719-987-63	DIODE	1N4148M	R311	1-249-417-11	CARBON	1K 5% 1/4W
D818	8-719-024-99	DIODE	11ES2-NTA2B	R312	1-249-431-11	CARBON	15K 5% 1/4W
D819	8-719-933-54	DIODE	HZS9A2L	R314	1-260-099-11	CARBON	1K 5% 1/2W
D1001	8-719-987-63	DIODE	1N4148M (EX90)	R316	1-260-099-11	CARBON	1K 5% 1/2W
D1002	8-719-987-63	DIODE	1N4148M (EX90)	R318	1-260-076-11	CARBON	10 5% 1/2W
D1051	8-719-987-63	DIODE	1N4148M (EX90)	R320	1-260-076-11	CARBON	10 5% 1/2W
		< IC >				(EX50:AEP, UK, G, IT, CIS/EX90)	
IC301	8-749-900-24	IC	STK-4162MK2 (EX50)	R322	1-249-429-11	CARBON	10K 5% 1/4W
IC301	8-749-920-10	IC	STK4172MK2 (EX90)	R323	1-247-881-00	CARBON	120K 5% 1/4W
IC501	8-759-000-47	IC	MC14051BCP	R324	1-249-437-11	CARBON	47K 5% 1/4W
IC502	8-759-000-47	IC	MC14051BCP	R325	1-249-417-11	CARBON	1K 5% 1/4W
IC503	8-759-000-48	IC	MC14052BCP	R326	1-249-439-11	CARBON	68K 5% 1/4W
IC504	8-759-000-49	IC	MC14066BCP (EX50:E, EA, HK, MY, SP, TH)	R327	1-249-437-11	CARBON	47K 5% 1/4W
IC601	8-759-710-59	IC	NJM4580D-D	R328	1-249-426-11	CARBON	5.6K 5% 1/4W
IC701	8-759-111-68	IC	UPC1237HA	R329	1-249-433-11	CARBON	22K 5% 1/4W
IC802	8-759-231-53	IC	TA7805S	△R330	1-212-849-00	FUSIBLE	4.7 5% 1/4W F
IC1001	8-759-377-68	IC	TA78L007AP-TPE6 (EX90)	R351	1-249-417-11	CARBON	1K 5% 1/4W
		< JACK >		R352	1-249-438-11	CARBON	56K 5% 1/4W
J501	1-770-015-11	JACK, PIN 6P(TUNER IN, CD IN, MD/DAT OUT)		R353	1-249-415-11	CARBON	680 5% 1/4W
J502	1-770-015-11	JACK, PIN 6P(MD/DAT IN, TAPE OUT, TAPE IN)		R354	1-249-438-11	CARBON	56K 5% 1/4W
J503	1-770-015-11	JACK, PIN 6P (VIDEO2/AUX IN, VIDEO1 OUT, VIDEO1 IN)		R355	1-260-103-11	CARBON	2.2K 5% 1/2W
				R356	1-260-103-11	CARBON	2.2K 5% 1/2W
				△R359	1-212-881-11	FUSIBLE	100 5% 1/4W F

The components identified by mark $\triangle$ or dotted line with mark $\triangle$ are critical for safety.
Replace only with part number specified.

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
△R360	1-217-151-00	METAL PLATE	0. 22 10% 2W F	R604	1-249-437-11	CARBON	47K 5% 1/4W
R361	1-249-417-11	CARBON	1K 5% 1/4W	R605	1-249-437-11	CARBON	47K 5% 1/4W
R362	1-249-431-11	CARBON	15K 5% 1/4W				(EX50:E, EA, HK, MY, SP, TH)
R368	1-260-076-11	CARBON	10 5% 1/2W	R606	1-249-441-11	CARBON	100K 5% 1/4W
R370	1-260-076-11	CARBON	10 5% 1/2W	R607	1-249-441-11	CARBON	100K 5% 1/4W
			(EX50:AEP, UK, G, IT, CIS/EX90)	R651	1-249-437-11	CARBON	47K 5% 1/4W
							(EX50:E, EA, HK, MY, SP, TH)
R401	1-260-076-11	CARBON	10 5% 1/2W	R652	1-249-437-11	CARBON	47K 5% 1/4W
			(EX50:AEP, UK, G, IT, CIS/EX90)				(EX50:AEP, UK, G, IT, CIS/EX90)
R451	1-260-076-11	CARBON	10 5% 1/2W	R652	1-249-434-11	CARBON	27K 5% 1/4W
			(EX50:AEP, UK, G, IT, CIS/EX90)				(EX50:E, EA, HK, MY, SP, TH)
R501	1-249-417-11	CARBON	1K 5% 1/4W	R653	1-249-437-11	CARBON	47K 5% 1/4W
R502	1-249-425-11	CARBON	4. 7K 5% 1/4W	R654	1-249-437-11	CARBON	47K 5% 1/4W
R503	1-249-417-11	CARBON	1K 5% 1/4W	R655	1-249-437-11	CARBON	47K 5% 1/4W
							(EX50:E, EA, HK, MY, SP, TH)
R504	1-249-425-11	CARBON	4. 7K 5% 1/4W	R656	1-249-441-11	CARBON	100K 5% 1/4W
R505	1-249-417-11	CARBON	1K 5% 1/4W	R701	1-249-429-11	CARBON	10K 5% 1/4W
R506	1-249-417-11	CARBON	1K 5% 1/4W	R702	1-249-441-11	CARBON	100K 5% 1/4W
R507	1-249-417-11	CARBON	1K 5% 1/4W	R703	1-249-430-11	CARBON	12K 5% 1/4W
R508	1-249-417-11	CARBON	1K 5% 1/4W	R704	1-249-437-11	CARBON	47K 5% 1/4W
R509	1-249-417-11	CARBON	1K 5% 1/4W	△R705	1-215-890-11	METAL OXIDE	470 5% 2W F
R512	1-249-429-11	CARBON	10K 5% 1/4W	R706	1-249-438-11	CARBON	56K 5% 1/4W
R514	1-249-429-11	CARBON	10K 5% 1/4W	R707	1-249-437-11	CARBON	47K 5% 1/4W
R521	1-249-417-11	CARBON	1K 5% 1/4W	R711	1-260-095-11	CARBON	470 5% 1/2W
R522	1-249-417-11	CARBON	1K 5% 1/4W	R713	1-249-441-11	CARBON	100K 5% 1/4W
R523	1-249-417-11	CARBON	1K 5% 1/4W	R761	1-260-095-11	CARBON	470 5% 1/2W
R531	1-249-429-11	CARBON	10K 5% 1/4W	R763	1-249-441-11	CARBON	100K 5% 1/4W
R532	1-249-429-11	CARBON	10K 5% 1/4W	R803	1-249-429-11	CARBON	10K 5% 1/4W
R533	1-249-429-11	CARBON	10K 5% 1/4W	R804	1-249-417-11	CARBON	1K 5% 1/4W (EX90)
R534	1-247-807-31	CARBON	100 5% 1/4W	R805	1-260-103-11	CARBON	2. 2K 5% 1/2W
R535	1-247-807-31	CARBON	100 5% 1/4W	R807	1-260-103-11	CARBON	2. 2K 5% 1/2W
R536	1-247-807-31	CARBON	100 5% 1/4W	R809	1-249-421-11	CARBON	2. 2K 5% 1/4W
R551	1-249-417-11	CARBON	1K 5% 1/4W	R813	1-249-429-11	CARBON	10K 5% 1/4W
R552	1-249-425-11	CARBON	4. 7K 5% 1/4W	R815	1-260-103-11	CARBON	2. 2K 5% 1/2W
R553	1-249-417-11	CARBON	1K 5% 1/4W	R817	1-260-103-11	CARBON	2. 2K 5% 1/2W
R554	1-249-425-11	CARBON	4. 7K 5% 1/4W	R819	1-249-421-11	CARBON	2. 2K 5% 1/4W
R555	1-249-417-11	CARBON	1K 5% 1/4W	R1001	1-249-433-11	CARBON	22K 5% 1/4W (EX90)
R556	1-249-417-11	CARBON	1K 5% 1/4W	R1002	1-249-441-11	CARBON	100K 5% 1/4W (EX90)
R557	1-249-417-11	CARBON	1K 5% 1/4W	R1003	1-249-441-11	CARBON	100K 5% 1/4W (EX90)
R558	1-249-417-11	CARBON	1K 5% 1/4W	R1004	1-249-429-11	CARBON	10K 5% 1/4W (EX90)
R559	1-249-417-11	CARBON	1K 5% 1/4W	R1006	1-249-441-11	CARBON	100K 5% 1/4W (EX90)
R562	1-249-429-11	CARBON	10K 5% 1/4W	R1007	1-249-441-11	CARBON	100K 5% 1/4W (EX90)
R564	1-249-429-11	CARBON	10K 5% 1/4W	R1051	1-249-433-11	CARBON	22K 5% 1/4W (EX90)
R571	1-249-417-11	CARBON	1K 5% 1/4W				< RELAY >
R572	1-249-417-11	CARBON	1K 5% 1/4W				
R573	1-249-417-11	CARBON	1K 5% 1/4W				
R601	1-249-437-11	CARBON	47K 5% 1/4W				
			(EX50:E, EA, HK, MY, SP, TH)	RY701	1-515-920-11	RELAY (24V)	
R602	1-249-437-11	CARBON	47K 5% 1/4W				< TERMINAL >
			(EX50:AEP, UK, G, IT, CIS/EX90)				
R602	1-249-434-11	CARBON	27K 5% 1/4W				
			(EX50:E, EA, HK, MY, SP, TH)	TB401	1-537-240-11	TERMINAL BOARD (CHECKER PIN) (SPEAKER)	
R603	1-249-437-11	CARBON	47K 5% 1/4W				

The components identified by mark △ or dotted line with mark △ are critical for safety.
Replace only with part number specified.

MAIN

PANEL

Consisting the following section
in the panel. (HP, MIC, VOL)

Ref.No.	Part No.	Description	Remark
< THERMISTOR >			
TH1001	1-807-796-11	THERMISTOR (EX90)	

*	A-4378-852-A	PANEL BOARD, COMPLETE (EX50:E, EA, HK, MY, SP, TH)	

*	A-4378-855-A	PANEL BOARD, COMPLETE (EX90)	

*	A-4378-859-A	PANEL BOARD, COMPLETE (EX50:AEP, UK, G, IT, CIS)	

(Including HP, MIC, VOL BOARD)			
	1-690-880-11	LEAD (WITH CONNECTOR)	
< CAPACITOR >			
C100	1-162-306-11	CERAMIC 0.01uF 30% 16V	
C101	1-162-306-11	CERAMIC 0.01uF 30% 16V	
C102	1-124-907-11	ELECT 10uF 20% 50V	
C104	1-164-159-11	CERAMIC 0.1uF 50V	
C106	1-126-968-11	ELECT 100uF 20% 6.3V	
C107	1-162-306-11	CERAMIC 0.01uF 30% 16V	
C111	1-126-968-11	ELECT 100uF 20% 6.3V	
C112	1-164-159-11	CERAMIC 0.1uF 50V	
C113	1-162-282-31	CERAMIC 100PF 10% 50V	
C204	1-124-257-00	ELECT 2.2uF 20% 50V	
C205	1-126-963-11	ELECT 4.7uF 20% 50V	
C206	1-162-282-31	CERAMIC 100PF 10% 50V	
C207	1-162-217-31	CERAMIC 56PF 5% 50V	
C208	1-126-963-11	ELECT 4.7uF 20% 50V	
C209	1-136-157-00	FILM 0.022uF 5% 50V	
C210	1-136-163-00	FILM 0.068uF 5% 50V	
C211	1-136-167-00	FILM 0.15uF 5% 50V	
C212	1-136-173-00	FILM 0.47uF 5% 50V	
C213	1-126-963-11	ELECT 4.7uF 20% 50V	
C221	1-164-159-11	CERAMIC 0.1uF 50V (EX50:E, EA, HK, MY, SP, TH)	
C223	1-162-282-31	CERAMIC 100PF 10% 50V (EX50:E, EA, HK, MY, SP, TH)	
C224	1-162-286-31	CERAMIC 220PF 10% 50V (EX50:E, EA, HK, MY, SP, TH)	
C225	1-164-159-11	CERAMIC 0.1uF 50V (EX50:E, EA, HK, MY, SP, TH)	
C226	1-164-159-11	CERAMIC 0.1uF 50V (EX50:E, EA, HK, MY, SP, TH)	
C227	1-162-282-31	CERAMIC 100PF 10% 50V (EX50:E, EA, HK, MY, SP, TH)	
C228	1-162-286-31	CERAMIC 220PF 10% 50V (EX50:E, EA, HK, MY, SP, TH)	

Ref.No.	Part No.	Description	Remark
C229	1-124-464-11	ELECT 0.22uF 20% 50V (EX50:E, EA, HK, MY, SP, TH)	
C230	1-104-663-11	ELECT 33uF 20% 16V (EX50:E, EA, HK, MY, SP, TH)	
C231	1-104-663-11	ELECT 33uF 20% 16V (EX50:E, EA, HK, MY, SP, TH)	
C232	1-162-286-31	CERAMIC 220PF 10% 50V (EX50:AEP, UK, G, IT, CIS/EX90)	
C233	1-162-286-31	CERAMIC 220PF 10% 50V (EX50:AEP, UK, G, IT, CIS/EX90)	
C240	1-164-159-11	CERAMIC 0.1uF 50V	
C255	1-126-963-11	ELECT 4.7uF 20% 50V	
C256	1-162-282-31	CERAMIC 100PF 10% 50V	
C257	1-162-217-31	CERAMIC 56PF 5% 50V	
C258	1-126-963-11	ELECT 4.7uF 20% 50V	
C259	1-136-157-00	FILM 0.022uF 5% 50V	
C260	1-136-163-00	FILM 0.068uF 5% 50V	
C261	1-136-167-00	FILM 0.15uF 5% 50V	
C262	1-136-173-00	FILM 0.47uF 5% 50V	
C263	1-126-963-11	ELECT 4.7uF 20% 50V	
< CONNECTOR >			
* CN101	1-568-839-11	SOCKET, CONNECTOR 23P	
CN201	1-764-341-11	PIN, CONNECTOR (PCB) (L TYPE) 4P	
< DIODE >			
D101	8-719-046-44	DIODE SEL5221S (TUNER)	
D102	8-719-046-44	DIODE SEL5221S (CD)	
D103	8-719-046-44	DIODE SEL5221S (MD)	
D104	8-719-046-44	DIODE SEL5221S (TAPE)	
D105	8-719-046-44	DIODE SEL5221S (VIDEO2/AUX)	
D106	8-719-046-44	DIODE SEL5221S (VIDEO1)	
D107	8-719-046-44	DIODE SEL5221S (SOURCE DIRECT)	
D108	8-719-046-44	DIODE SEL5221S (-20dB MUTING)	
D109	8-719-987-63	DIODE 1N4148M	
D110	8-719-987-63	DIODE 1N4148M	
D111	8-719-987-63	DIODE 1N4148M	
D112	8-719-987-63	DIODE 1N4148M	
D113	8-719-046-44	DIODE SEL5221S (KARAOKE PON) (EX50:E, EA, HK, MY, SP, TH)	
D114	8-719-046-44	DIODE SEL5221S (ON/STANDBY)	
< IC >			
IC101	8-759-386-85	IC M37471M2-S1	
IC102	8-749-923-11	IC GP1U58XB (R)	
IC103	8-759-165-80	IC PST600C-T	
IC104	8-759-962-08	IC BA6208	
IC201	8-759-634-51	IC M5218AP	
IC202	8-759-000-48	IC MC14052BCP	
IC221	8-759-634-51	IC M5218AP (EX50:E, EA, HK, MY, SP, TH)	

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
< JACK >				R116	1-249-393-11	CARBON	10 5% 1/4W
J201	1-507-854-00	JACK, PHONE (MIX MIC)		R117	1-249-437-11	CARBON	47K 5% 1/4W
		(EX50:E, EA, HK, MY, SP, TH)		R119	1-249-409-11	CARBON	220 5% 1/4W
J202	1-507-854-00	JACK, PHONE (PHONES)		R120	1-249-409-11	CARBON	220 5% 1/4W
< TRANSISTOR >				R126	1-249-409-11	CARBON	220 5% 1/4W
		(EX50:E, EA, HK, MY, SP, TH)					(EX50:E, EA, HK, MY, SP, TH)
Q101	8-729-900-63	TRANSISTOR	DTA124ES	R127	1-247-807-31	CARBON	100 5% 1/4W
Q102	8-729-900-36	TRANSISTOR	DTC124ES	R130	1-249-441-11	CARBON	100K 5% 1/4W
Q103	8-729-900-36	TRANSISTOR	DTC124ES				
Q104	8-729-900-36	TRANSISTOR	DTC124ES	R131	1-249-425-11	CARBON	4. 7K 5% 1/4W
Q105	8-729-900-36	TRANSISTOR	DTC124ES	R132	1-249-425-11	CARBON	4. 7K 5% 1/4W
				R133	1-249-385-11	CARBON	2. 2 5% 1/6W
Q106	8-729-900-36	TRANSISTOR	DTC124ES	R134	1-247-807-31	CARBON	100 5% 1/4W
Q107	8-729-900-36	TRANSISTOR	DTC124ES	R200	1-249-429-11	CARBON	10K 5% 1/4W
Q108	8-729-900-36	TRANSISTOR	DTC124ES				
Q109	8-729-900-36	TRANSISTOR	DTC124ES	R201	1-249-421-11	CARBON	2. 2K 5% 1/4W
Q110	8-729-900-36	TRANSISTOR	DTC124ES	R202	1-249-409-11	CARBON	220 5% 1/4W
				R203	1-249-429-11	CARBON	10K 5% 1/4W
Q111	8-729-900-63	TRANSISTOR	DTA124ES	R204	1-249-417-11	CARBON	1K 5% 1/4W
Q112	8-729-900-36	TRANSISTOR	DTC124ES	R205	1-249-441-11	CARBON	100K 5% 1/4W
Q113	8-729-900-36	TRANSISTOR	DTC124ES				
Q114	8-729-900-36	TRANSISTOR	DTC124ES	R206	1-249-417-11	CARBON	1K 5% 1/4W
Q115	8-729-900-36	TRANSISTOR	DTC124ES	R207	1-247-903-00	CARBON	1M 5% 1/4W
		(EX50:E, EA, HK, MY, SP, TH)		R208	1-249-422-11	CARBON	2. 7K 5% 1/4W
				R209	1-249-429-11	CARBON	10K 5% 1/4W
Q116	8-729-900-63	TRANSISTOR	DTA124ES	R210	1-249-411-11	CARBON	330 5% 1/4W
		(EX50:E, EA, HK, MY, SP, TH)					
Q117	8-729-900-36	TRANSISTOR	DTC124ES	R212	1-249-409-11	CARBON	220 5% 1/4W
Q118	8-729-119-78	TRANSISTOR	2SC2785-HFE	R213	1-247-903-00	CARBON	1M 5% 1/4W
Q201	8-729-141-30	TRANSISTOR	2SC3623A-LK	R214	1-247-903-00	CARBON	1M 5% 1/4W
Q251	8-729-141-30	TRANSISTOR	2SC3623A-LK	R215	1-249-423-11	CARBON	3. 3K 5% 1/4W
				R216	1-249-417-11	CARBON	1K 5% 1/4W
< RESISTOR >							
R1	1-249-429-11	CARBON	10K 5% 1/4W	R219	1-247-903-00	CARBON	1M 5% 1/4W
		(EX50:E, EA, HK, MY, SP, TH)		R220	1-247-807-31	CARBON	100 5% 1/4W
R2	1-249-429-11	CARBON	10K 5% 1/4W	R221	1-249-441-11	CARBON	100K 5% 1/4W
		(EX50:AEP, UK, G, IT, CIS/EX90)					(EX50:E, EA, HK, MY, SP, TH)
R100	1-249-429-11	CARBON	10K 5% 1/4W	R222	1-249-417-11	CARBON	1K 5% 1/4W
R101	1-249-431-11	CARBON	15K 5% 1/4W				(EX50:E, EA, HK, MY, SP, TH)
R102	1-249-417-11	CARBON	1K 5% 1/4W	R223	1-249-431-11	CARBON	15K 5% 1/4W
							(EX50:E, EA, HK, MY, SP, TH)
R103	1-249-418-11	CARBON	1. 2K 5% 1/4W	R224	1-249-441-11	CARBON	100K 5% 1/4W
R104	1-249-418-11	CARBON	1. 2K 5% 1/4W				(EX50:E, EA, HK, MY, SP, TH)
R105	1-249-419-11	CARBON	1. 5K 5% 1/4W	R225	1-249-417-11	CARBON	1K 5% 1/4W
R106	1-249-427-11	CARBON	6. 8K 5% 1/4W				(EX50:E, EA, HK, MY, SP, TH)
R107	1-249-423-11	CARBON	3. 3K 5% 1/4W	R226	1-249-435-11	CARBON	33K 5% 1/4W
							(EX50:E, EA, HK, MY, SP, TH)
R108	1-249-429-11	CARBON	10K 5% 1/4W	R227	1-249-441-11	CARBON	100K 5% 1/4W
R109	1-249-428-11	CARBON	8. 2K 5% 1/4W				(EX50:E, EA, HK, MY, SP, TH)
		(EX50:E, EA, HK, MY, SP, TH)		R228	1-249-441-11	CARBON	100K 5% 1/4W
R110	1-249-409-11	CARBON	220 5% 1/4W				(EX50:E, EA, HK, MY, SP, TH)
R111	1-249-409-11	CARBON	220 5% 1/4W	R229	1-249-417-11	CARBON	1K 5% 1/4W
R112	1-249-429-11	CARBON	10K 5% 1/4W				(EX50:E, EA, HK, MY, SP, TH)
				R230	1-249-409-11	CARBON	220 5% 1/4W
R113	1-249-417-11	CARBON	1K 5% 1/4W				(EX50:E, EA, HK, MY, SP, TH)
R114	1-249-429-11	CARBON	10K 5% 1/4W	R231	1-249-409-11	CARBON	220 5% 1/4W
R115	1-249-429-11	CARBON	10K 5% 1/4W				(EX50:E, EA, HK, MY, SP, TH)

PANEL

PRIMARY

SECONDARY

Ref. No.	Part No.	Description	Remark
R251	1-249-421-11	CARBON	2.2K 5% 1/4W
R252	1-249-409-11	CARBON	220 5% 1/4W
R253	1-249-429-11	CARBON	10K 5% 1/4W
R255	1-249-429-11	CARBON	10K 5% 1/4W
R256	1-249-417-11	CARBON	1K 5% 1/4W
R257	1-247-903-00	CARBON	1M 5% 1/4W
R258	1-249-422-11	CARBON	2.7K 5% 1/4W
R259	1-249-429-11	CARBON	10K 5% 1/4W
R260	1-249-411-11	CARBON	330 5% 1/4W
R262	1-249-409-11	CARBON	220 5% 1/4W
R263	1-247-903-00	CARBON	1M 5% 1/4W
R264	1-247-903-00	CARBON	1M 5% 1/4W
R265	1-249-423-11	CARBON	3.3K 5% 1/4W
R266	1-249-417-11	CARBON	1K 5% 1/4W
R269	1-247-903-00	CARBON	1M 5% 1/4W
R270	1-247-807-31	CARBON	100 5% 1/4W
< VARIABLE RESISTOR >			
RV201	1-223-973-11	RES, VAR, CARBON 10K/10K (TREBLE)	
RV202	1-223-973-11	RES, VAR, CARBON 10K/10K (BASS)	
RV204	1-223-811-11	RES, VAR, CARBON 100K/100K (VOLUME)	
RV221	1-223-974-11	RES, VAR, CARBON 50K (MIC LEVEL)	(EX50:E, EA, HK, MY, SP, TH)
< SWITCH >			
S101	1-554-303-21	SWITCH, TACTILE (SYSTEM POWER)	
S102	1-554-303-21	SWITCH, TACTILE (TUNER)	
S103	1-554-303-21	SWITCH, TACTILE (CD)	
S104	1-554-303-21	SWITCH, TACTILE (MD)	
S105	1-554-303-21	SWITCH, TACTILE (TAPE)	
S106	1-554-303-21	SWITCH, TACTILE (VIDEO2/AUX)	
S107	1-554-303-21	SWITCH, TACTILE (VIDEO1)	
S108	1-554-303-21	SWITCH, TACTILE (-20dB MUTING)	
S109	1-554-303-21	SWITCH, TACTILE (SOURCE DIRECT)	
S110	1-554-303-21	SWITCH, TACTILE (KARAOKE PON)	(EX50:E, EA, HK, MY, SP, TH)
< VIBRATOR >			
X101	1-579-125-11	VIBRATOR, CERAMIC (8MHz)	

*	1-659-591-11	PRIMARY BOARD (EX50:AEP, UK, G, IT, CIS, TH)	*****
*	1-659-592-11	PRIMARY BOARD (EX50:E, EA, HK, MY, SP/EX90)	*****
	1-533-217-31	HOLDER, FUSE	
< CAPACITOR >			
△C991	1-113-925-51	ELECT	0.01uF 20% 250V(EX90)

Ref. No.	Part No.	Description	Remark
< CONNECTOR >			
CN900	1-564-321-00	PIN, CONNECTOR 2P	(EX50:E, EA, HK, MY, SP/EX90)
CN911	1-564-321-00	PIN, CONNECTOR 2P	(EX50:AEP, UK, G, IT, CIS, TH)
CN991	1-580-230-11	PIN, CONNECTOR (PC BOARD) 2P	(EX90)
CN992	1-580-230-11	PIN, CONNECTOR (PC BOARD) 2P	(EX90)
CN993	1-764-325-11	PIN, CONNECTOR (PCB) (V TYPE) 2P	(EX90)
< FUSE >			
△F901	1-532-078-00	FUSE, TIME LAG (T1.0AL 250V)	(EX50:E, EA, HK, MY, SP)
△F901	1-532-285-00	FUSE, TIME LAG (T1.25AL 250V)	(EX90)
△F902	1-532-286-00	FUSE, TIME LAG (T2.5AL 250V)	(EX50:E, EA, HK, MY, SP)
△F911	1-532-078-00	FUSE, TIME LAG (T1.0AL 250V)	(EX50:TH)
△F911	1-532-285-00	FUSE, TIME LAG (T1.25AL 250V)	(EX50:AEP, UK, G, IT, CIS)
△F991	1-532-286-00	FUSE, TIME LAG (T2.5AL 250V)	(EX90)
< RELAY >			
△RY991	1-755-018-11	RELAY (EX90)	
< SWITCH >			
S901	1-572-675-11	SWITCH, POWER VOLTAGE CHANGE	(VOLTAGE SELECTOR) (EX50:E, EA, HK, MY, SP)

*	1-659-593-11	SECONDARY BOARD	*****
	1-533-217-31	HOLDER, FUSE	
< CONNECTOR >			
CN901	1-770-966-11	PIN, CONNECTOR (PCB) (V TYPE) 6P	
CN902	1-764-326-11	PIN, CONNECTOR (PCB) (V TYPE) 3P	
< FUSE >			
△F903	1-532-286-00	FUSE, TIME LAG (T2.5AL 250V)	
△F904	1-532-286-00	FUSE, TIME LAG (T2.5AL 250V)	

MISCELLANEOUS			

8	1-773-187-11	WIRE (FLAT TYPE) (23 CORE)	
△51	1-569-007-11	ADAPTER, CONVERSION 2P (EX50:E)	
△51	1-569-008-11	ADAPTER, CONVERSION 2P (EX50:EA, MY, SP)	
△51	1-770-019-11	ADAPTOR, CONVERSION PLUG 3P (EX50:HK)	
58	1-776-429-11	CORD (WITH CONNECTOR) (EX90)	

The components identified by mark △ or dotted line with mark △ are critical for safety.
Replace only with part number specified.

Ref. No.	Part No.	Description	Remark
△CNP994	1-526-794-11	OUTLET, AC (AC OUTLET) (EX90)	
△CNP995	1-526-794-11	OUTLET, AC (AC OUTLET) (EX90)	
△CNP901	1-575-651-11	CORD, POWER (EX50:AEP, G, IT, CIS, EA, MY, SP, HK/EX90:AEP, IT)	
△CNP901	1-575-653-11	CORD, POWER (EX50:E)	
△CNP901	1-751-326-31	CORD, POWER (EX50:TH)	
△CNP901	1-751-520-21	CORD, POWER (EX50:UK/EX90:UK)	
△F901	1-532-078-00	FUSE, TIME LAG (T1.0AL, 250V) (EX50:E, EA, MY, SP, HK, TH)	
△F901	1-532-285-00	FUSE, TIME LAG (T1.25AL, 250V) (EX90)	
△F902	1-532-286-00	FUSE, TIME LAG (T2.5AL, 250V) (EX50:E, EA, MY, SP, HK)	
△F903	1-532-286-00	FUSE, TIME LAG (T2.5AL, 250V)	
△F904	1-532-286-00	FUSE, TIME LAG (T2.5AL, 250V)	
△F911	1-532-078-00	FUSE, TIME LAG (T1.0AL, 250V) (EX50:TH)	
△F911	1-532-285-00	FUSE, TIME LAG (T1.25AL, 250V) (EX50:AEP, UK, G, IT, CIS)	
△F991	1-532-286-00	FUSE, TIME LAG (T2.5AL, 250V) (EX90)	
△M1001	1-698-720-11	MOTOR, FAN (DC) (EX90)	
RV204	1-223-811-11	RES, VAR, CARBON 100K/100K (VOLUME)	
△T901	1-429-311-11	TRANSFORMER, POWER (EX50:E, EA, MY, SP, HK, TH)	
△T901	1-429-312-11	TRANSFORMER, POWER (EX90)	
△T901	1-429-484-11	TRANSFORMER, POWER (EX50:AEP, UK, G, IT, CIS)	

ACCESSORIES & PACKING MATERIALS			

*	4-980-537-01	CUSHION (UPPER)	
*	4-980-538-01	CUSHION (LOWER)	

HARDWARE LIST			

#1	7-685-647-79	SCREW +BVTP 3X10 TYPE2 N-S	
#2	7-682-548-04	SCREW +BVTT 3X8 (S)	
#3	7-685-650-79	SCREW +BVTP 3X16 TYPE2 IT-3	
#4	7-685-646-79	SCREW +BVTP 3X8 TYPE2 N-S	

The components identified by mark △ or dotted line with mark △ are critical for safety.
Replace only with part number specified.

