




TWEETER T25CF003 E0036

NOMINAL IMPEDANCE	6 Ohms	VOICE COIL RESISTANCE	4,3 Ohms
RECOMMENDED FREQUENCY RANGE	2000-2500Hz	VOICE COIL INDUCTANCE (EQUIVALENT)	0,05 mH
SHORT TERM MAXIMUM POWER*	200 W	VOICE COIL DIAMETER	26 mm
LONG TERM MAXIMUM POWER*	90 W	VOICE COIL HEIGHT	1,5 mm
CHARACTERISTIC SENSITIVITY (2.83W,1m)	92 dB SPL	MOVING MASS	0,33 g
AIR GAP HEIGHT	2,0 mm	EFFECTIVE PISTON AREA	7,0 sq.cm
MAGNETIC GAP FLUX DENSITY	1,8 T	LINEAR COIL TRAVEL (p-p)	0,5 mm
FORCE FACTOR	3,5 N/A	FREE AIR RESONANCE	750 Hz
MAGNET WEIGHT	0,34 g		
TOTAL WEIGHT	0,80 Kg		

* IEC 268-5, VIA HIGH PASS BUTTERWORTH FILTER: 2500 Hz 12 dB/oct.

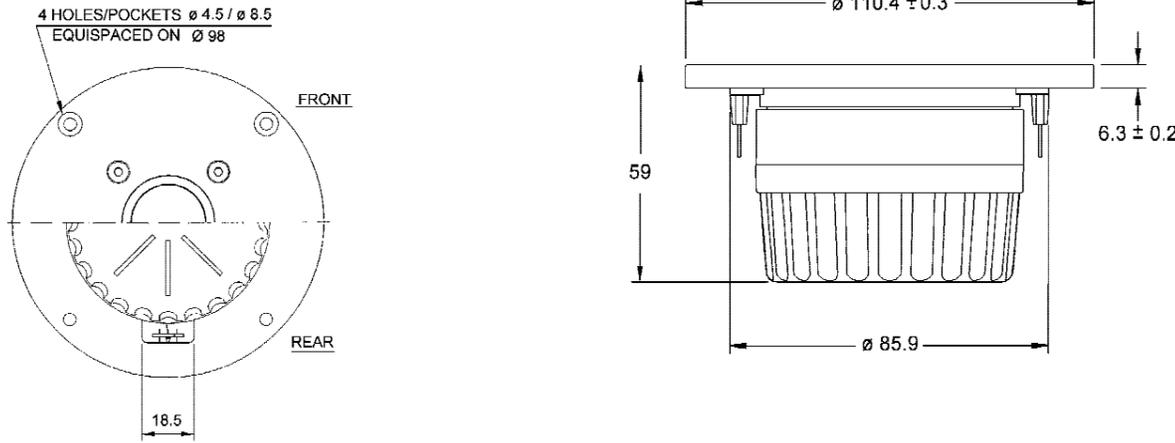

The T25-003 is a 25mm fabric dome with moderately high efficiency. It is the tweeter of choice for those who want the most precise and realistic reproduction of the high frequency audio range.

SPECIAL FEATURES

A wide, soft polymer surround designed to give high stability without magnetic fluid damping.

An optimally shaped diaphragm which gives well-controlled behaviour through the entire high frequency band. This diaphragm is produced from SONOTEX, a proprietary material developed and manufactured only by SEAS. The SONOTEX process pre-coats the fabric 4 times with a damping/sealing material, resulting in excellent acoustic performance and consistency.

Flexible lead-out wires which ensure a good connection between voice coil and terminals. This arrangement also helps to prevent lead breakage due to the large excursions encountered when low crossover frequencies are used.

6 mm solid metal front plate with a slight loading characteristic which ensures linear frequency response, and a stiff and stable connection to the cabinet.


A substantial injection-moulded rear chamber, with complex internal shape and reinforcing ribs, which eliminate unwanted chamber resonances and reflections.

A double magnet system which increases sensitivity and provides better control of the voice coil. This system also reduces the magnetic stray fields, making the T25-001 an ideal choice in high end A/V applications.

DEC.02

ET 25-25-003

Response curves in 0, 30 and 60 degrees angles, recorded in anechoic chamber (Free-field, 4 pi radiation) with 0.5m microphone distance. The loudspeaker is mounted in a 0.6m by 0.8m baffle.

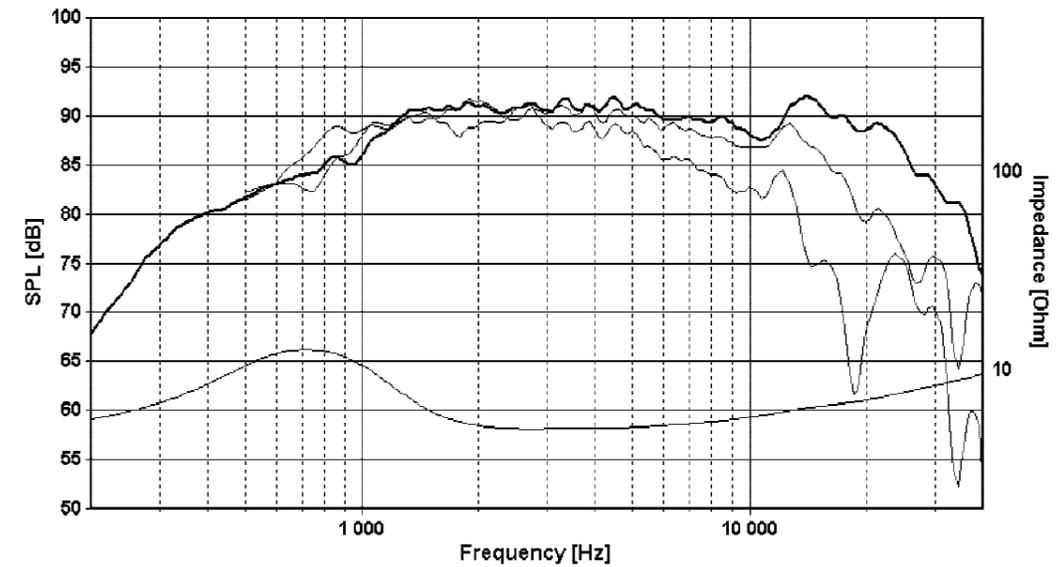

Cumulative spectral decay

