


D44000WX Paragon

JBL

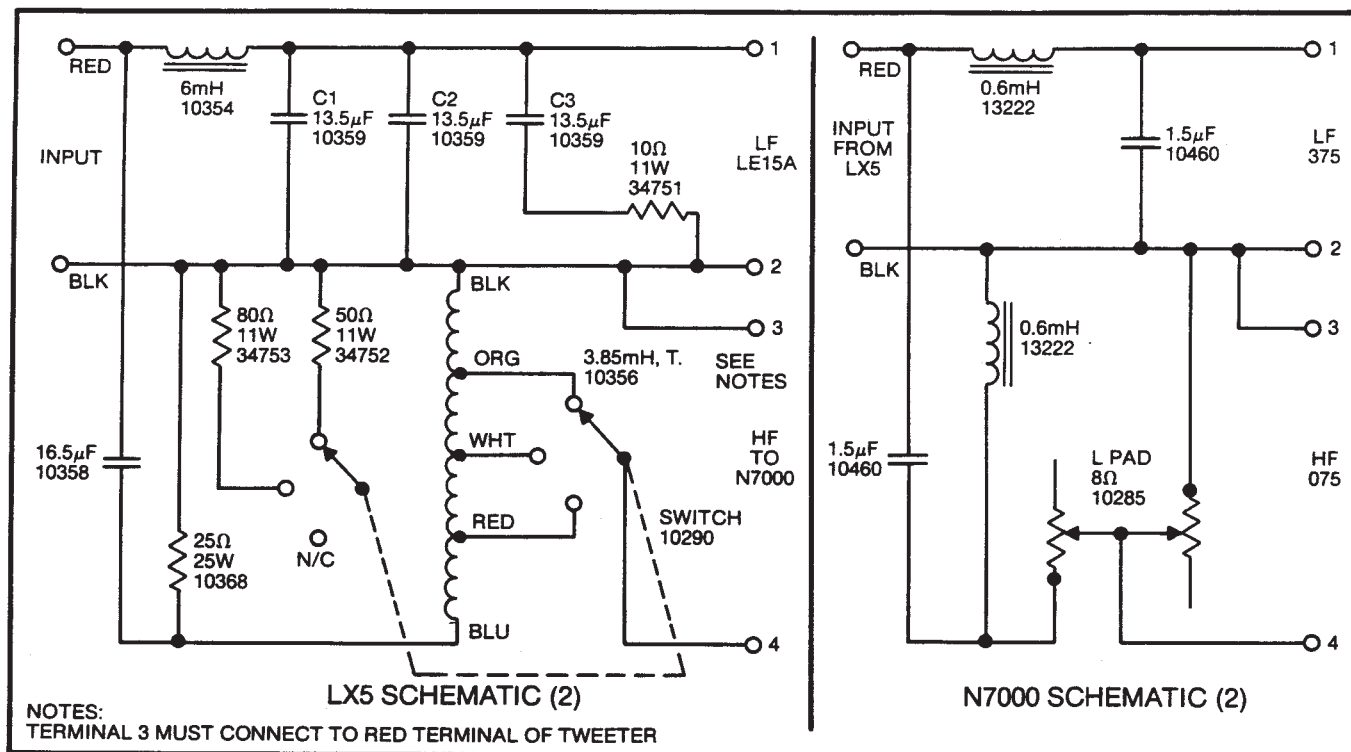

SYSTEM COMPONENTS:

LOW FREQUENCY DRIVER:

Cone Kit:	LE15A (2)
Nom. Impedance:	C16R2215
Dynamic Test Input V:	16 Ohm
Sweep Frequency Hz:	10
D.C. Resistance Ohms:	20-1200
Gap Gauge:	7.6 min/9.2 max
Notes:	.057"
If Not Serviceable, Replace With:	2235H
Visual Change:	Yes
Baffle Modification:	No
Exact Acoustic Replacement:	No. Use as last resort.
Replace both units in a stereo pair.	
Additional Parts Currently Available*:	
Dome:	21514
Mounting Gasket:	34499
Trim Gasket:	21058

MID RANGE DRIVER:

Diaphragm Kit:	375 (2)
Nom. Impedance:	D16R2440
Dynamic Test Input V:	16 Ohm
Sweep Frequency Hz:	3.5
D.C. Resistance Ohms:	350-1200
Gap Gauge:	7.3 min/8.6 max
Notes:	.036"
as alternate in pairs.	D16R2441 can be used
If Not Serviceable, Replace With:	2441
Visual Change:	Yes
Baffle Modification:	No
Exact Acoustic Replacement:	No. Slightly different
Replace both units in a stereo pair.	

HIGH FREQUENCY DRIVER:

Diaphragm Kit:	075 (2)
Nom. Impedance:	D8R075
Dynamic Test Input V:	8 Ohm
Sweep Frequency Hz:	7
D.C. Resistance Ohms:	1000-3000
Gap Gauge:	5.7 min/6.7 max
Notes:	.025"
Do not crease diaphragm.	
Test with network.	
Currently Available.	
If Not Serviceable, Replace With:	Currently Available.
Can also be replaced with 2402H.	
Visual Change:	Yes
Baffle Modification:	No
Exact Acoustic Replacement:	Yes
Additional Parts Currently Available*:	
Mounting Gasket:	51795

SYSTEM SPECIFICATIONS:

Nom. Impedance:	8 Ohm
Power Capacity:	125 Watts Continuous Program
Crossover Frequencies:	500 Hz, 7000 Hz
Sensitivity:	82dB (1 Watt @ 15 Feet)
Enclosure Dim:	35-1/2" x 103-5/8" x 24-1/16" D
	90cm x 263cm x 61cm
Shipping Weight:	695 lbs. - 316 kg.
Additional Parts Currently Available*:	
Binding Posts:	Red: 10243
	Black: 10244

*Other parts may also be available. Check with JBL for details.