


Instrumentation Rejector/Amplifier for THD Measurements

"Знайка"

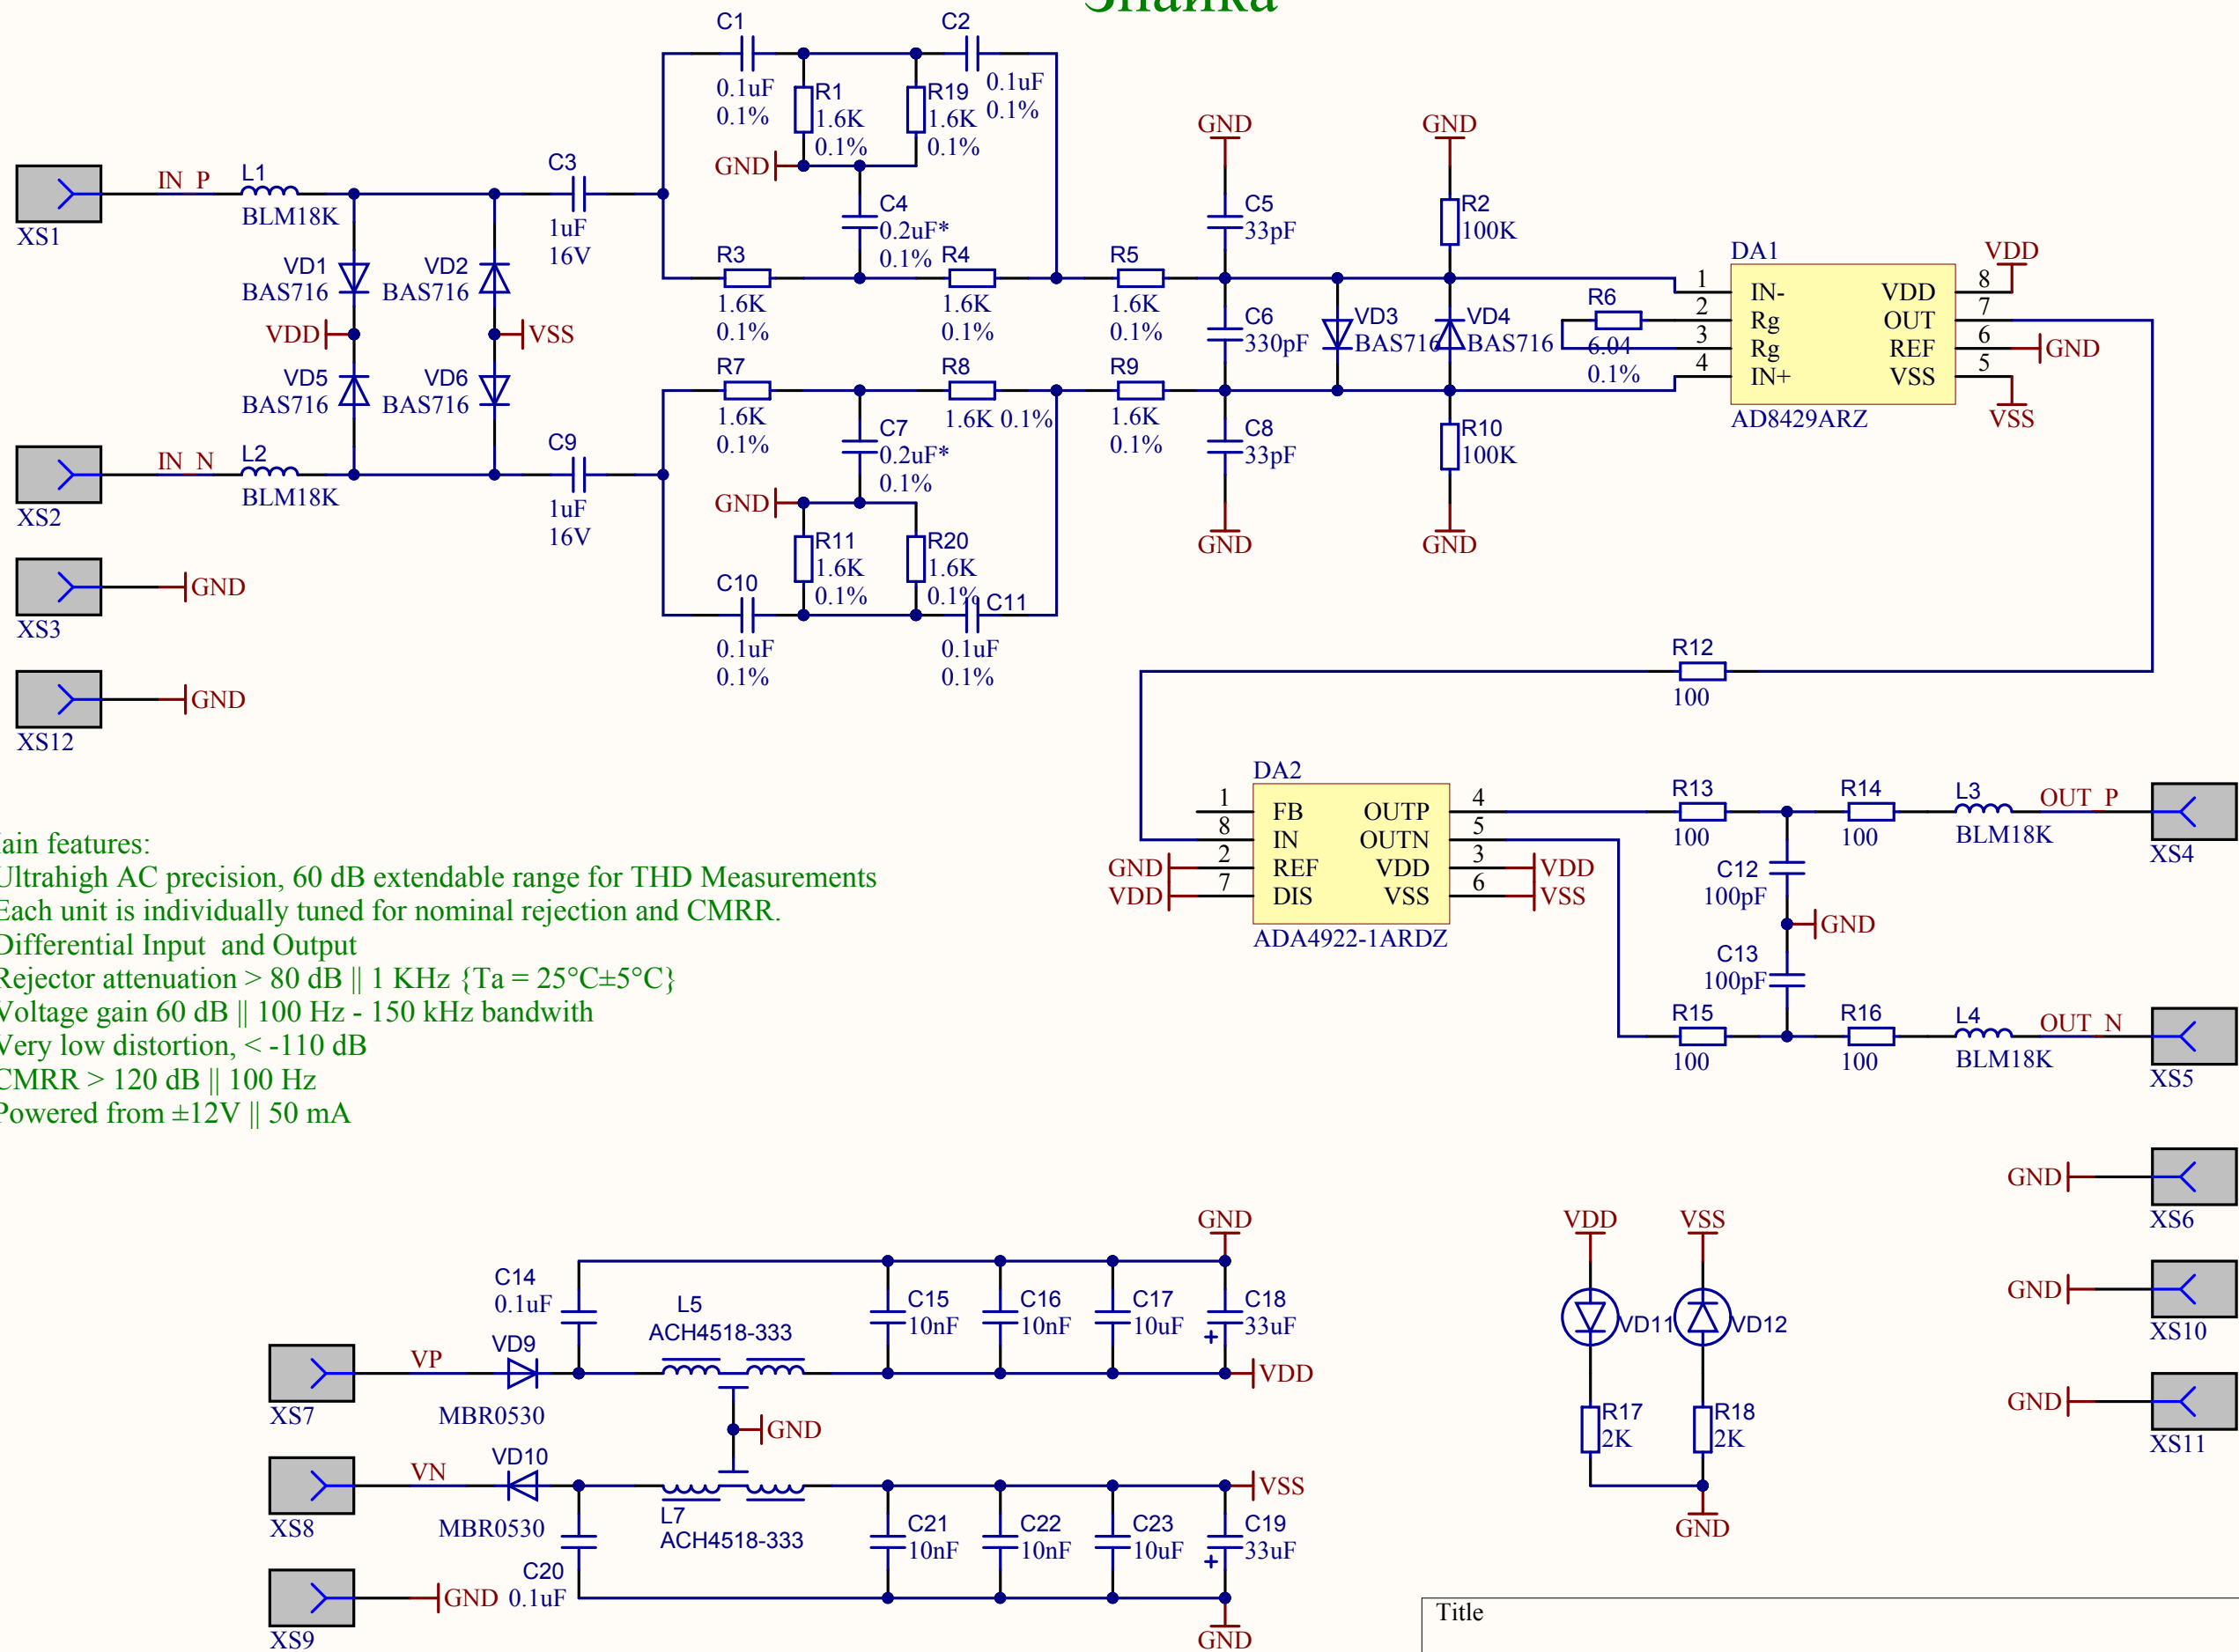

- Main features:
- Ultrahigh AC precision, 60 dB extendable range for THD Measurements
 - Each unit is individually tuned for nominal rejection and CMRR.
 - Differential Input and Output
 - Rejector attenuation > 80 dB || 1 KHz {Ta = 25°C±5°C}
 - Voltage gain 60 dB || 100 Hz - 150 kHz bandwidth
 - Very low distortion, < -110 dB
 - CMRR > 120 dB || 100 Hz
 - Powered from ±12V || 50 mA

Author: Pavel Guryev (Павел Гурьев) p.guryev@oriel.ru

Title		
Size	Number	Revision
A		
Date:	4/3/2012	Sheet of
File:	D:\WORK\...\znayka V1.0a.SchDoc	Drawn By: