

UNLESS OTHERWISE STATED: DIMENSIONS IN MILLIMETRES; REMOVE BURRS AND SHARP EDGES; ALL CASTINGS AND MOULDINGS TO BE FREE FROM SINKS AND BLEMISHES. DO NOT SCALE DRAWING

	1	2	3	4	5	6	7	8
--	---	---	---	---	---	---	---	---

A



B

C


D

E

F

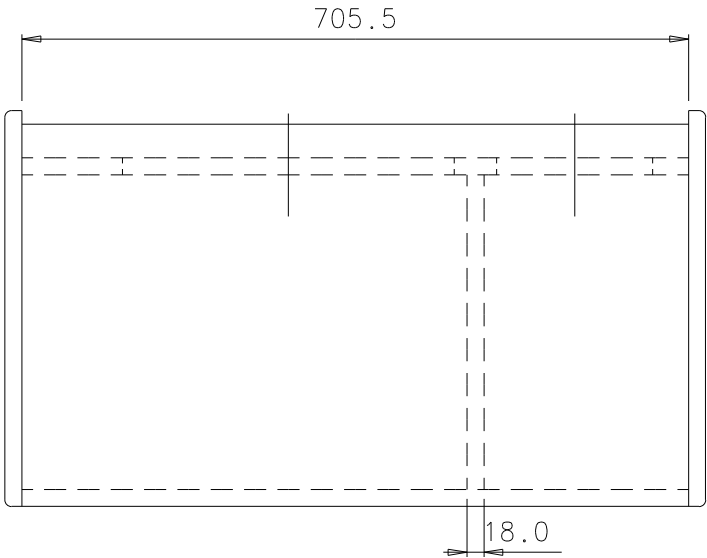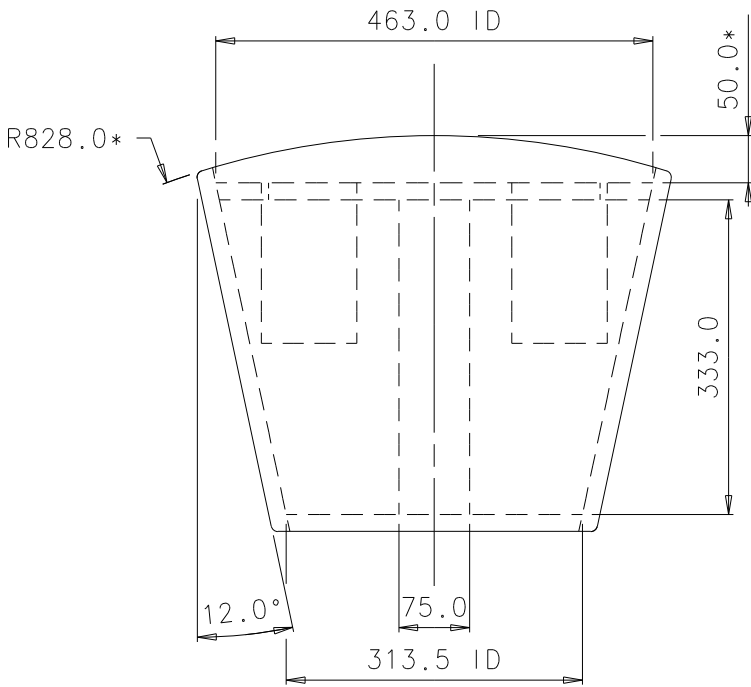

8 OFF M5 T-NUTS
EQUI-SPACED ON
A 370.0 PCD

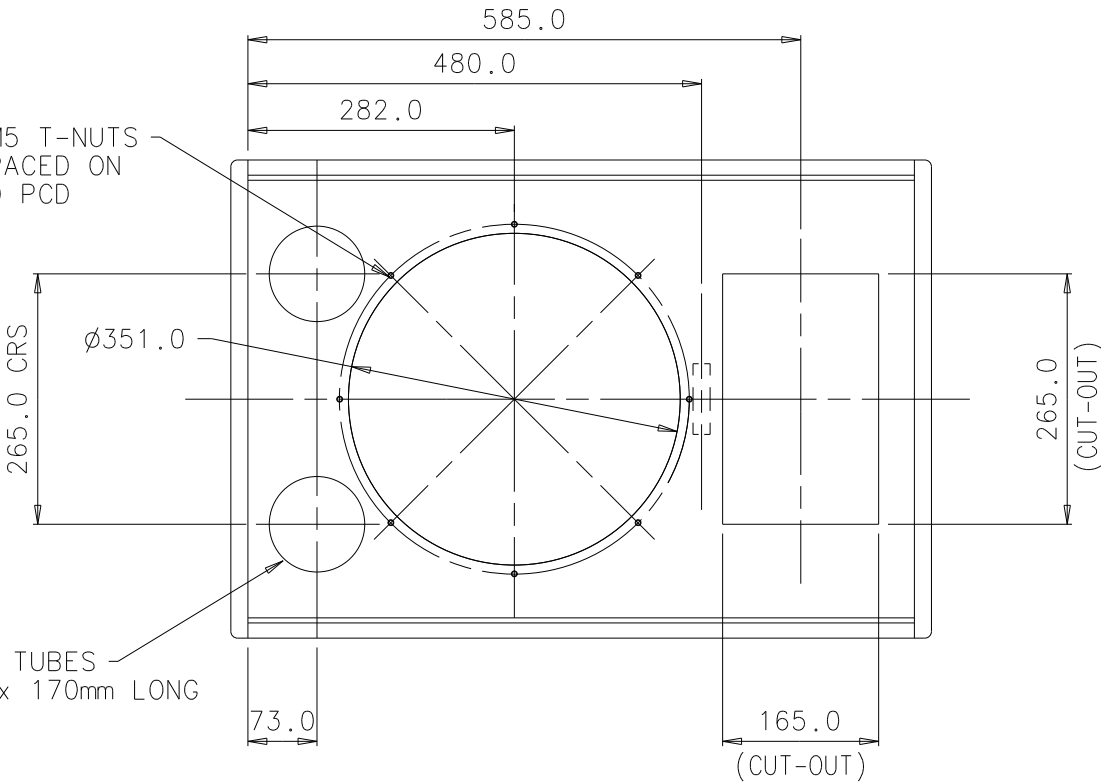



2 OFF PORT TUBES
Ø101.0 ID x 170mm LONG

- NOTES
- * DENOTES DIMENSIONS TO MANUFACTURERS DESIGN
 - CABINET MATERIAL - 18mm MDF/ 15mm OR 18mm MULTI-LAYER BIRCH PLYWOOD FOR FIXED INSULATION
15mm OR 18mm MULTI-LAYER BIRCH PLYWOOD FOR PORTABLE APPLICATION
 - CABINET CONSTRUCTION - JOINTS MUST BE AIRTIGHT AND BE SECURELY
GLUED & SCREWED TO AVOID UNWANTED VIBRATION.
 - ACOUSTIC WADDING - COVER THE TOP/BOTTOM/SIDES & REAR PANELS WITH
ACOUSTIC WADDING, ENSURE THAT THE WADDING DOES
NOT COVER PORT TUBES
 - DRIVE UNIT FIXING - T NUTS AND FIXING BOLTS ARE RECOMMENDED. USE A
SUITABLE GASKET BETWEEN THE DRIVE UNIT & CABINET
TO PREVENT AIR LEAKS
 - CELESTION LOUDSPEAKERS - LF = TRUVOX 1525 PART No T5327
HF = CDX1-1425 PART No T5344
HORN = H1-9040P PART No T5359

					GENERAL TOLERANCE:	MATERIAL :	DRAWN	J.MOTT	TITLE	
					X.XX ±		DATE	10/09/03		
					X.X ± 2	FINISH:	CHECKED	PC	SCALE	
					X ±	SIMILAR TO:	APPROVED	IW		
A	I-9930	10/09/03	ISSUED		ANGLES ± °	GP ACOUSTICS (UK) LTD. FOXHALL ROAD, IPSWICH, SUFFOLK, IP3 8JP, ENGLAND. TEL: +44 (0) 1473 322222 FAX: +44 (0) 1473 729662 WEB SITE: www.celestion.com	AT A3 1:8		DRAWN TO BS8888	SHEET 1 OF 2
ISSUE	CHANGE NUMBER	DATE	REVISION DETAILS	ZONE	METRIC THREADS TO BS3643 FIT 6g TO 6H					DRG. No. GA880

UNLESS OTHERWISE STATED: DIMENSIONS IN MILLIMETRES; REMOVE BURRS AND SHARP EDGES; ALL CASTINGS AND MOULDINGS TO BE FREE FROM SINKS AND BLEMISHES. DO NOT SCALE DRAWING

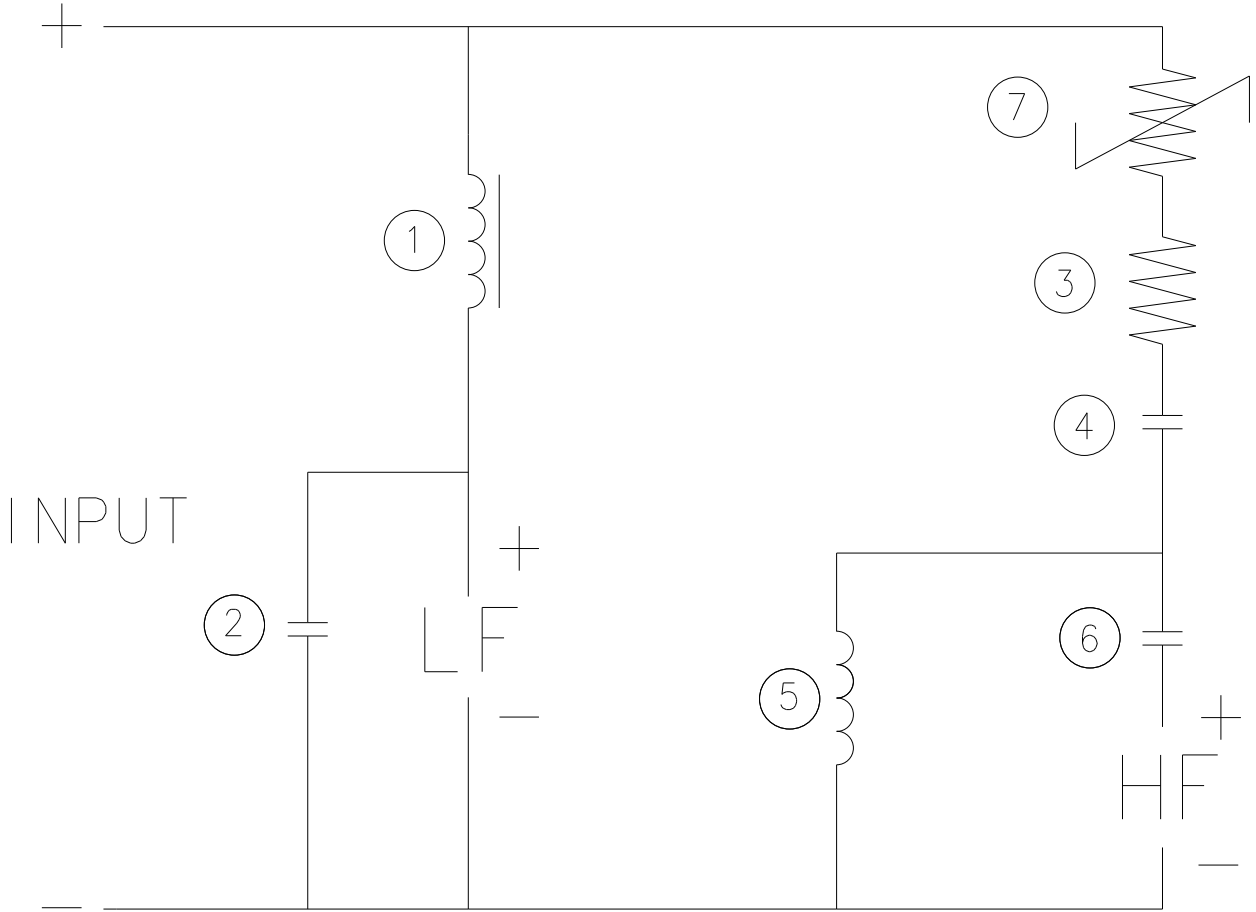	1	2	3	4	5	6	7	8
A	COMPONENTS: 1. INDUCTOR:- INDUCTANCE - 1.6mH±5% DC RESISTANCE - <0.3Ω 2. CAPACITOR:- POLYPROPYLENE/POLYESTER CAPACITANCE - 10μF±5% VOLTAGE RATING - >100V 3. RESISTOR:- CERAMIC WIRE WOUND RESISTANCE - 10Ω±5% POWER RATING - 25W 4. CAPACITOR:- POLYPROPYLENE/POLYESTER CAPACITANCE - 3μF±5% VOLTAGE RATING - 250V 5. INDUCTOR:- INDUCTANCE - 0.16mH±5% DC RESISTANCE - <0.5Ω 6. CAPACITOR:- POLYPROPYLENE/POLYESTER CAPACITANCE - 8μF±5% VOLTAGE RATING - >100V 7. POLYSWITCH (OPTIONAL):- RAYCHEM RXE110, 60V, 40A MAX, 1.10A HOLD, 2.20A TRIP				CIRCUIT DIAGRAM 			
B								
C								
D								
E								
F								

					GENERAL TOLERANCE:	MATERIAL:	DRAWN	J.MOTT	TITLE						
					X.XX ±		DATE	10/09/03							
					X.X ±	FINISH:	CHECKED		SCALE						
					X ±	SIMILAR TO:	APPROVED								
A	SEE SHEET ONE				ANGLES ± °	CELESTION GP ACOUSTICS (UK) LTD. FOXHALL ROAD, IPSWICH, SUFFOLK, IP3 8JP, ENGLAND. TEL: +44 (0) 1473 322222 FAX: +44 (0) 1473 729662 WEB SITE: www.celestion.com	AT A3 1:1			SHEET 2 OF 2					
ISSUE	CHANGE NUMBER	DATE	REVISION DETAILS	ZONE	METRIC THREADS TO BS3643 FIT 6g TO 6H						DRAWN TO BS8888 				
					15 " KIT										
					DRG. No. GA880										