

POLYPROPYLENE FILM CAPACITOR

 Type **APS**

Features

- Suitable for snubber circuits, small watts resonant circuits.
- Protected against moisture and solvent through our original epoxy resin vacuum impregnation.
- Temperature characteristic of capacitance is negative.
- Tangent of loss angle is very low, with an excellent long stability.

Specifications

Temp range	-40 to +85°C
Rated Voltage	100V.d.c., 250V.d.c., 400V.d.c
Capacitance	0.00010 to 0.22μF (E-24)
Cap. tolerance	±1%(F), ±2%(G), ±5%(J), ±10%(K)
Tangent of angle	C ≤ 0.10μF 0.0010 or less C ≥ 0.11μF 0.0012 or less (at 1kHz)
Insulation resistance	30,000MΩ or more
Endurance	85°C W.V. × 140%, 1000hr ΔC/C ±3% within tanδ C ≤ 0.10μF 0.0011 or less IR 15,000MΩ or more C ≥ 0.11μF 0.0013 or less
Damp heat	40°C 90 to 95%RH W.V. 1000hr ΔC/C ±3% within tanδ C ≤ 0.10μF 0.0012 or less IR 9,000MΩ or more C ≥ 0.11μF 0.0014 or less

Style	Straight lead type	
Cap range	102 to 224	

Style	Single formed lead type		
Cap range	123 to 124	134 to 224	101 to 113

For a pitch space(F) of the taping specification, refer to "TAPING DIMENSIONS"

Caution

- APS is sensitive for heating due to its construction and film material.
Refer to instructions for soldering handling.

- Specifications of products, materials and other contents stated in the catalog are subject to change without notice.
- When using our capacitors, please consider the application contact Nissei for the any additional technical specifications relating to the limits of our performance characteristics.

POLYPROPYLENE FILM CAPACITOR

 Type **APS**

Dimensions(mm)

Capacitors Code	Cap(μF)	APS 100V.dc						APS 250V.dc						APS 400V.dc					
		W	H	T	P	F	φd	W	H	T	P	F	φd	W	H	T	P	F	φd
101	0.00010	6.0	9.0	4.0	3.5	5.0	0.5	6.0	9.0	4.0	3.5	5.0	0.5						
121	0.00012	6.0	9.0	4.0	3.5	5.0	0.5	6.0	9.0	4.0	3.5	5.0	0.5						
151	0.00015	6.0	9.0	4.0	3.5	5.0	0.5	6.0	9.0	4.0	3.5	5.0	0.5						
181	0.00018	6.0	9.0	4.0	3.5	5.0	0.5	6.0	9.0	4.0	3.5	5.0	0.5						
221	0.00022	6.0	8.5	3.5	3.5	5.0	0.5	6.0	8.5	3.5	3.5	5.0	0.5						
271	0.00027	6.0	8.5	3.5	3.5	5.0	0.5	6.0	8.5	3.5	3.5	5.0	0.5						
331	0.00033	6.0	8.5	3.5	3.5	5.0	0.5	6.0	8.5	3.5	3.5	5.0	0.5						
391	0.00039	6.0	8.5	3.5	3.5	5.0	0.5	6.0	8.5	3.5	3.5	5.0	0.5						
471	0.00047	6.0	8.5	3.5	3.5	5.0	0.5	6.0	8.5	3.5	3.5	5.0	0.5						
561	0.00056	6.0	8.5	3.5	3.5	5.0	0.5	6.0	8.5	3.5	3.5	5.0	0.5						
681	0.00068	6.0	8.5	3.5	3.5	5.0	0.5	6.0	8.5	3.5	3.5	5.0	0.5						
821	0.00082	6.0	8.5	3.5	3.5	5.0	0.5	6.0	8.5	3.5	3.5	5.0	0.5						
102	0.0010	6.0	8.5	3.5	3.5	5.0	0.5	6.0	8.5	3.5	3.5	5.0	0.5	7.2	10.0	4.5	5.0	5.0	0.5
122	0.0012	6.0	8.5	3.5	3.5	5.0	0.5	6.5	8.5	4.0	3.5	5.0	0.5	7.5	10.0	4.5	5.0	5.0	0.5
152	0.0015	6.0	8.5	3.5	3.5	5.0	0.5	7.0	8.5	4.0	3.5	5.0	0.5	7.5	10.0	4.5	5.0	5.0	0.5
182	0.0018	6.0	8.5	3.5	3.5	5.0	0.5	6.0	8.5	4.0	3.5	5.0	0.5	7.4	10.5	4.5	5.0	5.0	0.5
222	0.0022	6.0	8.5	3.5	3.5	5.0	0.5	6.3	8.5	4.0	3.5	5.0	0.5	7.4	10.5	4.5	5.0	5.0	0.5
272	0.0027	6.0	8.5	3.5	3.5	5.0	0.5	6.5	8.5	4.0	3.5	5.0	0.5	7.5	13.0	4.5	5.0	5.0	0.5
332	0.0033	6.0	8.5	3.5	3.5	5.0	0.5	7.0	8.5	4.0	3.5	5.0	0.5	7.5	13.0	4.5	5.0	5.0	0.5
392	0.0039	6.0	8.5	3.5	3.5	5.0	0.5	7.0	10.0	4.0	3.5	5.0	0.5	8.0	13.0	5.0	5.0	5.0	0.5
472	0.0047	6.0	8.5	3.5	3.5	5.0	0.5	7.5	10.5	4.0	3.5	5.0	0.5	8.0	13.0	5.0	5.0	5.0	0.5
562	0.0056	6.0	8.5	3.5	3.5	5.0	0.5	8.0	11.0	4.5	3.5	5.0	0.5	8.2	13.5	5.0	5.0	5.0	0.5
682	0.0068	6.0	8.5	3.5	3.5	5.0	0.5	8.0	11.0	5.0	3.5	5.0	0.5	8.2	13.5	5.0	5.0	5.0	0.5
822	0.0082	7.0	9.5	4.0	3.5	5.0	0.5	8.0	11.0	5.5	3.5	5.0	0.5	9.0	13.5	5.0	5.0	5.0	0.5
103	0.010	7.0	9.5	4.0	3.5	5.0	0.5	8.5	11.0	5.5	3.5	5.0	0.5	9.5	13.5	5.0	5.0	5.0	0.5
123	0.012	7.5	10.5	4.0	5.0	5.0	0.5												
153	0.015	7.5	10.5	4.5	5.0	5.0	0.5												
183	0.018	8.0	11.0	5.0	5.0	5.0	0.5												
223	0.022	8.0	11.0	5.0	5.0	5.0	0.5												
273	0.027	9.0	12.0	5.5	5.0	5.0	0.5												
333	0.033	9.0	12.0	5.5	5.0	5.0	0.5												
393	0.039	10.0	13.0	6.0	7.5	5.0/7.5	0.5												
473	0.047	10.0	13.0	6.0	7.5	5.0/7.5	0.5												
563	0.056	11.0	14.0	6.0	7.5	5.0/7.5	0.5												
683	0.068	11.0	14.0	6.5	7.5	5.0/7.5	0.5												
823	0.082	11.5	14.0	7.0	7.5	5.0/7.5	0.5												
104	0.10	12.0	14.0	7.5	7.5	5.0/7.5	0.5												
124	0.12	13.0	14.0	8.0	7.5	5.0/7.5	0.5												
154	0.15	14.0	19.5	7.5	10.0	5.0/7.5	0.6												
184	0.18	15.0	19.5	7.5	10.0	5.0/7.5	0.6												
224	0.22	15.0	19.5	8.0	10.0	5.0/7.5	0.6												




- Specifications of products, materials and other contents stated in the catalog are subject to change without notice.
- When using our capacitors, please consider the application contact Nissei for the any additional technical specifications relating to the limits of our performance characteristics.

Standard quantity packed in a box

POLYPROPYLENE FILM CAPACITOR

 Type **APS**

Characteristics of permissible current to frequency

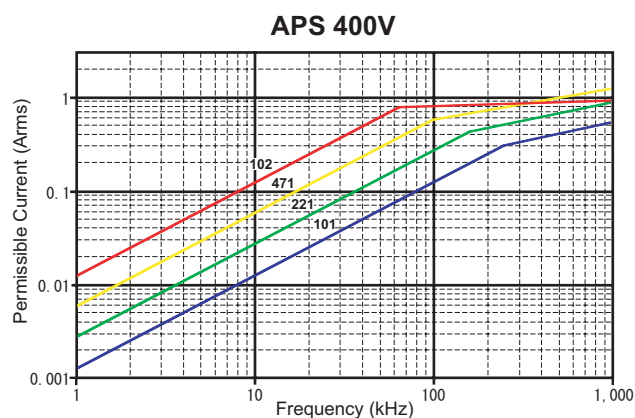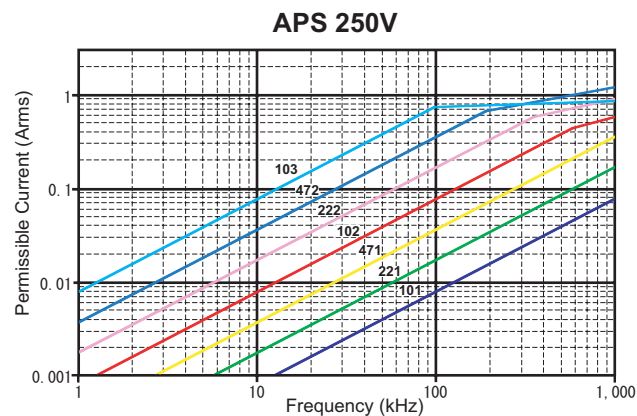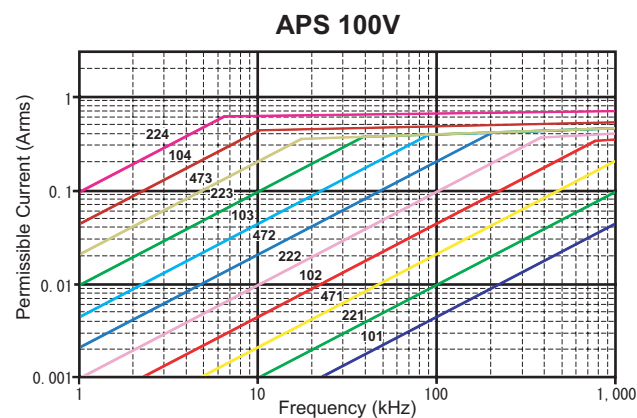

- Specifications of products, materials and other contents stated in the catalog are subject to change without notice.
- When using our capacitors, please consider the application contact Nissei for the any additional technical specifications relating to the limits of our performance characteristics.

Standard quantity packed in a box