



RS125-4

5" Reference Woofer 4 Ohm



Features

- Lightweight black anodized aluminum cone
- 4 ohm nominal impedance
- Attractive 6-hole cast frame
- Advanced low distortion motor design
- Solid aluminum phase plug
- Rubber surround

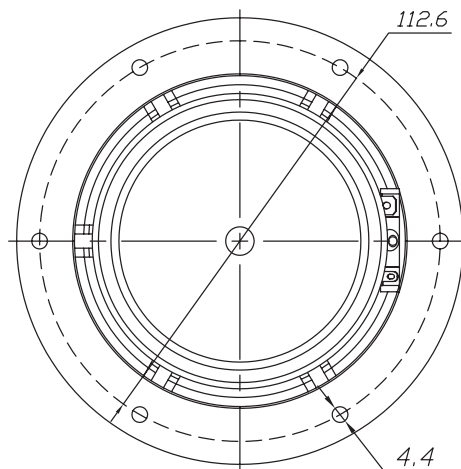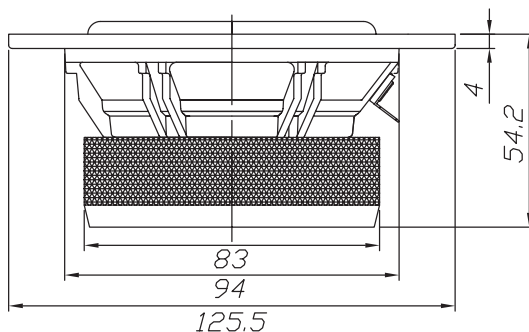


Note: All dimensions in mm.

Parameters


Impedance (Ω)	4
Re (Ω)	2.85
Le (mH) @ 1 kHz	0.28
Fs (Hz)	65
Qms	2.04
Qes	0.45
Qts	0.37
Mms (g)	5.73
Cms (mm/N)	1.35
Sd (cm ²)	52.8
Vd (cm ³)	21.1
BL (Tm)	3.63
VAS (liters)	5.29
XMAX (mm)	4
VC Diameter (mm)	25
SPL (dB 2.83V/1m)	89.1
RMS Power Handling (W)	30
Usable Frequency Range (Hz)	65-5,400

Frequency Response

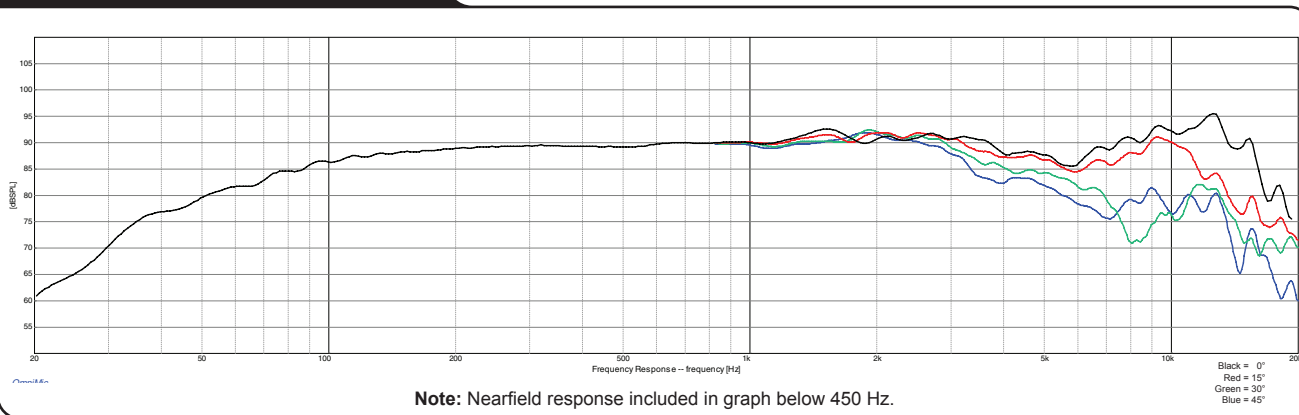

daytonaudio.com

Impedance/Phase

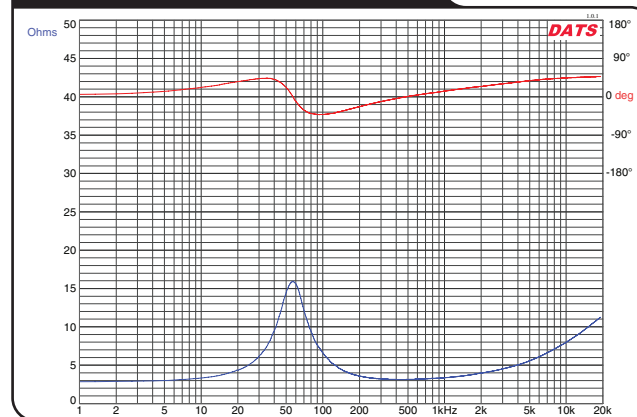

© Dayton Audio Last Revised: 9/1/2014