



Product Specification

General Specifications

Type	Compression Driver			
Throat Diameter	1	inch	25.4	mm
Diaphragm Diameter	2	inch	51.1	mm
Nominal Impedance	8	Ω		
Voice Coil DC Resistance	6.5	Ω		
Power Handling Capacity	40	W(AES)		
Frequency Bandwidth (± 3 dB)	1200-18000	Hz		
Sensitivity @ 1W 1M	106	dB	load with PH-3220	
Recommended Crossover	1.5k	Hz	12dB/Octave Slope	
Mounting Type	Bolt on			


Code Number	F01020102431PAA		
Model Name	PA-D52 8OHM		
Description	Driver Tweeter		
Customer Name	PAA		
Engineer	ART	Date	3/2/2015
Approved		Date	

Physical Information

Magnet	Type	Ferrite Y30		
	Size (mm)	134	56	20
	Volume	41.0 oz.		
Cover	Material	Plastic		
	Color	Black		
Voice Coil	Wire	SV-W		
	Former	KSV		
Diaphragm	Material	Titanium		
	Color	Silver		
Packing Quantity		10 PCS		
Safe & Proper size	(mm)	395	310	185
	(inch)	15.6	12.2	7.3
	cu.ft	0.80		

Dimensions


Overall Diameter	134	mm	5.3	inch
Mouting Hole Diameter	3-M6X1 PCD 57.0 MM			
Mouting Hole Diameter	2-M6X1 PCD 76.2 MM			

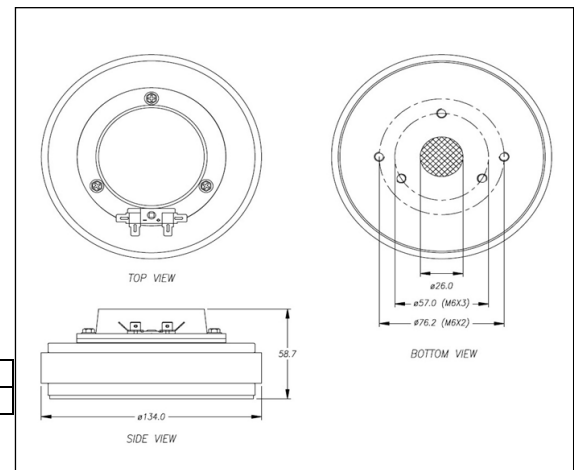

Power Test

Apply Voltage		V	Duration		hour
Low Pass		Hz	Hi Pass		Hz

Frequency Response

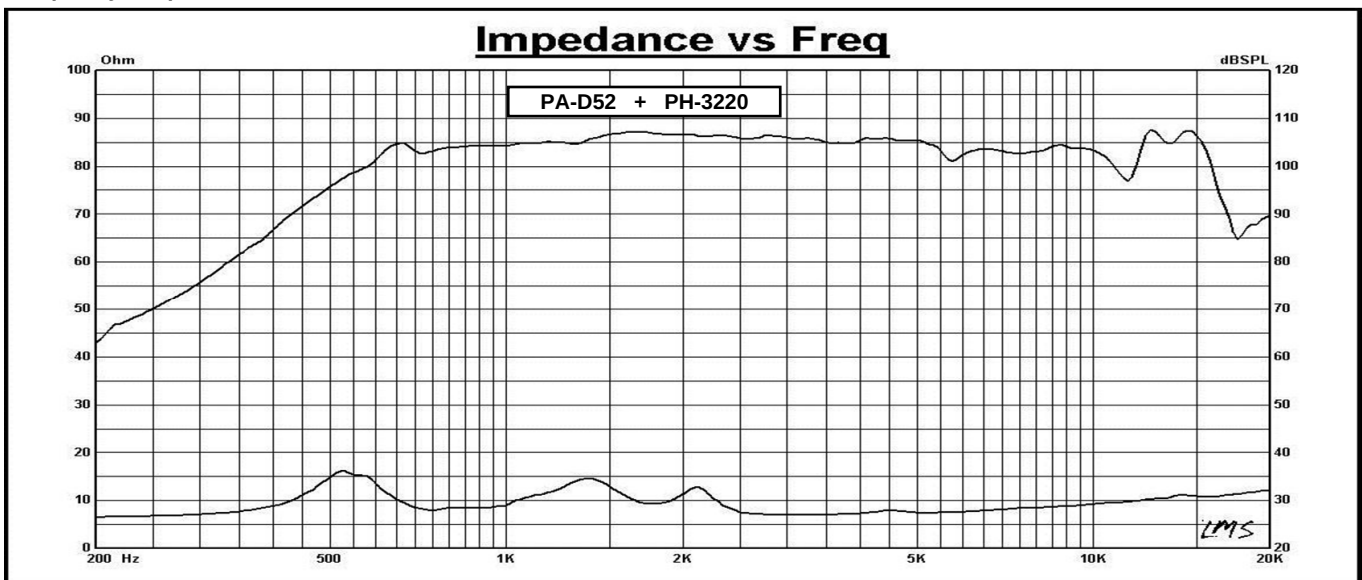

Revision	A
----------	---