

RS225S-8

8" Reference Shielded Woofer 8 Ohm





Features

- Lightweight black anodized aluminum cone
- Fully shielded magnetic structure
- Attractive 6-hole cast frame
- Advanced low distortion motor design
- Solid aluminum phase plug
- Rubber surround


Parameters

Impedance (Ω)	8
Re (Ω)	6.4
Le (mH) @ 1 kHz	0.94
Fs (Hz)	26.9
Qms	1.42
Qes	0.53
Qts	0.38
Mms (g)	30.52
Cms (mm/N)	1.15
Sd (cm ²)	216.4
Vd (cm ³)	151.5
BL (Tm)	8.03
VAS (liters)	75.3
XMAX (mm)	7
VC Diameter (mm)	38
SPL (dB@1W/1m)	88.1
RMS Power Handling (w)	80
Usable Frequency Range (Hz)	27 - 2,000

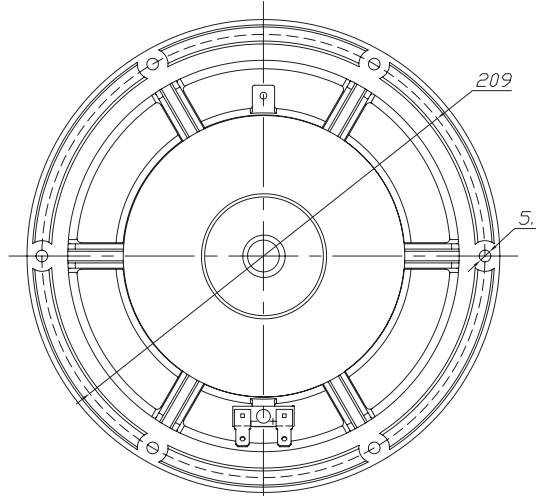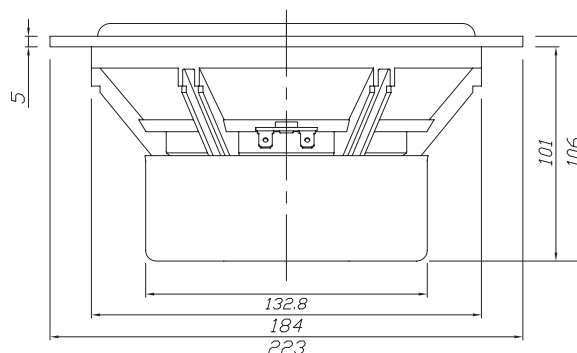

Note: All dimensions in mm.

Frequency Response

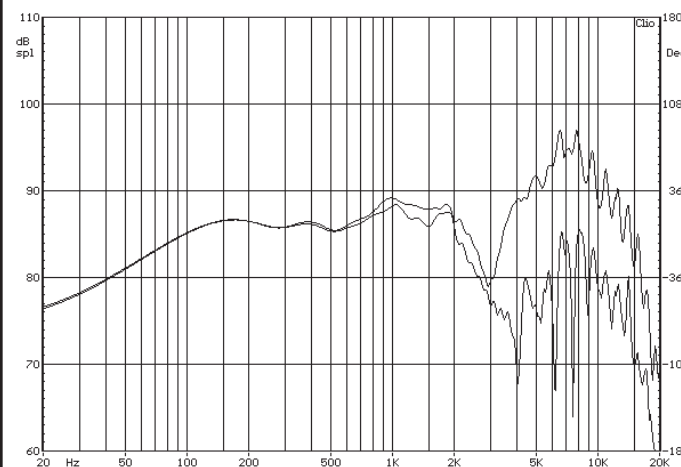

Note: Due to testing limitations, response below 200 Hz is not an actual representation.

Impedance/Phase

