
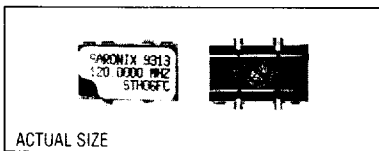


HCMOS, TTL, Tri-State, SMD

Technical Data

STA / STH / STT Series, Type F




Description

A crystal controlled, low current oscillator to drive HCMOS and NMOS microprocessors. This HCMOS device is capable of driving both HCMOS and TTL loads at high frequencies. The tri-state function enables the output to go high impedance. The surface mountable J-leaded plastic package is ideal for automated assembly.

Applications & Features

- Ideally suited for high speed graphics, CISC and RISC processors, and custom ASIC's
- Compact Surface Mountable package
- Matches EIA standard SO-J-20 footprint
- High frequency up to 135 MHz
- AC MOS, HCMOS and TTL compatible
- Tri-state output
- Output is short-circuit protected

Output Waveform

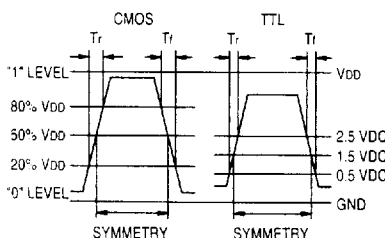

Frequency Range:	70 MHz to 135 MHz
Frequency Stability:	± 50 , ± 100 or ± 500 ppm over all conditions: calibration tolerance, operating temperature, input voltage change, load change, aging, shock and vibration.
Temperature Range:	
Operating:	0°C to +70°C
Storage:	-55°C to +125°C
Supply Voltage:	
Operating:	+5 VDC $\pm 10\%$
Absolute Maximum:	+7 VDC
Supply Current:	
70 MHz to 80 MHz:	30mA typical, 35mA max @ 25°C 40mA max over operating temperature range
Above 80 MHz:	45mA typical, 55mA max @ 25°C 65mA max over temperature range
Output Drive:	
<u>ACMOS</u>	
Symmetry:	@ 0.5 VDD, see Part Numbering Guide on Page 2
Rise & Fall Times:	20% to 80% VDD, see Part Numbering Guide
Logic 0:	10% VDD max
Logic 1:	90% VDD min
Output Load:	50 pF in parallel with 500 Ω , max
<u>TTL</u>	
Symmetry:	@ 1.5V level, see Part Numbering Guide on Page 2
Rise & Fall Times:	0.5 to 2.5V, see Part Numbering Guide
Logic 0:	0.5V max
Logic 1:	2.5V min
Sink & Source Current:	50mA max
Mechanical:	
Shock:	MIL-STD-883, Method 2002, Condition B
Solderability:	MIL-STD-883, Method 2003
Terminal Strength:	MIL-STD-202, Method 211, Conditions A and C
Vibration:	MIL-STD-883, Method 2007, Condition A
Solvent Resistance:	MIL-STD-202, Method 215
Resistance to Soldering Heat:	MIL-STD-202, Method 210, Condition B
Environmental:	
Thermal Shock:	MIL-STD-883, Method 1011, Condition A
Moisture Resistance:	MIL-STD-883, Method 1004

Technical Data


STA / STH / STT Series, Type F

Tri-State Logic Table

Pin 1 Input	Pin 3 Output
Logic "1" or NC	Oscillation
Logic "0" or GND	High Impedance

Required Input Levels on Pin 1:
Logic "1" = 3.0V min
Logic "0" = 0.5V max


Package

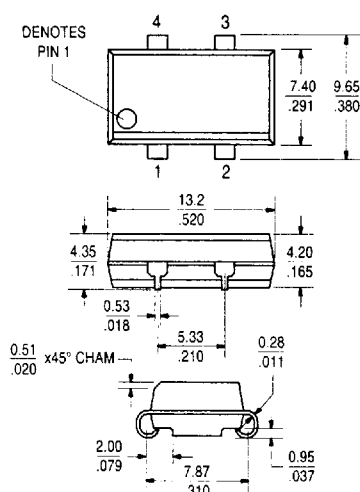


Pin Function:

Pin 1: Tri-State Control Pin 3: Output
Pin 2: GND Pin 4: +5 VDC

Standard Marking Format

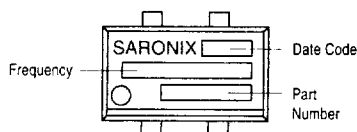


Recommended Land Pattern

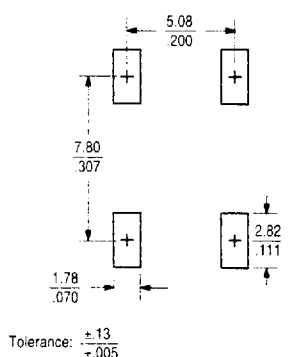

* Good external high frequency power supply decoupling required.

Scale: None (Dimensions in mm / inches)

Part Numbering Guide

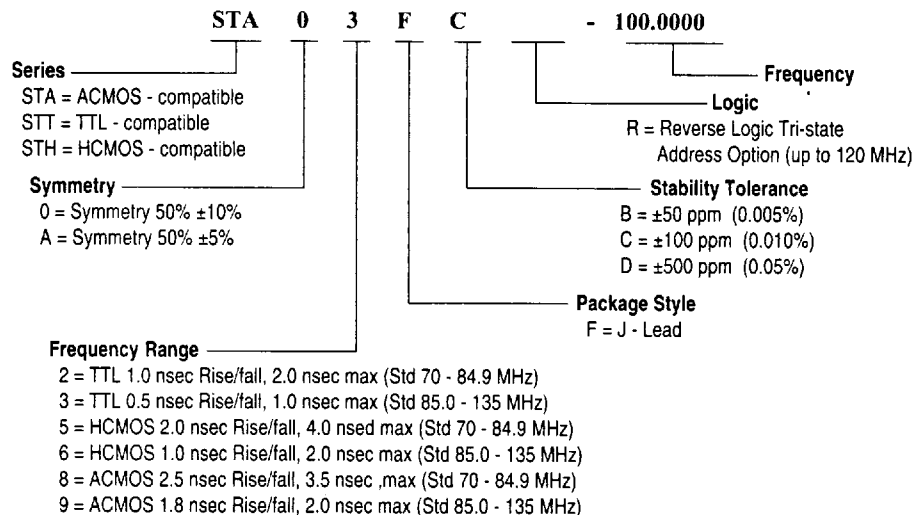

Example P/N: STA03FC - 80.0000

Test Circuits

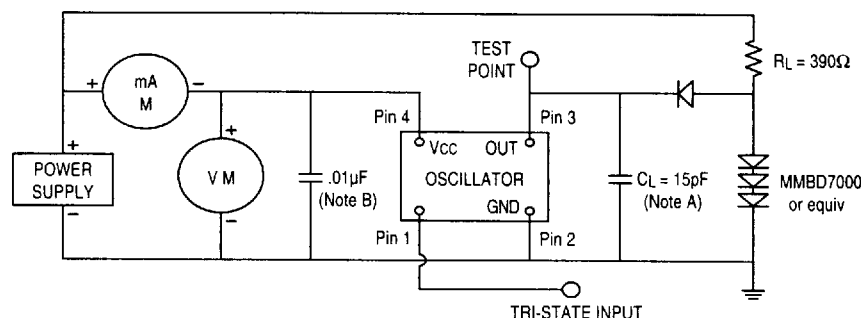


FIGURE 1 - TTL TEST CIRCUIT

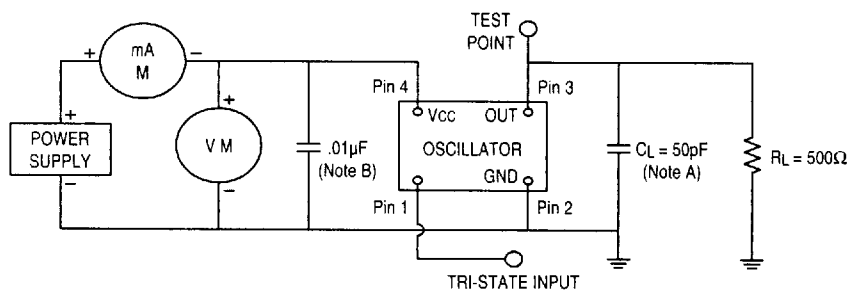


FIGURE 2 - HCMOS TEST CIRCUIT

All specifications are subject to change without notice.

DS-102 REV A February 1994

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.