

**ELNA**



Electronic Components  
High Quality

# CAPACITORS

CONDUCTIVE POLYMER HYBRID ALUMINUM ELECTROLYTIC CAPACITORS  
ALUMINUM ELECTROLYTIC CAPACITORS WITH CONDUCTIVE POLYMER SOLID ELECTROLYTE  
ALUMINUM ELECTROLYTIC CAPACITORS  
ELECTRIC DOUBLE LAYER CAPACITORS "DYNACAP™"

**ELNA** CO., LTD.

CAT.No.2022/2023E

Please read this notice before using the ELNA products.

## REMINDERS

### Product Information in this Catalog

Product information in this catalog is as of December 2021. All of the contents specified herein and production status of the products listed in this catalog are subject to change without notice due to technical improvement of our products, etc. Therefore, please check for the latest information carefully before practical application or use of our products.

Please note that ELNA shall not be in any way responsible for any damages and defects in products or equipment incorporating our products, which are caused under the conditions other than those specified in this catalog or individual product specification sheets.

### Approval of Product Specifications

Please contact ELNA for further details of product specifications as the individual product specification sheets are available. When using our products, please be sure to approve our product specifications or make a written agreement on the product specification with ELNA in advance.

### Pre-Evaluation in the Actual Equipment and Conditions

Please conduct validation and verification of our products in actual conditions of mounting and operating environment before using our products.

### Limited Application

#### 1. Equipment Intended for Use

The products listed in this catalog are intended for general-purpose and standard use in general electronic equipment (e.g., AV equipment, OA equipment, home electric appliances, office equipment, information and communication equipment including, without limitation, mobile phone, and PC) and other equipment specified in this catalog or the individual product specification sheets.

ELNA has the line-up of the products intended for use in automotive electronic equipment, telecommunications infrastructure and industrial equipment, or medical devices classified as GHTF Classes A to C (Japan Classes I to III). Therefore, when using our products for these equipment, please check available applications specified in this catalog or the individual product specification sheets and use the corresponding products.

#### 2. Equipment Requiring Inquiry

Please be sure to contact ELNA for further information before using the products listed in this catalog for the following equipment (excluding intended equipment as specified in this catalog or the individual product specification sheets) which may cause loss of human life, bodily injury, serious property damage and/or serious public impact due to a failure or defect of the products and/or malfunction attributed thereto.

- (1) Transportation equipment (automotive powertrain control system, train control system, and ship control system, etc.)
- (2) Traffic signal equipment
- (3) Disaster prevention equipment, crime prevention equipment
- (4) Medical devices classified as GHTF Class C (Japan Class III)
- (5) Highly public information network equipment, data-processing equipment (telephone exchange, and base station, etc.)
- (6) Any other equipment requiring high levels of quality and/or reliability equal to the equipment listed above

#### 3. Equipment Prohibited for Use

Please do not incorporate our products into the following equipment requiring extremely high levels of safety and/or reliability.

- (1) Aerospace equipment (artificial satellite, rocket, etc.)
- (2) Aviation equipment \*
- (3) Medical devices classified as GHTF Class D (Japan Class IV), implantable medical devices \*\*

- (4) Power generation control equipment (nuclear power, hydroelectric power, thermal power plant control system, etc.)
- (5) Undersea equipment (submarine repeating equipment, underwater work equipment, etc.)
- (6) Military equipment
- (7) Any other equipment requiring extremely high levels of safety and/or reliability equal to the equipment listed above

\*Notes:

1. There is a possibility that our products can be used only for aviation equipment that does not directly affect the safe operation of aircraft (e.g., in-flight entertainment, cabin light, electric seat, cooking equipment) if such use meets requirements specified separately by ELNA. Please be sure to contact ELNA for further information before using our products for such aviation equipment.
2. Implantable medical devices contain not only internal unit which is implanted in a body, but also external unit which is connected to the internal unit.

#### 4. Limitation of Liability

Please note that unless you obtain prior written consent of ELNA, ELNA shall not be in any way responsible for any damages incurred by you or third parties arising from use of the products listed in this catalog for any equipment that is not intended for use by ELNA, or any equipment requiring inquiry to ELNA or prohibited for use by ELNA as described above.

#### Safety Design

When using our products for high safety and/or reliability-required equipment or circuits, please fully perform safety and/or reliability evaluation. In addition, please install (i) systems equipped with a protection circuit and a protection device and/or (ii) systems equipped with a redundant circuit or other system to prevent an unsafe status in the event of a single fault for a failsafe design to ensure safety.

#### Intellectual Property Rights

Information contained in this catalog is intended to convey examples of typical performances and/or applications of our products and is not intended to make any warranty with respect to the intellectual property rights or any other related rights of ELNA or any third parties nor grant any license under such rights.

#### Limited Warranty

Please note that the scope of warranty for our products is limited to the delivered our products themselves and ELNA shall not be in any way responsible for any damages resulting from a failure or defect in our products. Notwithstanding the foregoing, if there is a written agreement (e.g., supply and purchase agreement, quality assurance agreement) signed by ELNA and your company, ELNA will warrant our products in accordance with such agreement.

#### ELNA's Official Sales Channel

The contents of this catalog are applicable to our products which are purchased from our sales offices or authorized distributors (hereinafter "ELNA's official sales channel"). Please note that the contents of this catalog are not applicable to our products purchased from any seller other than ELNA's official sales channel.

#### Caution for Export

Some of our products listed in this catalog may require specific procedures for export according to "U.S. Export Administration Regulations", "Foreign Exchange and Foreign Trade Control Law" of Japan, and other applicable regulations. Should you have any questions on this matter, please contact our sales staff.

■ **“GREEN CAP™”**

“GREEN CAP”, ELNA considers the global environment and it is a product that doesn't use the hazardous substance and “Lead Free” in the plating of terminals and outer Sleeves.  
 The product in this catalog is 'GREEN CAP'.

The hazardous substance is  
 Cadmium and its compounds, Lead and its compounds  
 Hexavalent chromium compounds, Mercury and its compounds  
 PBB, PBDE : Specified bromine-based flame retardants  
 DEHP : Di(2-ethylhexyl)phthalate, BBP : Bis(butylbenzyl) phthalate  
 DBP : Dibutyl phthalate, DIBP : Diisobutyl phthalate

■ **Regarding to various environmental Regulations**

It suits with the following EU regulations.

- End-of-Life Vehicle Directive
- Restriction of the Use of Certain Hazardous Substances In Electrical and Electronic Equipment.
- Waste Electrical and Electronic Equipment, etc.

For details, please check our website. (<https://www.ena.co.jp/en/sustainability/environment/regulation/>)

If you need “Halogen-Free” products, please consult with us.

**Terminal area plating material and sleeve material**

● **Aluminum (Polymer hybrid,Conductive Polymer Solid Electrolyte) electrolytic capacitors**

Category		Terminal area plating	Plating thickness	Sleeve
SMD (Chip type)	φ 3 to 6.3	Sn-Bi	12μm	Sleeve less
	φ 8,10	Sn-Bi	12μm	Sleeve less
	φ 12.5	Sn 100%	12μm	Sleeve less
	φ 16 to 18	Sn 100%	12μm	Sleeve less
	Supplementary terminal of RT* type	Sn 100%	12μm	Sleeve less
Lead terminal		Sn 100%	12μm	PET (or Sleeve less)

● **Electric double layer capacitors**

Category		Terminal area plating	Plating thickness	Sleeve	
Coin cell	SMD	Single cell	Sn 100% or Sn+Cu	5μm	Sleeve less
		Piled cell	Sn 100%	5μm	PET
	Lead type	Sn 100%	5μm	PET	
Large capacitance	Lead terminal	Sn 100%	12μm	PET	
	Snap-in terminal	Sn 100%	12μm	PET	

Note : Sn : Tin Bi : Bismuth Cu : Copper

Please inquire when hoping excluding the above-mentioned terminal plating and sleeve.

NOTE : Design, Specifications are subject to change without notice.  
 It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

■ **About the Sn whisker**

1. Sn whisker-generating mechanism on the lead wire

On the surface of the lead wire, Sn and aluminum will get mixed instead of getting dissolved.

The surface condition is complex, aluminum will expand due to the heat and humid causing the oxidation and hydration. This reaction will cause the inner stress and influence the development of the whisker.

2. Generation control of the Sn whisker

In the past, Sn whisker was reduced by adding a lead(Pb). Aluminum electrolytic capacitor was also using the Sn-plate with Pb on the lead wire.

But due to environmental regulation such as the “ELV” and “RoHS”, Pb was strictly prohibited since 2000.

Lead wire not containing the Pb was used, which caused the Sn whisker problem to happen again.

Since Sn whisker is influenced by the mixture of aluminum, method of reducing the aluminum on the welding surface was to clean the lead terminal using the alkali.

However since the welding area of the large case size is larger compared to the small ones, whisker will generate even if it is cleaned by alkali. This whisker will scatter outside of the capacitor and potentially cause the short-circuit. Countermeasure of keeping the whisker inside the capacitor is being discussed.

3. Prevention of scattering of Sn whisker


In the past Sn-plate with Pb was used and recently plate with Bi is being introduced to prevent the whisker from generating. However the whisker will still generate under the temperature and moisture condition.

Therefore, the current method of preventing the whisker will not completely prevent the whisker from generating.

In our company, we are developing and supplying products with design of preventing the whisker from scattering outside the capacitor.

This design corresponds to series such as the RJD and RJE for 105°C use, RJK, RKD and RPK for 125°C use.

If it is required for the other series, please feel free to make an inquiry.

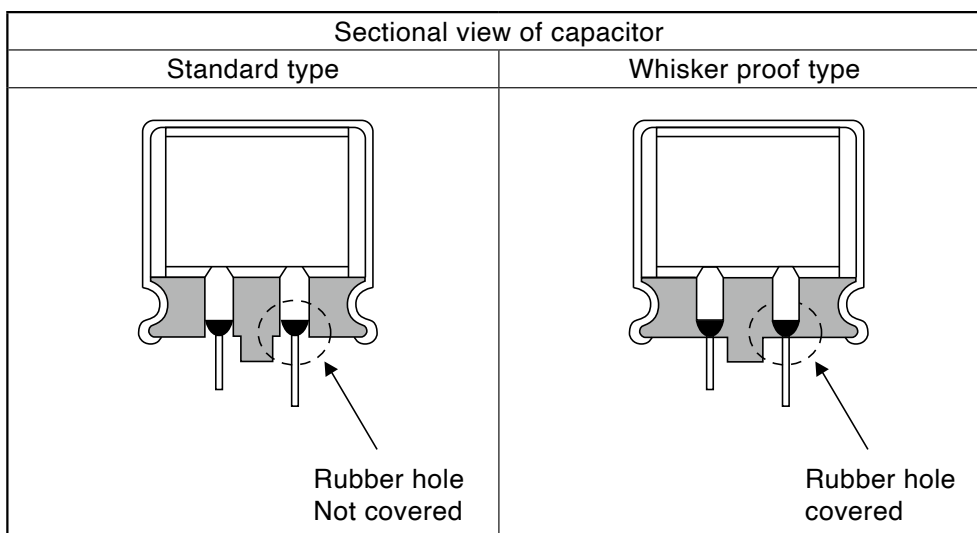

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

**Ordering Information**

Please order by the multiples of the minimum order quantity (MOQ).

**Aluminum Electrolytic Capacitors**

Classification	Case Size φD×L (mm)	Quantity (PCS.)							
		Long lead		Forming lead		Taping (04 Type)	Taping (Chip Type)		
		(Q'ty/Bag)	MOQ/Box	(Q'ty/Bag)	MOQ/Box	MOQ/Box	MOQ/Reel	(Q'ty/Box)	
Aluminum Electrolytic Capacitors With Conductive Polymer Solid Electrolyte Conductive Polymer Hybrid Aluminum Electrolytic Capacitors	Chip Type	φ5 to φ6.3	—	—	—	—	—	1,000	5,000
		φ8,φ10×8.7 to 10	—	—	—	—	—	500	2,000
		φ10×12.5	—	—	—	—	—	400	1,600
		φ12.5×13.5	—	—	—	—	—	200	1,000
		04 Type	φ8	200	2,000	200	2,000	1,000	—
φ10	200		1,000	200	1,000	500	—	—	
Chip Type	φ4	—	—	—	—	—	2,000	10,000	
	φ5 to φ6.3×4.5 to 7.7,φ8×6.5	—	—	—	—	—	1,000	5,000	
	φ8 to φ10×10 to 10.5	—	—	—	—	—	500	2,000	
	φ12.5×13.5	—	—	—	—	—	200	1,000	
	φ16×16.5,φ18×16.5	—	—	—	—	—	125	250	
φ16×21.5,φ18×21.5	—	—	—	—	—	75	150		
04 Type	φ4 to φ5×5,φ4×7	200	2,000	200	5,000	2,000	—	—	
	φ5×7	200	2,000	200	4,000	2,000	—	—	
	φ6.3×5,φ6.3×7	200	2,000	200	2,000	2,000	—	—	
	φ8×5 to 7	200	2,000	200	2,000	1,000	—	—	
	φ5 to φ6.3×11,11.5	200	2,000	200	2,000	2,000	—	—	
	φ8×11.5,12	200	2,000	200	2,000	1,000	—	—	
	φ8×15	200	1,000	200	1,000	1,000	—	—	
	φ8×20	200	1,000	200	1,000	1,000	—	—	
	φ10×12.5	200	1,000	200	1,000	500	—	—	
	φ10×16	200	1,000	200	1,000	500	—	—	
	φ10×20	200	1,000	200	1,000	500	—	—	
	φ10×25 to 30	200	1,000	100 (200)	500 (1000)	500	—	—	
	φ12.5×15 to 20	100	1,000	100	1000 (500)	500	—	—	
	φ12.5×25	100	500 (1000)	100	1000 (500)	500	—	—	
	φ12.5×30	100	500	200 (100)	2000 (500)	500	—	—	
	φ12.5×35	100	500	200 (100)	2000 (500)	500	—	—	
	φ12.5×40	100	500 (100)	200 (100)	2000 (500)	—	—	—	
	φ16×16 to 25	100	500	100	1000 (100)	—	—	—	
	φ16×31.5 to 35.5	50	200 (400)	100	1000 (100)	—	—	—	
	φ16×40	50 (100)	100	100	800 (100)	—	—	—	
	φ18×16	50	100	100	1000 (100)	—	—	—	
	φ18×20	50 (100)	100 (500)	100	1000 (100)	—	—	—	
	φ18×25	50 (100)	100 (400)	100	1000 (100)	—	—	—	
φ18×31.5 to 35.5	50	100	100	1000 (100)	—	—	—		
φ18×40 to 50	50	250 (100)	100	800 (100)	—	—	—		
φ20×40 to 50	50	100	100	600 (100)	—	—	—		
φ22×40 to 50	50	100 (200)	100	400 (100)	—	—	—		

(Note) It may become the numerical value in ( ).

**Electric Double Layer Capacitors**

Type	Case size φD×L(mm)	Quantity (PCS.)						
		Long lead		Standard lead		Taping (04 Type)	Taping (Chip Type)	
		(Q'ty/Bag)	MOQ/Box	(Q'ty/Bag)	MOQ/Box	MOQ/Box	MOQ/Reel	(Q'ty/Box)
Coin	φ11.5	—	—	200	2,000	—	—	—
	φ19	—	—	100	500	—	—	—
	φ13.5	—	—	200	1,000	—	—	—
	φ21.5	—	—	100	500	—	—	—
	φ6.8	—	—	—	—	—	1,500 to 2,000*	6,000 to 8,000*
	φ12.5×8.5	—	—	—	—	—	300	1,500
φ12.5×10.5	—	—	—	—	—	250	1,250	
Type	Case size φD×L(mm)	Quantity (PCS.)						
		Long lead		Forming lead		Taping (04 Type)	Taping (Chip Type)	
		(Q'ty/Bag)	MOQ/Box	(Q'ty/Bag)	MOQ/Box	MOQ/Box	MOQ/Reel	(Q'ty/Box)
Cylindrical	φ6.3	200	2,000	200	2,000	2,000	—	—
	φ8×12	200	2,000	200	2,000	1,000	—	—
	φ8×15 to 22	200	1,000	200	1,000	1,000	—	—
	φ10×20 to 25	200	1,000	100	500	500	—	—
	φ10×30 to 35	200	1,000	100	500	500	—	—
	φ12.5×25	100	500	100	1,000	500	—	—
	φ12.5×35	100	500	200	2,000	—	—	—
	φ16×20 to 25	100	500	100	1,000	—	—	—
	φ16×31.5 to 35.5	50	200	100	1,000	—	—	—
	φ16×40	50	100	100	800	—	—	—
	φ18×35	50	100	100	1,000	—	—	—
	φ18×40	50	250	100	800	—	—	—
	φ25	—	50 or 100*	—	—	—	—	—
	φ35	—	50 or 100*	—	—	—	—	—
Packed	8.5×17×16	—	*					
	8.5×17×24							
	10.5×21×29							
	10.5×21×39							

\* Please inquire.

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

■ Type List for Aluminum Electrolytic Capacitors

★ : New series  
☆ : Upgrade

● Aluminum (Conductive Polymer, Hybrid) Electrolytic Capacitors

Category	Series	Application	Category Temp. Range (°C)		Life time Range (hours)		Rated Voltage Range (V.DC)		Rated Capacitance Range (μF)		Size range φD x L (mm)		Outside color	JIS Configurati	Note
			Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.			
Hybrid	HV1	Low ESR Hybrid Polymer Chip	-55	+105	10000		6.3	100	10	820	5×5.8	12.5×13.5	Silver	32	
	HT1	Low ESR Hybrid Polymer Chip, Vibration resistance	-55	+105	10000		6.3	100	10	820	6.3×5.8	12.5×13.5	Silver	32	☆
	HVK	Low ESR, 125°C, Hybrid Polymer Chip	-55	+125	4000	6000	6.3	100	10	820	5×5.8	12.5×13.5	Silver	32	
	HTK	Low ESR, 125°C, Hybrid Polymer Chip, Vibration resistance	-55	+125	4000	6000	6.3	100	10	820	6.3×5.8	12.5×13.5	Silver	32	☆
	HVX	Low ESR, 135°C, Hybrid Polymer Chip	-55	+135	2000	4000	16	63	10	560	6.3×5.8	10×12.5	Silver	32	☆
	HTX	Low ESR, 135°C, Hybrid Polymer Chip, Vibration resistance	-55	+135	2000	4000	16	63	10	560	6.3×5.8	10×12.5	Silver	32	☆
	HVQ	Low ESR, 150°C, Hybrid Polymer Chip	-55	+150	1000		16	63	33	470	8×10	10×10	Silver	32	★
	HTQ	Low ESR, 150°C, Hybrid Polymer Chip, Vibration resistance	-55	+150	1000		16	63	33	470	8×10	10×10	Silver	32	★
	BR1	Low ESR Hybrid Polymer, lead terminal type	-55	+105	10000		25	100	15	560	10×10	10×12.5	Silver	04	
	BRK	Low ESR, 125°C, Hybrid Polymer, lead terminal type	-55	+125	4000	6000	25	100	15	560	10×10	10×12.5	Silver	04	
Polymer	PVX	Ultra Low ESR Conductive Polymer Chip	-55	+105	2000		2.5	10	100	1200	5×5.7	6.3×5.7	Silver	32	
	PVM	Super Low ESR Conductive Polymer Chip	-55	+105	2000		2.5	16	33	1200	5×5.7	6.3×5.7	Silver	32	
	PVK	Super Low ESR, High Temp. Conductive Polymer Chip	-55	+125	1000		2.5	16	33	1000	6.3×5.7		Silver	32	

● Chip Type Aluminum Electrolytic Capacitors

Category	Series	Application	Category Temp. Range (°C)		Life time Range (hours)		Rated Voltage Range (V.DC)		Rated Capacitance Range (μF)		Size range φD x L (mm)		Outside color	JIS Configurati	Note
			Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.			
Standard	VV4	4.5mm L	-40	+85	2000		6.3	50	10	100	6.3×4.5		Silver	32	
	VV5	High CV	-40	+85	2000		4	100	1	2200	4×5.3	12.5×13.5	Silver	32	
	VVB	Non Polarized	-40	+85	2000		6.3	50	1	47	4×5.3	6.3×5.3	Silver	32	
High Reliability	VVE	105°C , 4.5mmL	-40	+105	1000		6.3	50	10	100	6.3×4.5		Silver	32	
	VVS	105°C , 5.5mm L	-55	+105	1000		6.3	50	1	1500	4×5.3	10×10.5	Silver	32	
	VVR	105°C, Long Life, High CV	-40	+105	2000		4	50	1	1500	4×5.3	10×10.5	Silver	32	
	VV9	105°C , Non Polarized, 2000h	-40	+105	2000		6.3	50	1	47	4×5.8	6.3×5.8	Silver	32	
	VVC	105°C, 3000h/5000h	-40	+105	3000	5000	6.3	50	1	1000	4×5.8	10×10	Silver	32	
	VZH	105°C, 5000h/7000h	-55	+105	5000	7000	6.3	35	22	1000	6.3×5.8	10×10	Silver	32	
Low Impedance, Low ESR, High Reliability	VVZ	105°C , Low ESR	-55	+105	1000	5000	6.3	35	4.7	2700	4×5.3	12.5×13.5	Silver	32	
	VVD	105°C , Low ESR, Long life	-55	+105	2000	5000	6.3	100	4.7	2200	4×5.8	12.5×13.5	Silver	32	
	VVV	105°C , Low ESR, High CV	-55	+105	2000		6.3	50	33	1500	6.3×5.8	10×10	Silver	32	
	VVD	105°C , Low ESR, High CV	-55	+105	2000		6.3	50	22	2200	6.3×5.8	10×10	Silver	32	
	VZK	105°C , Low ESR, High CV	-55	+105	2000		25	35	470	1000	8×10	10×10	Silver	32	★
	VVT	125°C , Low ESR	-40	+125	1000	5000	10	100	4.7	1000	4×5.8	12.5×13.5	Silver	32	
	VZJ	125°C , Low ESR, Long Life	-40	+125	2000	3000	10	50	22	470	6.3×7.7	10×10	Silver	32	☆
	VZF	125°C , Low ESR, Long Life, High CV	-40	+125	1000	4000	10	50	22	680	6.3×5.8	10×10	Silver	32	
	VZE	125°C , Low ESR, High CV	-40	+125	2000		35		47	100	6.3×7.7		Silver	32	
	VVX	135°C, Higher Reliability	-40	+135	1000		25	35	22	330	8×10	10×10	Silver	32	
For Vibration Resistance	VTZ	105°C, Low ESR, High CV, 30G Vibration resistance	-55	+105	1000	5000	6.3	35	33	8200	6.3×5.8	18×21.5	Silver	32	
	VTD	105°C, Low ESR, High CV, 30G Vibration resistance	-55	+105	2000	4000	6.3	100	10	8200	6.3×5.8	18×21.5	Silver	32	
	VTT	125°C, Low ESR, High CV, 30G Vibration resistance	-40	+125	1000	5000	10	100	10	4700	6.3×5.8	18×21.5	Silver	32	
	VTQ	150°C, Low ESR, High CV, 30G Vibration resistance	-40	+150	1000		10	35	33	470	8×10	10×10	Silver	32	

\* Be sure to "Cautions for using Aluminum Electrolytic capacitors", before using these products.

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

■ Type List for Aluminum Electrolytic Capacitors

★ : New series  
☆ : Upgrade

● Miniature Aluminum Electrolytic Capacitors

Category	Series	Application	Category Temp. Range (°C)		Life time Range (hours)		Rated Voltage Range (V.DC)		Rated Capacitance Range (μF)		Size range φD x L (mm)		Outside color	JIS Configurati	Note
			Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.			
Low profile	RC3	5mmL, Standard	-40	+85	1000		4	50	1	470	4×5	8×5	Blue	04	
	R3S	5mmL, 105°C	-55	+105	1000		6.3	50	1	100	4×5	6.3×5	Black	04	
	RB3	5mmL, Bipolar	-40	+85	1000		6.3	50	0.33	47	4×5	6.3×5	Blue	04	
	RC2	7mmL, Standard	-40	+85	1000		4	100	1	330	4×7	8×7	Blue	04	
	R2S	7mmL, 105°C	-55	+105	1000		6.3	50	1	100	4×7	6.3×7	Black	04	
	RB2	7mmL, Bipolar	-40	+85	1000		6.3	50	0.33	47	4×7	6.3×7	Blue	04	
Standard	RE3	Miniaturized Standard	-40	+85	2000		6.3	450	0.47	22000	5×11	18×40	Blue	04	
	R2B	Bipolarity Standard	-40	+85	2000		6.3	100	1	4700	5×11	18×35.5	Blue	04	
	RJP	105°C, Bipolar	-40	+105	1000	2000	6.3	50	1	6800	5×11	18×35.5	Black	04	
	RJ5	105°C, Miniaturized, High CV	-55	+105	1000		6.3	100	1	22000	5×11	18×40	Black	04	
			-40		1000		160	450	1	470	6.3×11	18×40			
	RJ4	105°C, Miniaturized	-55	+105	1000		6.3	100	1	22000	5×11	18×40	Black	04	
-40			1000		160	450	1	330	6.3×11	18×35.5					
RJ3	105°C, Low Impedance	-55	+105	1000		6.3	100	1	15000	5×11	18×35.5	Black	04		
		-40		1000		160	400	1	220	6.3×11	18×40				
Special	RLB	Low-leakage Current	-40	+85	1000		6.3	50	1	2200	5×11	18×35.5	Blue	04	
Low Impedance, Low ESR, High Reliability	RJB	105°C, Low Impedance, Miniaturized	-55	+105	2000	5000	6.3	100	3.3	10000	5×11.5	16×31.5	Black	04	
	RJH	105°C, Extra Low Impedance	-55	+105	2000	5000	6.3	100	1	15000	5×11.5	18×40	Black	04	
	RJF	105°C, Extra Low Impedance, Miniaturized	-40	+105	1000	10000	6.3	100	5.6	6800	4×7	18×40	Black	04	
	RJM	105°C, Long life, Low Impedance	-40	+105	6000	10000	6.3	50	27	8200	5×11.5	16×25	Black	04	
	RJD	105°C, Low ESR, High Ripple, Miniaturized	-55	+105	2000	8000	6.3	100	10	18000	5×11.5	18×40	Black	04	
	RKD	125°C, Low ESR, Miniaturized	-40	+125	2000	5000	10	100	100	8200	8×12	18×40	Black	04	
	RKB	135°C, Low ESR, Miniaturized	-40	+135	2000	3000	10	100	220	6800	10×12.5	18×40	Silver	04	
	RKC	135°C, Low ESR, Miniaturized	-40	+135	2000	3000	25	100	160	12000	12.5×20	18×40	Silver	04	
	RQA	150°C, Miniaturized	-40	+150	1000		10	35	220	4700	10×14.5	18×42.5	Silver	04	
	RQB	150°C, Miniaturized	-40	+150	2000		35	50	1300	4700	16×26.5	18×42.5	Silver	04	★
For Air bag	RJE	105°C, Low ESR, High Ripple, For Airbag	-55	+105	5000		25	35	830	11000	12.5×15	18×40	Black	04	
	RJK	105°C, High CV, Low ESR, High Ripple, For Airbag	-55	+105	5000		25	35	2500	17000	16×20	18×40	Black	04	
For Vibration Resistance	RPK	125°C, Low ESR, 30G Vibration resistance	-40	+125	4000	5000	10	100	220	8200	12.5×15	18×40	Black	04	
	RKE	125°C, Low ESR, 40G Vibration resistance	-40	+125	5000		25	50	1200	8200	16×31.5	18×40	Silver	04	
	RKF	135°C, Low ESR, 40G Vibration resistance	-40	+135	2000	3000	25	100	180	10000	12.5×25	18×40	Silver	04	
	RKG	150°C, Low ESR, 40G Vibration resistance	-40	+150	1000	2000	25	80	800	4700	18×42		Silver	04	

\* Be sure to "Cautions for using Aluminum Electrolytic capacitors", before using these products.

● Some of the series listed in the below table have been removed from the catalogue (discontinued series). Please select from the new series for a designing your(new) application.

Category	Series	Application	Category Temp. Range (°C)		Life time Range (hours)		Rated Voltage Range (V.DC)		Rated Capacitance Range (μF)		Size range φD x L (mm)		Substitute series to recommend
			Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	
Polymer	PRM	Ultra Low ESR Conductive Polymer Chip	-55	+105	2000		2.5	6.3	120	1200	5×5.7	10×7.7	—
Chip	VV2	85°C, 5.5mm L, Standard	-40	+85	2000		4	50	0.1	220	3×5.3	6.3×5.3	VV5
	VV3	85°C, High CV	-40	+85	2000		6.3	50	4.7	330	4×5.3	6.3×7.7	VV5
	VV1	85°C, Large Capacitance	-40	+85	2000		6.3	100	10	2200	8×6.5	12.5×13.5	VV5
	VVL	105°C, 5.5mm L	-55	+105	2000		6.3	50	1	100	4×5.7	6.3×5.7	VVZ
	VVJ	105°C, Higher Capacitance	-55	+105	2000	5000	6.3	100	10	1000	8×6.5	12.5×13.5	VVD

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

**■ Type List for Aluminum Electrolytic Capacitors**

★ : New series  
☆ : Upgrade

**● Aluminum Electrolytic Capacitors for Audio**

Category	Series	Application	Category Temp. Range (°C)		Life time Range (hours)	Rated Voltage Range (V.DC)		Rated Capacitance Range (μF)		Size range φD x L (mm)		Outside color	JIS Configurati	Note
			Min.	Max.		Min.	Max.	Min.	Max.	Min.	Max.			
For Audio	VV0	Chip Type (PURECAP)	-40	+85	2000	6.3	50	0.33	1000	4×5.3	10×10	Silver	32	
	VVM	Chip Type 105°C , 2000h	-55	+105	2000	6.3	50	1	470	4×5.8	10×10.5	Silver	32	
	VVG	Chip Type	-40	+85	2000	6.3	35	3.3	470	4×5.3	10×10	Silver	32	
	ROB	Miniaturized Standard (TONEREX)	-40	+85	1000	6.3	100	1	10000	5×11	18×40	Black	04	
	RF0	Standard (PURECAP)	-40	+85	1000	6.3	100	1	15000	5×11	18×35.5	Black	04	
	RA3	Miniaturized Standard	-40	+85	2000	6.3	100	1	22000	5×11	18×35.5	Brown	04	
	RW5	105°C , Miniaturized	-55	+105	1000	16	25	100	15000	5×11.5	18×40	Black	04	
	RBD	Miniaturized Bipolar	-40	+85	2000	6.3	100	1	4700	5×11	18×35.5	Black	04	

\* Be sure to "Cautions for using Aluminum Electrolytic capacitors", before using these products.

**● Some of the series listed in the below table have been removed from the catalogue (discontinued series). Please select from the new series for a designing your(new) application.**

Category	Series	Application	Category Temp. Range (°C)		Life time Range (hours)	Rated Voltage Range (V.DC)		Rated Capacitance Range (μF)		Size range φD x L (mm)		Substitute series to recommend
			Min.	Max.		Min.	Max.	Min.	Max.	Min.	Max.	
For Audio	VVF	Chip Type (SILMIC)	-40	+85	2000	10	50	1	100	4×5.3	8×10	—
	RFS	High Grade (SILMIC II)	-40	+85	1000	6.3	100	3.3	3300	5×11	18×40	—
	R0S	High Grade (SILMIC)	-40	+85	1000	16	100	10	2200	6.3×11	18×40	—
Special	LPM	High ripple current	-25	+85	2000	250	400	45	220	35×40	35×50	—
	LM1	High ripple current, Higher Capacitance	-25	+85	2000	250	400	90	440	35×80	40×100	—
Screw terminal	LYX	105°C. Ultra Long Life	-40	+105	5000	350	450	1000	15000	51×75	90×236	—
	LYL	Ultra Long Life	-40	+85	20000	350	450	1000	15000	51×75	90×236	—
	LY6	High Ripple, Miniaturized	-25	+85	5000	400	600	1000	22000	51×115	101×237	—
	LY5	Standard	-40	+85	2000	10	250	1500	820000	36×53	90×171	—
			350			630	470	18000	36×83	101×220	—	


**All Large Capacitance Aluminum Electrolytic Capacitors**

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.




Systematized Classification of Aluminum Electrolytic Capacitors


Conductive Polymer Hybrid Aluminum Electrolytic Capacitors

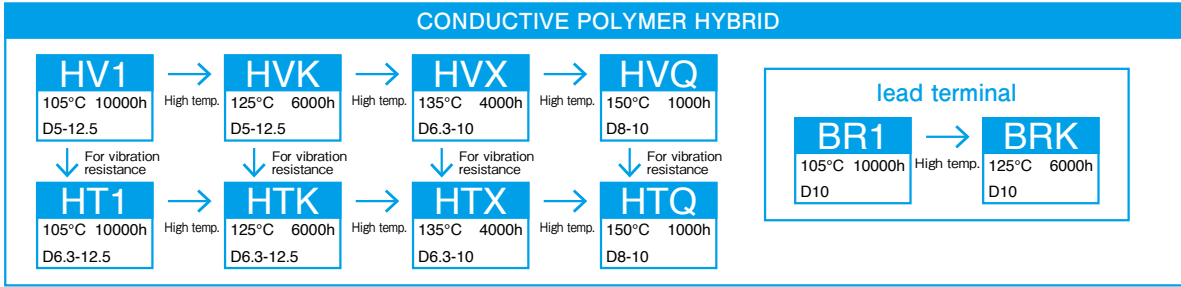

Aluminum Electrolytic Capacitors with Conductive Polymer Solid Electrolyte

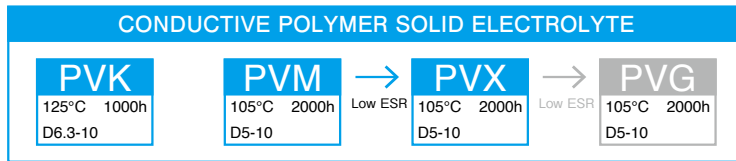


Chip Type Aluminum Electrolytic Capacitors

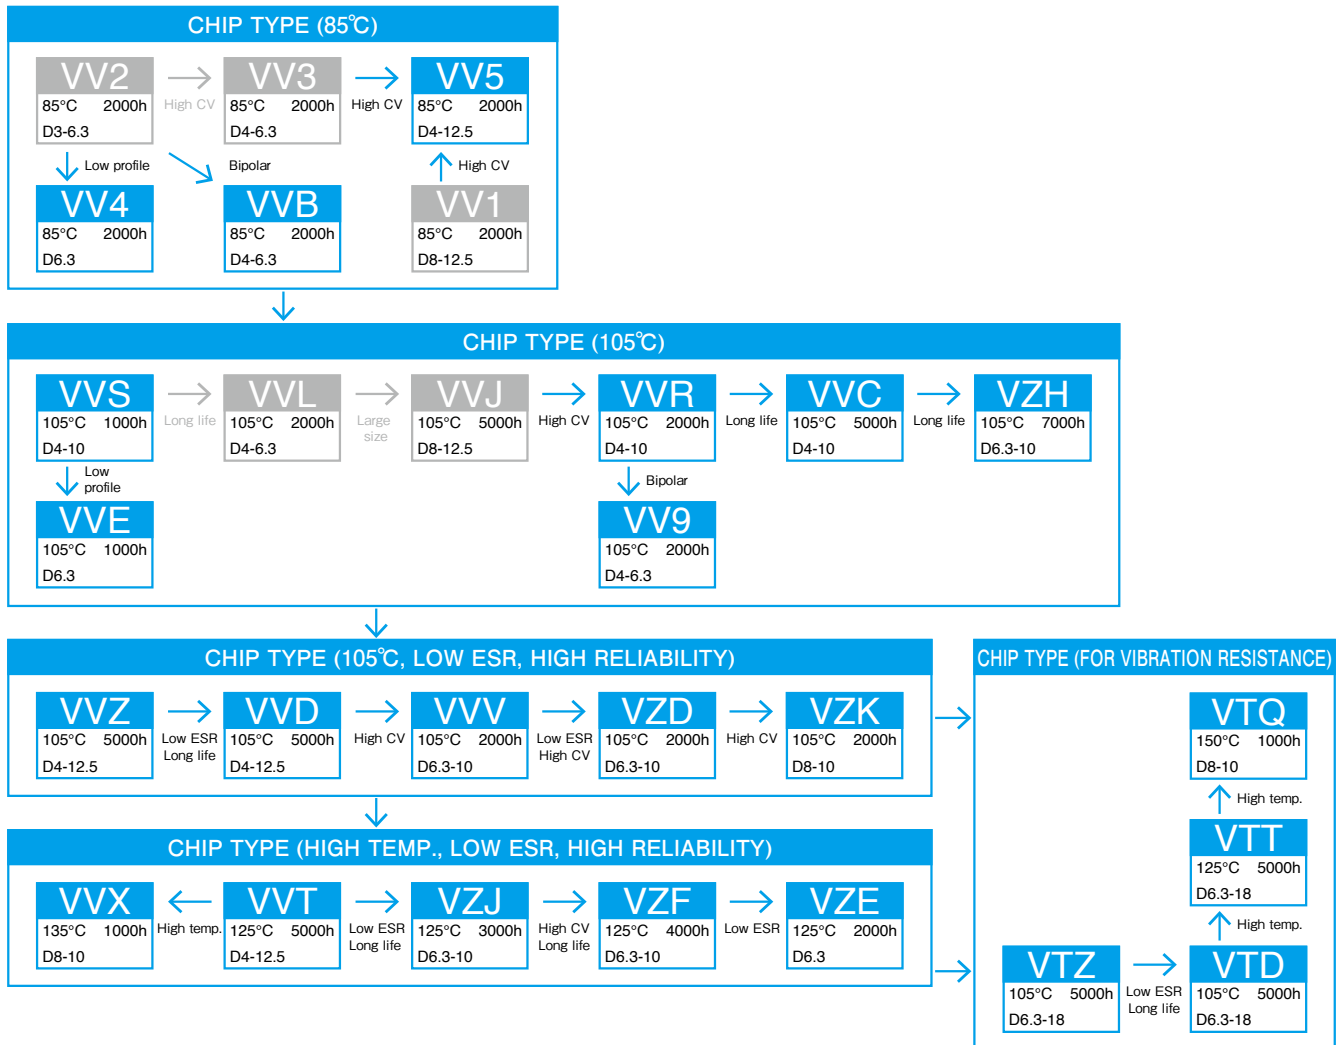

NOTE : Design, Specifications are subject to change without notice. It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

■ Systematized Classification of Aluminum Electrolytic Capacitors



● Miniature Aluminum Electrolytic Capacitors

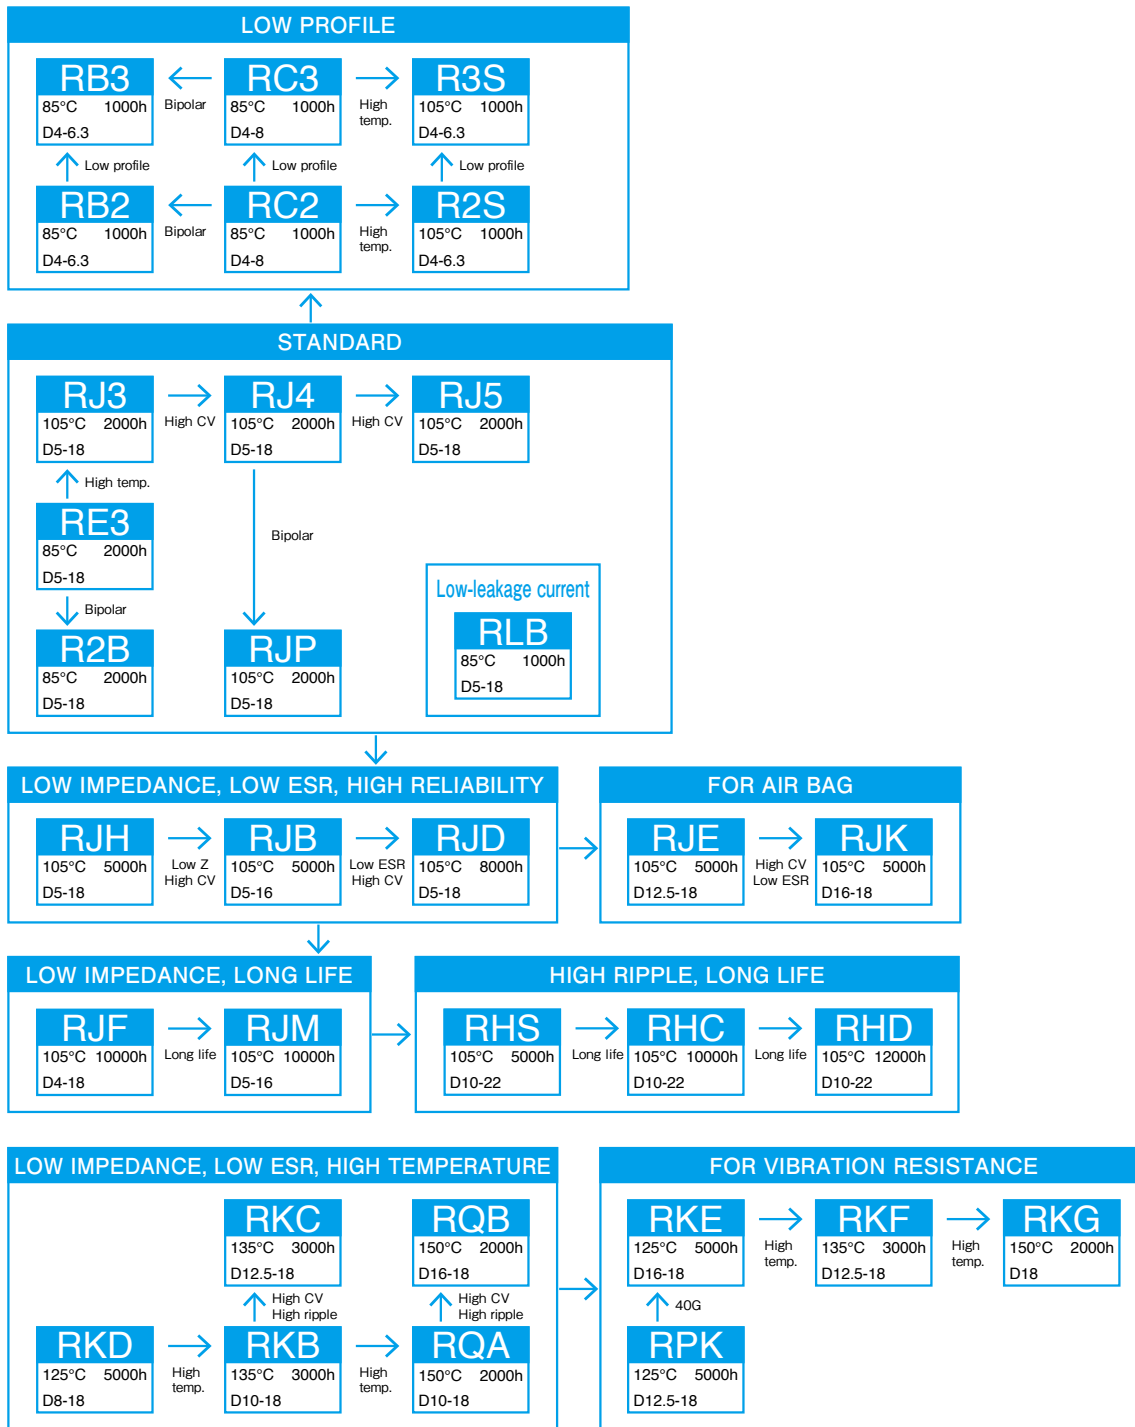

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

■ Systematized Classification of Aluminum Electrolytic Capacitors

● Aluminum Electrolytic Capacitors For Audio

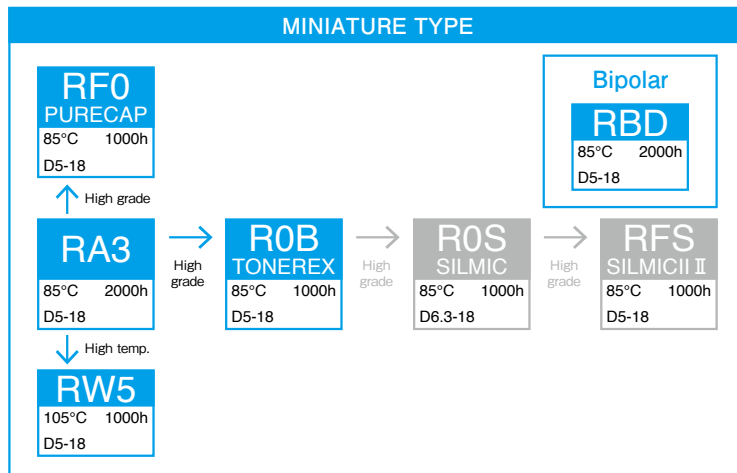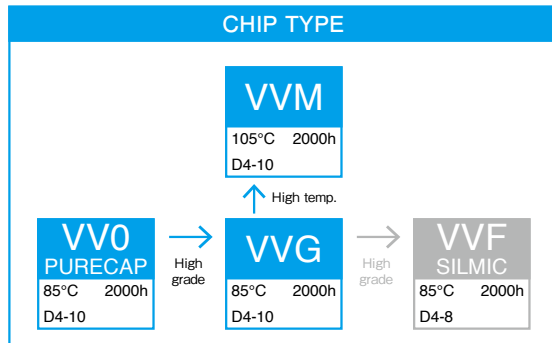


NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

### Recommended land pattern and size

(Vertical chip type)

- Standard type




(Unit : mm)

Case Size φD×L	Land Size			Thickness of Solder paste
	X	Y	W	
4×4.5, 5.3, 5.7, 5.8	1.6	2.6	1.0	0.15
5×4.5, 5.3, 5.7, 5.8	1.6	3.0	1.4	0.15
6.3×4.5, 5.3, 5.7, 5.8	1.6	3.6	1.9	0.15
6.3×7.7	1.6	3.6	1.9	0.15
8×6.5, 8.7	1.6	*4.0	*2.1	0.15
8×10, 10.5	2.5	*3.5	*3.0	0.15
10×8.7, 10, 10.5, 12.5	2.5	*4.0	*4.0	0.15
12.5×13.5	3.2	6.0	4.0	0.15

\* For Vibration resistance use  
 φ8×6.5                      Y=4.5 W=1.0  
 φ8×10, φ8×10.5        Y=4.0 W=2.5  
 φ10×10, φ10×10.5    Y=4.5 W=3.0  
 φ10×12.5                Y=4.5 W=3.0

- For vibration resistance type

VTZ, VTD, VTT, VTQ, VTV, VMH, VMD, VMJ, VMF, VME, HT1, HTK, HTX, HTQ series



(Unit : mm)

Case Size φD	Land Size			Thickness of Solder paste
	X	Y	W	
6.3	3.0	4.0	1.6	0.20
8	5.0	4.0	2.5	0.20
10	5.0	4.8	3.6	0.20
12.5	7.0	6.6	3.2	0.20
16	10.5	7.8	5.0	0.20
18	10.5	8.8	5.0	0.20

NOTE : Design, Specifications are subject to change without notice.  
 It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

## ■ Recommended soldering conditions (Lead free)


### ● Aluminum (Conductive Polymer, Hybrid) electrolytic capacitors (Lead terminal type)

(1) Soldering iron conditions

Iron tip temperature shall be  $400^{\circ}\text{C} \pm 5^{\circ}\text{C}$  within the duration of  $3^{\pm 1}$  seconds.

(2) Flow soldering conditions

The recommendation soldering conditions of the product in which flow soldering is possible are as graph.

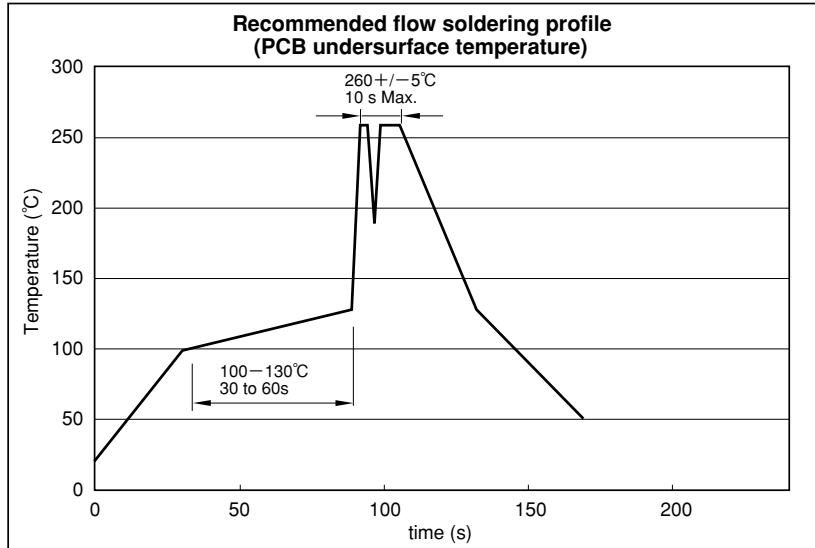


### Caution for Using aluminum Electrolytic Capacitors

- (1) Do not dip the capacitor into melted solder.
- (2) Do not flux other part than the terminals.
- (3) If there is a direct contact between the sleeve of the capacitor and the printed circuit pattern or a metal part of another component such as a lead wire, it may cause shrinkage or crack.
- (4) If the application is for extended use, understand and manage the soldering characteristics to avoid abnormal current caused by a contact failure between the capacitor and the PCB.
- (5) Please refer to cautions for using on page and product specifications about other notes.

### ■ Recommended soldering conditions (Lead free)

#### ● Chip type aluminum (Conductive Polymer, Hybrid) electrolytic capacitors

- (1) Soldering iron conditions  
Iron tip temperature shall be  $400^{\circ}\text{C} \pm 5^{\circ}\text{C}$  within the duration of 3<sup>±</sup> seconds.
- (2) Reflow soldering conditions

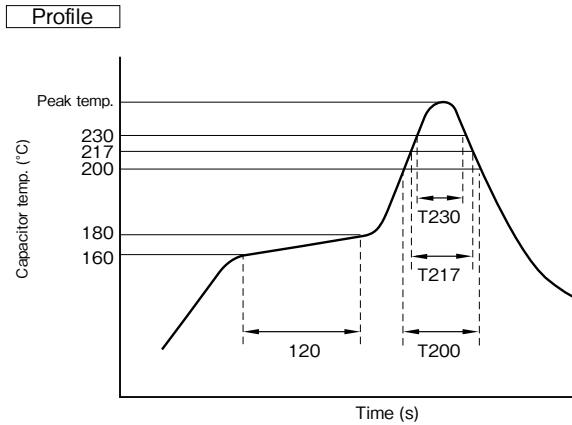

1. Preheating shall be under 180°C within 120 seconds.
2. Peak temperature shall be within the following table.
3. For conditions exceeding the tolerances, consult with us.

T200 : Duration while capacitor head temperature exceeds 200°C (s)  
 T217 : Duration while capacitor head temperature exceeds 217°C (s)  
 T230 : Duration while capacitor head temperature exceeds 230°C (s)  
 The measurement temperature point is the case top.

#### ● Chip type aluminum Conductive Polymer, Hybrid electrolytic capacitors

Series	Size	Peak temp. (5sec or less)	T230	T217	T200	Reflow cycle
HV1, HVK, HVX, HVQ, HT1, HTK, HTX, HTQ, PVX, PVM, PVK	φ 5 to φ 6.3	250°C Max.	40 sec. max.	50 sec. max.	60 sec. max.	2 times or less
	φ 8 to φ 10	240°C Max.	40 sec. max.	50 sec. max.	60 sec. max.	2 times or less
	φ 12.5	240°C Max.	20 sec. max.	30 sec. max.	50 sec. max.	2 times or less

#### ● Chip type aluminum electrolytic capacitors


Series	Size	Peak temp. (5sec or less)	T230	T217	T200	Reflow cycle
VV2, VV3, VV5, VV1, VVB, VVS, VVR, VVC, VZH, VVZ, VVD, VVV, VZD, VZK, VVT, VZJ, VZF, VZE, VVX, VVE, VV9, VV0, VVM, VVG	φ 4 to φ 6.3	250°C Max.	40 sec. max.	50 sec. max.	60 sec. max.	2 times or less
	φ 8 to φ 10	240°C Max.	40 sec. max.	50 sec. max.	60 sec. max.	2 times or less
	φ 12.5	240°C Max.	20 sec. max.	30 sec. max.	50 sec. max.	2 times or less
VV4	φ 4 to φ 5	250°C Max.	40 sec. max.	50 sec. max.	60 sec. max.	2 times or less
	φ 6.3	240°C Max.	40 sec. max.	50 sec. max.	60 sec. max.	2 times or less
VZA, VZB, VZC	φ 4 to φ 6.3	260°C Max.	40 sec. max.	90 sec. max.	—	2 times or less
	φ 8 to φ 10	250°C Max.	40 sec. max.	90 sec. max.	—	2 times or less
VTZ, VTD, VTT, VTQ, VTV, VMH, VMD, VMK, VMJ, VMF, VME	φ 6.3	250°C Max.	40 sec. max.	60 sec. max.	80 sec. max.	2 times or less
	φ 8 to φ 10	250°C Max.	30 sec. max.	60 sec. max.	80 sec. max.	2 times or less
	φ 12.5 to φ 18	240°C Max.	20 sec. max.	30 sec. max.	50 sec. max.	2 times or less

\*Please ensure that the capacitor became cold enough to the room temperature (5 to 35°C) before the second reflow.


## Taping

### Carrier tape dimension (taping polarity R)

●  $\phi 4$  to  $\phi 10$


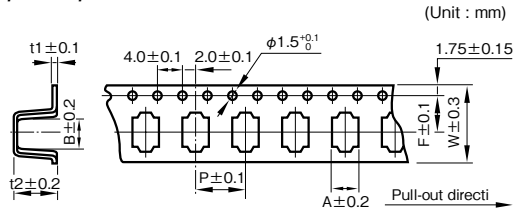


●  $\phi 12.5$  to 18

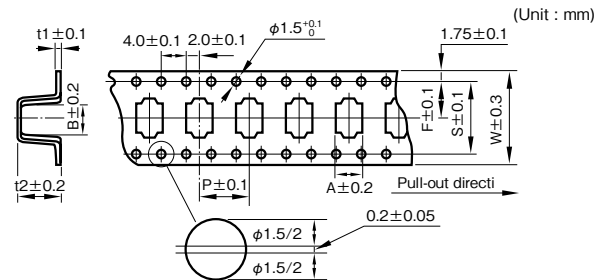

### Taping polarity


(The all series except bipolar type)



(Unit : mm)

Outside size $\phi D \times L$	W	A	B	P	t2	F	t1	S
4×4.5	12	4.7	4.7	8.0	4.8	5.5	0.4	—
4×5.3	12	4.7	4.7	8.0	5.8	5.5	0.4	—
4×5.7, 5.8	12	4.7	4.7	8.0	6.2	5.5	0.4	—
5×4.5	12	5.7	5.7	12	4.8	5.5	0.4	—
5×5.3	12	5.7	5.7	12	5.8	5.5	0.4	—
5×5.7, 5.8	12	5.7	5.7	12	6.2	5.5	0.4	—
6.3×4.5	16	7.0	7.0	12	4.8	7.5	0.4	—
6.3×5.3	16	7.0	7.0	12	5.8	7.5	0.4	—
6.3×5.7, 5.8	16	7.0	7.0	12	6.2	7.5	0.4	—
6.3×7.7	16	7.0	7.0	12	8.3	7.5	0.4	—
8×6.5	16	8.7	8.7	12	6.8	7.5	0.4	—
8×8.7	24	8.7	8.7	16	9.5	11.5	0.4	—
8×10	24	8.7	8.7	16	11	11.5	0.4	—
8×10.5	24	8.7	8.7	16	11.5	11.5	0.4	—
10×8.7	24	10.7	10.7	16	9.5	11.5	0.4	—
10×10	24	10.7	10.7	16	11	11.5	0.4	—
10×10.5	24	10.7	10.7	16	11.5	11.5	0.4	—
10×12.5	24	10.7	10.7	16	13.0	11.5	0.4	—
* 12.5×13.5	32	13.4	13.4	24	14.5	14.2	0.5	28.4
* 16×16.5	44	17	17	28	17.5	20.2	0.5	40.4
* 16×21.5	44	17	17	28	22.5	20.2	0.5	40.4
* 18×16.5	44	19	19	32	17.5	20.2	0.5	40.4
* 18×21.5	44	19	19	32	22.5	20.2	0.5	40.4

### Reel dimension



(Unit : mm)

Outside size $\phi D \times L$	Reel dimension	
	W	t
4	14	3
5	14	3
6.3	18	3
8×6.5	18	3
8, 10	26	3
* 12.5	34	3
* 16	46	3
* 18	46	3

### Packing quantity (Reel)

Outside size $\phi D \times L$	Quantity (PCS.)
4	2000
5, 6.3	1000
8×6.5	1000
8×8.7 to 10.5	500
10×8.7 to 10.5	500
10×12.5	400
* 12.5×13.5	200
* 16×16.5	125
* 16×21.5	75
* 18×16.5	125
* 18×21.5	75

### Reel material

The details is refer to "Product Code System" pages.

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

### Lead Forming

• In order to facilitate insertion into printed circuit board, lead wires are cut or formed.

#### Product Size Table

Unit: mm

Forming name	Lead forming symbol	Dimension		Style	Outline drawing																						
		F (Lead pitch)	φD (Case diameter)																								
Forming cut	F10	2.0	4	B	<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>Processed style A</p> </div> <div style="text-align: center;"> <p>Processed style B</p> </div> </div>																						
	F1		5	A																							
	F12	2.5	4 to 5	B																							
	F1		6.3	A																							
	F1	3.5	8	A																							
	F4		4 to 8	B																							
	F	5.0	4 to 8	B																							
	F		10 to 12.5	A																							
F	7.5	16 to 18	A																								
Snap-in	S1	5.0	4 to 8	B	<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>Processed style A</p> </div> <div style="text-align: center;"> <p>Processed style B</p> </div> </div>																						
	S1		10 to 12.5	A																							
	S1	7.5	16 to 18	A																							
	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Forming name</th> <th>Lead forming symbol</th> <th>F (Lead pitch)</th> <th>φD (Case diameter)</th> <th>Style</th> </tr> </thead> <tbody> <tr> <td rowspan="5">Forming cut (restrict series)</td> <td>F49</td> <td rowspan="2">5.0</td> <td>10 to 12.5</td> <td></td> </tr> <tr> <td>F51</td> <td>10 to 12.5</td> <td></td> </tr> <tr> <td>F58</td> <td>10</td> <td></td> </tr> <tr> <td>F49</td> <td rowspan="2">7.5</td> <td>16 to 18</td> <td></td> </tr> <tr> <td>F51</td> <td>16 to 18</td> <td></td> </tr> </tbody> </table>					Forming name	Lead forming symbol	F (Lead pitch)	φD (Case diameter)	Style	Forming cut (restrict series)	F49	5.0	10 to 12.5		F51	10 to 12.5		F58	10		F49	7.5	16 to 18		F51	16 to 18
Forming name	Lead forming symbol	F (Lead pitch)	φD (Case diameter)	Style																							
Forming cut (restrict series)	F49	5.0	10 to 12.5																								
	F51		10 to 12.5																								
	F58	10																									
	F49	7.5	16 to 18																								
	F51		16 to 18																								
<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>F49</p> </div> <div style="text-align: center;"> <p>F51</p> </div> </div> <div style="display: flex; justify-content: center; margin-top: 10px;"> <div style="text-align: center;"> <p>F58</p> </div> </div>																											

Forming name	Lead forming symbol	Dimension				Outline drawing
		F (Lead pitch)	φD (Case diameter)	ℓ <sub>0</sub>	ℓ <sub>1</sub>	
For 90° side mount of case	G9, G10	3.5	8	5.5	1.0	<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>G9, G55, G59, G95, G99, GAS</p> </div> <div style="text-align: center;"> <p>G10, G56, G60, G96, GA0, GAT</p> </div> </div>
	G59, G60		8	3.6	1.0	
	G9, G10	5.0	10 to 12.5	5.5	1.0	
	G55, G56		12.5	7.5	2.5	
	G59, G60		10 to 12.5	3.6	1.0	
	G95, G96		12.5	0.95	4.9	
	G99, GA0	10	1.0	1.9		
	GAS, GAT	7.5	10 to 12.5	4.5	1.0	
	G9, G10		16 to 18	5.5	1.0	
	GAS, GAT	16 to 18	4.5	1.0		


Please contact us for lead forming and packing code in regards to the product code.

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.



## Taping

• For automatic insertion (radial lead type)

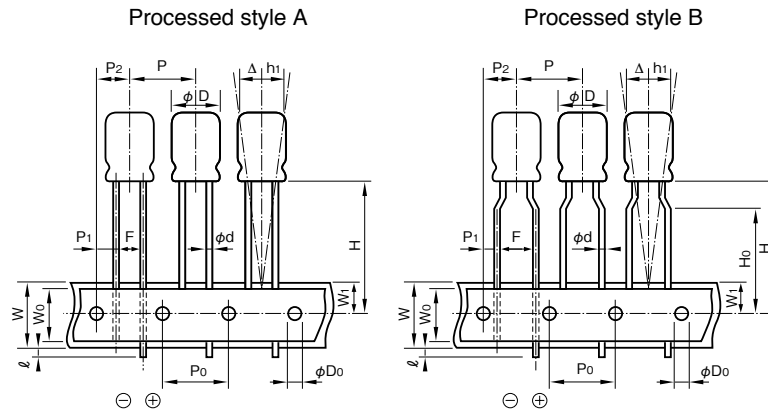

\*The shape of a lead wire sandwiched by the mounting strips may differ from the ones shown in the figures.

## Product Size Table

Unit: mm

Item	Symbol	Tolerance	5L to 8L	
			$\phi 4$ to $\phi 8$ (except $\phi 8 \times 7L$ )	$\phi 4$ to $\phi 8$
Lead forming symbol	—	—	T36	T2
Style	—	—	A or B	B
Lead-wire diameter	$\phi d$	$\pm 0.05$	0.4 or 0.45	
Lead to lead distance	F	$+0.8$ $-0.2$	2.5	5.0
Height of component from tape center	H	$+0.75$ $-0.5$	18.5	17.5
Lead-wire clinch height	$H_0$	$\pm 0.5$	—	16.0 ( $\phi 4$ ) 16.0
Pitch of component	P	$\pm 1.0$	12.7	
Feed hole pitch	$P_0$	$\pm 0.3$	12.7	
Hole center to lead	$P_1$	$\pm 0.5$	5.1	3.85
Hole center to component	$P_2$	$\pm 1.0$	6.35	
Tape width	W	$\pm 0.5$	18.0	
Hold down tape width	$W_0$	Min.	6.0	
Feed hole position	$W_1$	$\pm 0.5$	9.0	
Max. lead protrusion	$\ell$	Max.	1.0	
Feed hole diameter	$\phi D_0$	$\pm 0.2$	4.0	
Alignment of component to center	$\Delta h$	$\pm 1.0$	0	
Alignment of component to center	$\Delta h_1$	$\pm 1.0$	0	
Total tape thickness	t	$\pm 0.2$	0.7	

Please contact us for lead forming and packing code in regards to the product code.

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

## ■ Taping

- For automatic insertion (radial lead type)

Product Size Table

Unit: mm

Item	Symbol	Tolerance	11L to 25L					
			φ5, φ6.3		φ8	φ10	φ12.5	
Lead forming symbol	—	—	T36	T58	T2	T2	T2	T4
Style	—	—	A or B		B		A	
Lead-wire diameter	φd	±0.05	0.5 or 0.6			0.6		
Lead to lead distance	F	+0.8 -0.2	2.5		5.0			
Height of component from tape center	H	+0.75 -0.5	18.5	17.5	18.5	20.0	18.5	
Lead-wire clinch height	Ho	±0.5	—		16.0		—	
Pitch of component	P	±1.0	12.7					15.0
Feed hole pitch	Po	±0.3	12.7					15.0
Hole center to lead	P1	+0.5 (10 to φ18 ±0.7)	5.1		3.85			5.0
Hole center to component	P2	±1.0	6.35					7.5
Tape width	W	±0.5	18.0					
Hold down tape width	Wo	Min.	6.0					
Feed hole position	W1	±0.5	9.0					
Max. lead protrusion	ℓ	Max.	1.0					
Feed hole diameter	φD0	±0.2	4.0					
Alignment of component to center	Δh	±1.0	0					
Alignment of component to center	Δh1	±1.0	0					
Total tape thickness	t	±0.2	0.7					

Please contact us for lead forming and packing code in regards to the product code.



## Standard packing specification of aluminum (Conductive Polymer, Hybrid) electrolytic capacitors (taping article)



Classification	Chip type	
	Conductive polymer hybrid aluminum electrolytic capacitors, Aluminum electrolytic capacitors	Aluminium electrolytic capacitors with conductive polymer solid electrolyte
Packing style	<p>Reel</p> <p>Inner box</p>	<p>Reel</p> <p>Dampproof bag</p> <p>Inner box</p>

Classification	Lead terminal type																																																																										
Packing style	<p>Inner box</p> <p>Outer box</p>	<p>Packing size and quantity</p> <table border="1"> <thead> <tr> <th rowspan="2">Case size</th> <th colspan="3">Size (mm max.)</th> <th rowspan="2">Quantity (pcs)</th> </tr> <tr> <th>W</th> <th>L</th> <th>H</th> </tr> </thead> <tbody> <tr><td><math>\phi 4 \times 5, \phi 4 \times 7</math></td><td>210</td><td>340</td><td>55</td><td>2,000</td></tr> <tr><td><math>\phi 5 \times 5, \phi 5 \times 7</math></td><td>270</td><td>340</td><td>55</td><td>2,000</td></tr> <tr><td><math>\phi 5 \times 11, \phi 5 \times 11.5</math></td><td>265</td><td>340</td><td>55</td><td>2,000</td></tr> <tr><td><math>\phi 6.3 \times 5, \phi 6.3 \times 7</math></td><td>300</td><td>340</td><td>55</td><td>2,000</td></tr> <tr><td><math>\phi 6.3 \times 11, \phi 6.3 \times 11.5</math></td><td>300</td><td>340</td><td>60</td><td>2,000</td></tr> <tr><td><math>\phi 8 \times 5, \phi 8 \times 7</math></td><td>270</td><td>340</td><td>55</td><td>1,000</td></tr> <tr><td><math>\phi 8 \times 11.5, \phi 8 \times 12</math></td><td>265</td><td>340</td><td>55</td><td>1,000</td></tr> <tr><td><math>\phi 8 \times 15, \phi 8 \times 20</math></td><td>255</td><td>345</td><td>65</td><td>1,000</td></tr> <tr><td><math>\phi 10 \times 12.5, \phi 10 \times 16</math></td><td>215</td><td>340</td><td>60</td><td>500</td></tr> <tr><td><math>\phi 10 \times 20</math></td><td>210</td><td>340</td><td>65</td><td>500</td></tr> <tr><td><math>\phi 12.5 \times 15</math></td><td>290</td><td>340</td><td>65</td><td>500</td></tr> <tr><td><math>\phi 12.5 \times 20</math></td><td>290</td><td>340</td><td>65</td><td>500</td></tr> <tr><td><math>\phi 12.5 \times 25</math></td><td>290</td><td>340</td><td>70</td><td>500</td></tr> </tbody> </table>	Case size	Size (mm max.)			Quantity (pcs)	W	L	H	$\phi 4 \times 5, \phi 4 \times 7$	210	340	55	2,000	$\phi 5 \times 5, \phi 5 \times 7$	270	340	55	2,000	$\phi 5 \times 11, \phi 5 \times 11.5$	265	340	55	2,000	$\phi 6.3 \times 5, \phi 6.3 \times 7$	300	340	55	2,000	$\phi 6.3 \times 11, \phi 6.3 \times 11.5$	300	340	60	2,000	$\phi 8 \times 5, \phi 8 \times 7$	270	340	55	1,000	$\phi 8 \times 11.5, \phi 8 \times 12$	265	340	55	1,000	$\phi 8 \times 15, \phi 8 \times 20$	255	345	65	1,000	$\phi 10 \times 12.5, \phi 10 \times 16$	215	340	60	500	$\phi 10 \times 20$	210	340	65	500	$\phi 12.5 \times 15$	290	340	65	500	$\phi 12.5 \times 20$	290	340	65	500	$\phi 12.5 \times 25$	290	340	70	500
Case size	Size (mm max.)			Quantity (pcs)																																																																							
	W	L	H																																																																								
$\phi 4 \times 5, \phi 4 \times 7$	210	340	55	2,000																																																																							
$\phi 5 \times 5, \phi 5 \times 7$	270	340	55	2,000																																																																							
$\phi 5 \times 11, \phi 5 \times 11.5$	265	340	55	2,000																																																																							
$\phi 6.3 \times 5, \phi 6.3 \times 7$	300	340	55	2,000																																																																							
$\phi 6.3 \times 11, \phi 6.3 \times 11.5$	300	340	60	2,000																																																																							
$\phi 8 \times 5, \phi 8 \times 7$	270	340	55	1,000																																																																							
$\phi 8 \times 11.5, \phi 8 \times 12$	265	340	55	1,000																																																																							
$\phi 8 \times 15, \phi 8 \times 20$	255	345	65	1,000																																																																							
$\phi 10 \times 12.5, \phi 10 \times 16$	215	340	60	500																																																																							
$\phi 10 \times 20$	210	340	65	500																																																																							
$\phi 12.5 \times 15$	290	340	65	500																																																																							
$\phi 12.5 \times 20$	290	340	65	500																																																																							
$\phi 12.5 \times 25$	290	340	70	500																																																																							

Please inquire for details.

## Standard packing specification of aluminum electrolytic capacitors (long lead, lead forming)

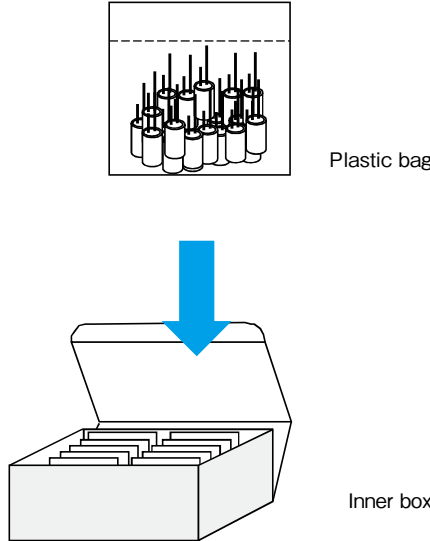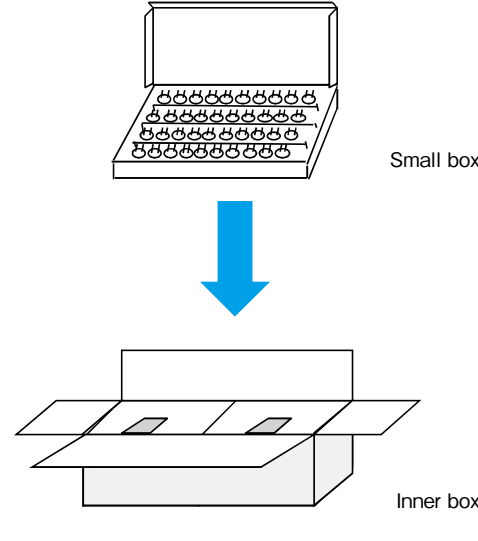Classification	Long lead, Lead forming of $\phi 10$ or less (Standard packing)	Lead forming of $\phi 12.5$ or more (Standard packing)
Packing style	 <p>Plastic bag</p> <p>Inner box</p>	 <p>Small box</p> <p>Inner box</p>

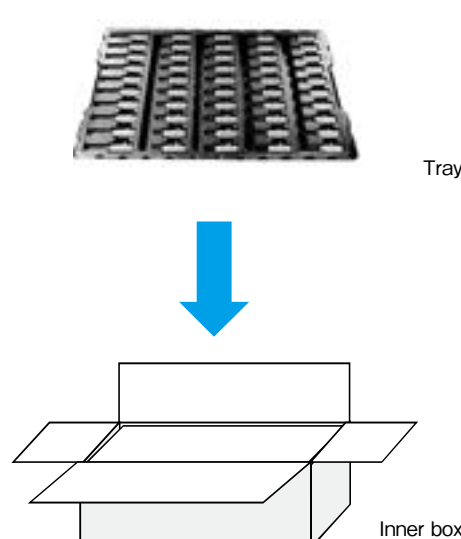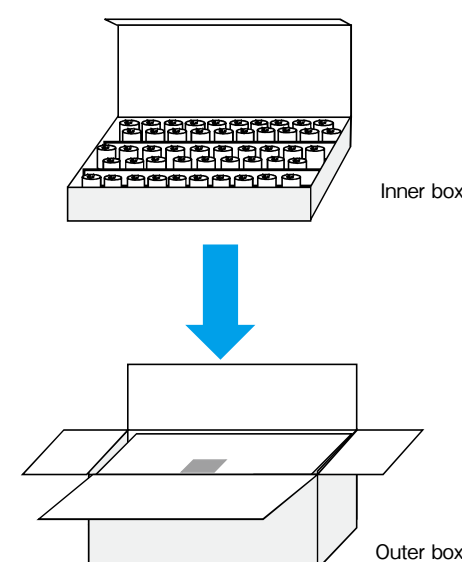Classification	$\phi 10$ to $\phi 22$ (Optional packing)	$\phi 22$ or more (Standard packing)
Packing style	 <p>Tray</p> <p>Inner box</p>	 <p>Inner box</p> <p>Outer box</p>

Please inquire for details.

**Conductive Polymer Hybrid Aluminum Electrolytic Capacitors  
Aluminum Electrolytic Capacitors With Conductive Polymer Solid Electrolyte**

## ■ Cautions for Using Conductive Polymer Hybrid Aluminum Electrolytic Capacitors, Aluminum Electrolytic Capacitors With Conductive Polymer Solid Electrolyte

Please be sure to read this specification before using this product.

Before placing an order, please inquire about the Specification to check details.

### ■ Cautions for Usage

#### 1. Conductive Polymer Hybrid Aluminum Electrolytic Capacitors, Solid Conductive Polymer Aluminum Electrolytic Capacitors are polarized.

- Using a capacitor with reversed polarity causes abnormal current flow, resulting in a short circuit.
- Cannot use for the circuit to which the polarity reverses by ripple voltage.

#### 2. Prohibited Circuits

- Since leakage current problem may arise, capacitors cannot be used in the following circuits.

- ① Coupling circuits
- ② Circuits greatly affected by leakage current

#### 3. Use capacitors within the rated voltage.

- The application of voltages exceeding the rated voltage can significantly increase leakage current, resulting in a short failure. Please do not apply a voltage exceeding the rated voltage.

#### 4. Be careful of excessive rush current.

- Using capacitors in the circuit where excessive rush current passes may cause characteristic deterioration or a short. When the rush current exceeds 10 A, we recommend use of protection circuits to ensure high reliability.

#### 5. Use the allowable ripple voltage and the rated ripple current below the specified values.

- When superimposing a ripple voltage on a DC bias voltage, exercise care that the peak voltage value does not exceed the rated voltage and does not reverse the polarity.
- The rated ripple current shall be below the specified value.

#### 6. Changes in characteristics due to operating temperature

- The characteristics of conductive polymer hybrid aluminum electrolytic capacitors, solid conductive polymer aluminum electrolytic capacitors vary by temperature as follows. These variations are temporary and recover when the temperature goes back (except for the case of characteristic deterioration because of high temperatures over a long time). Note that using capacitors over the upper category temperature increases leakage current, resulting in a short and destruction.

Be careful of the capacitor temperature considering not only the ambient temperature where the equipment is placed and the temperature inside the equipment but also radiation heat from the heating element inside the equipment, and self-heat

generation by ripple current.

- ① Capacitance expressed in the value at 20°C, 120 Hz increases with increased temperature and decreases with decreasing temperature.
- ② Tangent of loss angle ( $\tan\delta$ ) expressed in the value at 20°C, 120 Hz is temperature-independent.
- ③ Equivalent series resistance (ESR) expressed in the value at 20°C, 100 kHz is temperature independent.
- ④ Leakage current increases with increased temperature and decreases with decreasing temperature.

#### 7. Changes in characteristics due to frequency

- The characteristics of conductive polymer hybrid aluminum electrolytic capacitors, solid conductive polymer aluminum electrolytic capacitors vary by operating frequency as follows.

- ① Capacitance expressed in the value at 20°C, 120 Hz decreases with increased frequency.
- ② Tangent of loss angle ( $\tan\delta$ ) expressed in the value at 20°C, 120 Hz increases with increased frequency.
- ③ Equivalent series resistance (ESR) expressed in the value at 20°C, 100 kHz increases with decreasing frequency.

#### 8. Failure modes of solid conductive polymer aluminum electrolytic capacitors

- The failure modes of solid conductive polymer aluminum electrolytic capacitors are a wear-out failure by deterioration of electrical performance and a random failure by a short. The failure rate level is 0.5%/1,000h at the reliability level of 60% with the specified voltage applied at 105°C.
- If a short occurs and continues with the application of a voltage exceeding the rated voltage, increasing the internal temperature, the internal pressure increases by vaporization of the cathode material, which may cause the aluminum case to come off.

#### 9. Operating environments

- Do not use capacitors in an environment directly exposed to water, saltwater spray, oil spill or condensation.
- Do not use capacitors in an environment filled with toxic gas such as hydrogen sulfide, sulfurous acid, nitrous acid, chlorine, ammonia, etc.
- Do not use capacitors in a place exposed to ozone, ultraviolet rays, or radiation.

#### 10. Fumigation Process

- Before transportation of electronic equipment to overseas, fumigation process may be subjected to wooden packing material with a halogen (compound) gas such as methyl bromide. Exercise care that this halogen gas may corrode capacitors. Also, be careful of epidemic preventive agent as corrosive component such as halogen may be contained.
- 11. The case of Conductive Polymer Hybrid Aluminum Electrolytic Capacitors, Solid Conductive Polymer Aluminum Electrolytic Capacitors and the cathode terminal are not insulated.**
- The case and the cathode terminal are not insulated as being connected through inconstant resistance.
- 12. Double-sided PCB's**
- When using capacitors on a double-sided PCB, exercise care that the wiring pattern does not touch the area where the capacitors are mounted. Failure to do so may cause a short to occur to the PCB depending on the mounting conditions.
- 13. Regarding Connection of Conductive Polymer Hybrid Aluminum Electrolytic Capacitors, Solid Conductive Polymer Aluminum Electrolytic Capacitors**
- When connecting more than one capacitor in parallel, consider the current balance.
- 14. Use at a high altitude**
- The use of capacitors at high altitudes such as on an airplane causes a large difference between the internal pressure of the capacitors and the atmospheric pressure. However, there is no problem in use under atmospheric pressure up to about an altitude of 10,000 meters.  
If the condition is severe like space, please contact us.
- 15. Other Notes**
- Do not use capacitors on a circuit where rapid charge and discharge are repeated.
  - Electrical characteristics of capacitors vary by variations in temperature and frequency. Please consider these variations when designing a circuit.
- **Cautions for Mounting**
- 1. Cautions for Mounting**
- Do not reuse capacitors that have been assembled in a set and energized. Capacitors cannot be reused except for those which have been measured on electrical performance during periodic inspection.
  - Before mounting, confirm the capacitor ratings (rated capacitance and rated voltage).
  - Capacitors may generate transient recovery voltage. In this case, discharge through a resistor of about 1 k $\Omega$ .
  - Before mounting, confirm the polarity of capacitor.
  - Do not drop capacitors onto a floor nor use them.
  - Do not mount deformed capacitors.
  - Do not mount heating parts around capacitors and on the back of the PCB under or back of capacitors).
- 2. Do not apply excessive pressure to the capacitor or its terminals**
- Be careful of the shock force that can be produced by absorbers, product checkers, and centering on automatic inserters and installers.
- 3. Soldering**
- Do not solder capacitor body by dipping into melted solder.
  - Soldering conditions (preheating, soldering temperature, terminal dipping time) should be within the ranges specified in the catalog or the delivery specification.  
Please refer to individual page.
  - Flux should not adhere to the parts other than the terminals.
  - When using a soldering iron, avoid excessive stress to capacitor body.
  - Although leakage current may increase (from a few  $\mu\text{A}$  to hundreds of  $\mu\text{A}$ ) after soldering, it can be reduced through self-repair by applying voltage. It is advised to operate the set properly after treating with the recommended voltage.
  - In case of a long-term use of equipment, control the soldering characteristics so that capacitors and PCB do not fail to connect to avoid abnormal current passage by a failure of soldering to mount.
- 4. Handling after Soldering**
- Do not tilt, fall, raise or twist capacitor body.
  - Do not pick up or move PCB by holding a capacitor.
  - Do not bump capacitors against objects. When stacking PCB's, make sure that capacitors do not touch the PCB's or other components.
  - Do not subject capacitors to excessive stress.
- 5. Cleaning after Soldering**
- Recommended cleaning method
    - ① Cleaning solutions:
      - (a) CLEANTHROUGH 710M, 750H, 750L
      - (b) PINEALPHA ST-100S
      - (c) Techno Care FRW-4~17
      - (d) Isopropyl alcohol (2-propanol)
    - ② Cleaning conditions:
      - (a) The temperature of cleaning solution shall be less than 60°C.
      - (b) Use immersion or ultrasonic waves within two minutes.

- (c) After cleaning, capacitors and PCB's shall thoroughly be rinsed and dried with hot blast for more than 10 minutes. The temperature of such breeze should be less than the upper category temperature.
- (d) After cleaning, do not keep capacitors in cleaning solution atmosphere or airtight containers.
- During cleaning, control the cleaning solution against contamination.

#### 6. Fixing adhesives and coating materials.

- Do not use halogenated fixatives and coatings.
- Before using a fixative or coating, remove flux residues and contaminants from between the PCB and the sealing section of capacitors.
- Dry the cleaning solution before using the adhesive or coating.
- Do not cover up all the sealing sections (terminal side) of capacitors with the adhesive or coating.
- Heat curing conditions of fixative and coating.

#### ■ Other Cautions

##### 1. Do not directly touch the terminals of Conductive Polymer Hybrid Aluminum Electrolytic Capacitors, Solid Conductive Polymer Aluminum Electrolytic Capacitors.

Failure to do so can cause electric shock or burns. Before use, allow capacitors to discharge through a 1kΩ resistor (with a sufficient margin to the heat generation capacity) as needed.

##### 2. Do not short-circuit between the terminals of the Conductive Polymer Hybrid Aluminum Electrolytic Capacitors, Solid Conductive Polymer Aluminum Electrolytic Capacitors. Do not subject capacitors to conductive solutions such as acid and alkaline water solutions.

##### 3. Periodic inspection should be performed on the capacitors for the industrial equipment application.

Check the following checkpoints.

- Visual inspection to check for significant defects.
- Electrical performance: leakage current, rated capacitance, tangent of loss angle, ESR, and items specified in the catalog or the specification.

##### 4. Be careful of the following cases of emergency.

- In case of a short during use of capacitors in sets, producing gas, turn off the main power of the set or unplug the power cord from the outlet.
- In case of a short, producing gas, it may take a few seconds to a few minutes depending on the conditions. Therefore, ensure that the protective circuit of the power supply works during this time.
- If the gas gets in your eyes, rinse them immediately. Gargle if the gas is inhaled.

- Do not lick the electrolyte of capacitors. When the electrolyte gets on your skin, wash it off with soap immediately.

#### 5. Storage Conditions.

- Do not store at high temperature and high humidity. Store at a temperature of 5 to 35°C and a relative humidity of less than 75%, keeping free from direct sunlight.
- Solid conductive polymer aluminum electrolytic capacitors are during delivery, stored in airtight moistureproof bags to ensure satisfactory soldering. Once the bag is opened right before mounting, it is better to use up the capacitors. If some are unavoidably left over, return them to the moistureproof bag, and seal the opening hermetically.
- There may have increased leakage current when unused or stored for a long time after mounted on equipment. This phenomenon often occurs at high ambient temperatures; however, leakage current will decrease through voltage treatment. If leakage current still increases after a lapse of more than one year at ambient temperature (shorter time at high temperatures), treat with voltage as needed. In design of equipment, consider the effect of increase in initial current, and install protective circuits as needed.

Please check that recommended voltage treatment conditions are provided for each series.

- Do not store capacitors in an environment directly exposed to water, saltwater spray, oil spill or condensation.
- Do not store capacitors in an environment filled with toxic gas such as hydrogen sulfide, sulfurous acid, nitrous acid, chlorine, ammonia, etc.
- Do not store capacitors in a place exposed to ozone, ultraviolet rays, or radiation.

#### 6. Please take the following actions when disposing of Conductive Polymer Hybrid Aluminum Electrolytic Capacitors, Solid Conductive Polymer Aluminum Electrolytic Capacitors.

- Entrust to specialists of industrial waste treatment for incineration.

#### 7. Others

- Before using capacitors, check the details of the specification and catalog as well as the following.

Technical Report of Japan Electronics and Information Technology Industries Association

EIAJ RCR-2367

Guideline of notabilia for fixed aluminum electrolytic capacitors for use in electronic equipment



■ Product Code System


H, B, P

The Elna product code is Max.20 digits.

Example) HV1 series 6.3V 220μF φ6.3x5.8L

New product code  
RSHV1221M1JDC8002E

Old product code  
HV-6V221MF61E-R2

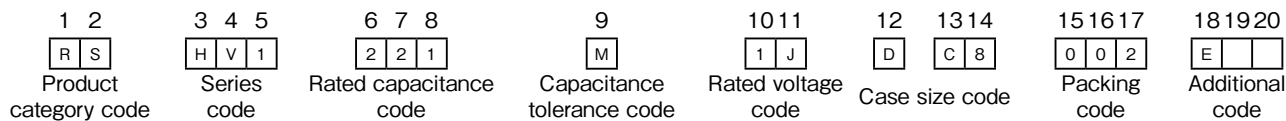

1 Product group

R : Energy devices  
(Electrolytic capacitor)

2 Category

- S : For general
- \* A : For automotive (powertrain, safety)
- \* C : For automotive (body, info)
- M : For medical  
(international classification III)
- L : For medical  
(international classification I, II)

\* AEC-Q200 Qualified.

3-5 Series code

old code	New code
HV	HV1
HT	HT1
HVK	HVK
HTK	HTK
HVX	HVX
HTX	HTX
HVQ	HVQ
HTQ	HTQ

HR	BR1
HRK	BRK

PVX	PVX
PVM	PVM
PVK	PVK

9 Capacitance tolerance code

Example

Tolerance (%)	Code
±10	K
±20	M
0 to +30	A
-10 to +30	Q
-10 to +50	T

10-11 Rated voltage code

voltage (V)	Code
2.5	1P
4	1A
6.3	1J
10	1L
16	1E
25	1T
35	1G
50	1U
63	4E
80	1R
100	1H

12 Diameter code

SMD type

D (mm)	Code
5	C
6.3	D
8	E
10	F
12.5	G

04 type

D (mm)	Code
10	F

13-14 Length code

SMD type

L (mm)	Code
5.7	C7
5.8	C8
7.7	E7
8.7	F7
10	H0
12.5	K5
13.5	L5

04 type

L (mm)	Code
10	10
12.5	12

6-8 Rated capacitance code

The code denoting nominal capacitance shall consist of three numerals.

The first and second numerals shall represent the significant figures of nominal capacitance in the unit of microfarad (μF), And the third numeral shall represent the number of zeros following the significant figures.

Example

Rated capacitance (μF)	Code
0.1	R10
1	010
2.2	2R2
33	330
100	101
2200	222
33000	333
470000	474

15-17 Packing code (SMD type: Reel taping)

Old code	New code		Case size φD (mm)	Reel material
	Hybrid	Solid		
R	001	015	φ 10 or less	Paper
R2	002	016	φ 10 or less	Polystyrene
R5	005	019	φ 12.5 or more	Polystyrene

\* Please contact us for special packaging.

Packing code (04 type)

Lead long	Standard packing	Old code	New code
	Taping		
		T2	100

18-20 Additional code

Example

Code	Contents
T	Sn 100% plated

\* Please contact us for details.

## Conductive Polymer Hybrid Capacitors


GREEN CAP

SMD

Low ESR

105°C  
10000hours

- Low ESR and high ripple current are realized.
- HT1 is resist to vibration. (30G guaranteed)
- Equivalent to conductive polymer type Aluminum Electrolytic Capacitor. (There are little characteristics change by temperature and frequency)
- Guaranteed 105°C, 10000 hours.



Marking color : Blue print

### Specifications

Item	Performance																				
Category temperature range (°C)	-55~+105																				
Tolerance at rated capacitance (%)	±20 (20°C, 120Hz)																				
Leakage current (µA) (max.)	6.3V to 80V : 0.01CV or 3 whichever is larger (after 2 minutes) 100V : 0.05CV or 15 whichever is larger (after 2 minutes), : Rated capacitance (µF) ; V : Rated voltage (V) (20°C)																				
Tangent of loss angle (tanδ)	<table border="1"> <thead> <tr> <th>Rated voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>80</th> <th>100</th> </tr> </thead> <tbody> <tr> <td>tanδ (max.)</td> <td>0.20</td> <td>0.18</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> <td>0.08</td> <td>0.08</td> <td>0.08</td> </tr> </tbody> </table> <p>(20°C, 120Hz)</p>	Rated voltage (V)	6.3	10	16	25	35	50	63	80	100	tanδ (max.)	0.20	0.18	0.16	0.14	0.12	0.10	0.08	0.08	0.08
Rated voltage (V)	6.3	10	16	25	35	50	63	80	100												
tanδ (max.)	0.20	0.18	0.16	0.14	0.12	0.10	0.08	0.08	0.08												
Characteristics at high and low temperature	<table border="1"> <thead> <tr> <th>Impedance ratio (max.)</th> <th>Z-25°C/Z+20°C</th> <th>1.5</th> </tr> </thead> <tbody> <tr> <td></td> <th>Z-55°C/Z+20°C</th> <td>2.0</td> </tr> </tbody> </table> <p>(100kHz)</p>	Impedance ratio (max.)	Z-25°C/Z+20°C	1.5		Z-55°C/Z+20°C	2.0														
Impedance ratio (max.)	Z-25°C/Z+20°C	1.5																			
	Z-55°C/Z+20°C	2.0																			
Endurance (105°C) (Applied ripple current)	<table border="1"> <tbody> <tr> <td>Test time</td> <td>10000 hours</td> </tr> <tr> <td>Leakage current</td> <td>The initial specified value or less</td> </tr> <tr> <td>Percentage of capacitance change</td> <td>Within ±30% of initial value</td> </tr> <tr> <td>Tangent of the loss angle</td> <td>200% or less of the initial specified value</td> </tr> <tr> <td>ESR change</td> <td>200% or less of the initial specified value</td> </tr> </tbody> </table>	Test time	10000 hours	Leakage current	The initial specified value or less	Percentage of capacitance change	Within ±30% of initial value	Tangent of the loss angle	200% or less of the initial specified value	ESR change	200% or less of the initial specified value										
Test time	10000 hours																				
Leakage current	The initial specified value or less																				
Percentage of capacitance change	Within ±30% of initial value																				
Tangent of the loss angle	200% or less of the initial specified value																				
ESR change	200% or less of the initial specified value																				
Shelf life (105°C)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1.																				

### Outline Drawing

Unit : mm

#### HV1 series

#### HT1 series

( ) : Reference size

φD	L	A	B	C	M	W	P	Size code
5	5.8±0.3	5.3	5.3	2.3	0.4±0.2	0.5 to 0.8	1.5	CC8
6.3	5.8±0.3	6.6	6.6	2.7	0.4±0.2	0.5 to 0.8	2.0	DC8
6.3	7.7±0.3	6.6	6.6	2.7	0.4±0.2	0.5 to 0.8	2.0	DE7
8	8.7±0.3	8.4	8.4	3.0	0.4±0.2	0.5 to 0.8	3.1	EF7
8	10±0.5	8.4	8.4	3.0	0.4±0.2	0.7 to 1.1	3.1	EH0
10	8.7±0.3	10.4	10.4	3.3	0.4±0.2	0.7 to 1.1	4.7	FF7
10	10±0.5	10.4	10.4	3.3	0.4±0.2	0.7 to 1.1	4.7	FH0
10	12.5±0.5	10.4	10.4	3.3	0.4±0.2	0.7 to 1.1	4.7	FK5
12.5	13.5±0.5	13.0	13.0	4.9	0.7±0.3	1.0 to 1.4	4.6	GL5

φD	L	A	B	C	M	W	P	Size code
6.3	5.8±0.3	6.6	6.6	2.7	0.4±0.2	0.5 to 0.8	2.0	DC8
6.3	7.7±0.3	6.6	6.6	2.7	0.4±0.2	0.5 to 0.8	2.0	DE7
8	10±0.5	8.4	8.4	3.0	0.4±0.2	0.7 to 1.1	3.1	EH0
10	10±0.5	10.4	10.4	3.3	0.4±0.2	0.7 to 1.1	4.7	FH0
10	12.5±0.5	10.4	10.4	3.3	0.4±0.2	0.7 to 1.1	4.7	FK5
12.5	13.5±0.5	13.0	13.0	4.9	0.7±0.3	1.0 to 1.4	4.6	GL5

( ) : Reference size

Refer to individual page (Soldering conditions, Land pattern size, The taping specifications).

### Coefficient of Frequency for Rated Ripple Current

Frequency (Hz)	120	1k	10k	100k or more
Rated voltage (V)	0.10	0.30	0.60	1

### Product code system (\*For general product)

HV1 (example : 35V270µF)

RS*	HV1	271	M	1G	FH0	□	E
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Taping and packing code	Additional code

HT1 (example : 35V270µF)

RS*	HT1	271	M	1G	FH0	□	E
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Taping and packing code	Additional code

For details, refer to the various "Product Code System" pages.

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

### HV1 series Standard Ratings

Rated voltage (V) Case φ D×L (mm)	Item	6.3 (1J)			10 (1L)			16 (1E)			25 (1T)		
		Rated capacitance (μF)	ESR (mΩ max.)	Rated ripple current (mA <sub>rms</sub> )	Rated capacitance (μF)	ESR (mΩ max.)	Rated ripple current (mA <sub>rms</sub> )	Rated capacitance (μF)	ESR (mΩ max.)	Rated ripple current (mA <sub>rms</sub> )	Rated capacitance (μF)	ESR (mΩ max.)	Rated ripple current (mA <sub>rms</sub> )
5×5.8	—	—	—	—	—	—	—	47	80	900	33	80	900
6.3×5.8	220	45	1600	100	45	1600	82	45	1600	56	50	1300	
6.3×7.7	330	24	2300	220	24	2300	150	27	2200	100	30	2000	
8×8.7	—	—	—	—	—	—	—	—	—	—	150	27	2100
8×10	560	22	2500	330	22	2500	270	22	2500	220	27	2300	
10×8.7	—	—	—	—	—	—	—	—	—	—	270	25	2400
10×10	820	18	2600	470	18	2600	470	18	2600	330	20	2500	
10×12.5	—	—	—	—	—	—	—	—	—	—	560	18	3500
12.5×13.5	—	—	—	—	—	—	—	—	—	—	820	15	4000

Rated voltage (V) Case φ D×L (mm)	Item	35 (1G)			50 (1U)			63 (4E)		
		Rated capacitance (μF)	ESR (mΩ max.)	Rated ripple current (mA <sub>rms</sub> )	Rated capacitance (μF)	ESR (mΩ max.)	Rated ripple current (mA <sub>rms</sub> )	Rated capacitance (μF)	ESR (mΩ max.)	Rated ripple current (mA <sub>rms</sub> )
5×5.8	22	100	900	10	120	750	—	—	—	
6.3×5.8	47	60	1300	22	80	1100	10	120	1000	
6.3×7.7	68	35	2000	33	40	1600	22	80	1500	
8×8.7	100	30	2100	47	35	1700	27	50	1600	
8×10	150	27	2300	68	30	1800	33	40	1600	
10×8.7	220	25	2400	82	28	1900	47	35	1700	
10×10	270	20	2500	100	28	2000	56	30	1800	
10×12.5	390	18	3500	150	24	3000	100	26	2500	
12.5×13.5	560	15	4000	330	20	3600	120	22	3000	

Rated voltage (V) Case φ D×L (mm)	Item	80 (1R)			100 (1H)		
		Rated capacitance (μF)	ESR (mΩ max.)	Rated ripple current (mA <sub>rms</sub> )	Rated capacitance (μF)	ESR (mΩ max.)	Rated ripple current (mA <sub>rms</sub> )
8×10	22	45	1550	—	—	—	
10×10	33	36	1700	15	45	1600	

(Note) Rated ripple current : 105°C , 100kHz ; ESR : 20°C , 100kHz

### HT1 series Standard Ratings

Rated voltage (V) Case φ D×L (mm)	Item	6.3 (1J)			10 (1L)			16 (1E)			25 (1T)		
		Rated capacitance (μF)	ESR (mΩ max.)	Rated ripple current (mA <sub>rms</sub> )	Rated capacitance (μF)	ESR (mΩ max.)	Rated ripple current (mA <sub>rms</sub> )	Rated capacitance (μF)	ESR (mΩ max.)	Rated ripple current (mA <sub>rms</sub> )	Rated capacitance (μF)	ESR (mΩ max.)	Rated ripple current (mA <sub>rms</sub> )
6.3×5.8	220	45	1600	100	45	1600	82	45	1600	56	50	1300	
6.3×7.7	330	24	2300	220	24	2300	150	27	2200	100	30	2000	
8×10	560	22	2500	330	22	2500	270	22	2500	220	27	2300	
10×10	820	18	2600	470	18	2600	470	18	2600	330	20	2500	
10×12.5	—	—	—	—	—	—	—	—	—	—	560	18	3500
12.5×13.5	—	—	—	—	—	—	—	—	—	—	820	15	4000

Rated voltage (V) Case φ D×L (mm)	Item	35 (1G)			50 (1U)			63 (4E)		
		Rated capacitance (μF)	ESR (mΩ max.)	Rated ripple current (mA <sub>rms</sub> )	Rated capacitance (μF)	ESR (mΩ max.)	Rated ripple current (mA <sub>rms</sub> )	Rated capacitance (μF)	ESR (mΩ max.)	Rated ripple current (mA <sub>rms</sub> )
6.3×5.8	47	60	1300	22	80	1100	10	120	1000	
6.3×7.7	68	35	2000	33	40	1600	22	80	1500	
8×10	150	27	2300	68	30	1800	33	40	1600	
10×10	270	20	2500	100	28	2000	56	30	1800	
10×12.5	390	18	3500	150	24	3000	100	26	2500	
12.5×13.5	560	15	4000	330	20	3600	120	22	3000	

Rated voltage (V) Case φ D×L (mm)	Item	80 (1R)			100 (1H)		
		Rated capacitance (μF)	ESR (mΩ max.)	Rated ripple current (mA <sub>rms</sub> )	Rated capacitance (μF)	ESR (mΩ max.)	Rated ripple current (mA <sub>rms</sub> )
8×10	22	45	1550	—	—	—	
10×10	33	36	1700	15	45	1600	

(Note) Rated ripple current : 105°C , 100kHz ; ESR : 20°C , 100kHz

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

## Conductive Polymer Hybrid Capacitors

GREEN CAP

SMD

Low ESR

125°C  
4000hours

125°C  
6000hours

- Low ESR and high ripple current are realized.
- HTK is resist to vibration. (30G guaranteed)
- Equivalent to conductive polymer type Aluminum Electrolytic Capacitor. (There are little characteristics change by temperature and frequency)



4000h

Vibration resistance High temperature



6000h

Long life



Marking color : Blue print

### Specifications

Item	Performance																				
Category temperature range (°C)	-55~+125																				
Tolerance at rated capacitance (%)	±20 (20°C, 120Hz)																				
Leakage current (µA) (max.)	6.3V to 80V : 0.01CV or 3 whichever is larger (after 2 minutes) 100V : 0.05CV or 15 whichever is larger (after 2 minutes), : Rated capacitance (µF) ; V : Rated voltage (V) (20°C)																				
Tangent of loss angle (tanδ)	<table border="1"> <thead> <tr> <th>Rated voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>80</th> <th>100</th> </tr> </thead> <tbody> <tr> <td>tanδ (max.)</td> <td>0.20</td> <td>0.18</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> <td>0.08</td> <td>0.08</td> <td>0.08</td> </tr> </tbody> </table> <p>(20°C, 120Hz)</p>	Rated voltage (V)	6.3	10	16	25	35	50	63	80	100	tanδ (max.)	0.20	0.18	0.16	0.14	0.12	0.10	0.08	0.08	0.08
Rated voltage (V)	6.3	10	16	25	35	50	63	80	100												
tanδ (max.)	0.20	0.18	0.16	0.14	0.12	0.10	0.08	0.08	0.08												
Characteristics at high and low temperature	<table border="1"> <thead> <tr> <th>Impedance ratio (max.)</th> <th>Z-25°C/Z+20°C</th> <th>1.5</th> </tr> </thead> <tbody> <tr> <td></td> <th>Z-55°C/Z+20°C</th> <td>2.0</td> </tr> </tbody> </table> <p>(100kHz)</p>	Impedance ratio (max.)	Z-25°C/Z+20°C	1.5		Z-55°C/Z+20°C	2.0														
Impedance ratio (max.)	Z-25°C/Z+20°C	1.5																			
	Z-55°C/Z+20°C	2.0																			
Endurance (125°C) (Applied ripple current)	<table border="1"> <thead> <tr> <th>Test time</th> <th>4000 hours</th> <th>6000 hours (25V~63V : φ6.3 or more)</th> </tr> </thead> <tbody> <tr> <td>Leakage current</td> <td>The initial specified value or less</td> <td>The initial specified value or less</td> </tr> <tr> <td>Percentage of capacitance change</td> <td>Within ±30% of initial value</td> <td>Within ±30% of initial value</td> </tr> <tr> <td>Tangent of the loss angle</td> <td>200% or less of the initial specified value</td> <td>200% or less of the initial specified value</td> </tr> <tr> <td>ESR change</td> <td>200% or less of the initial specified value</td> <td>200% or less of the initial specified value</td> </tr> </tbody> </table>	Test time	4000 hours	6000 hours (25V~63V : φ6.3 or more)	Leakage current	The initial specified value or less	The initial specified value or less	Percentage of capacitance change	Within ±30% of initial value	Within ±30% of initial value	Tangent of the loss angle	200% or less of the initial specified value	200% or less of the initial specified value	ESR change	200% or less of the initial specified value	200% or less of the initial specified value					
Test time	4000 hours	6000 hours (25V~63V : φ6.3 or more)																			
Leakage current	The initial specified value or less	The initial specified value or less																			
Percentage of capacitance change	Within ±30% of initial value	Within ±30% of initial value																			
Tangent of the loss angle	200% or less of the initial specified value	200% or less of the initial specified value																			
ESR change	200% or less of the initial specified value	200% or less of the initial specified value																			
Shelf life (125°C)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1.																				

### Outline Drawing

Unit : mm

#### Series HVK

φD	L	A	B	C	M	W	P	Size code
5	5.8±0.3	5.3	5.3	2.3	0.4±0.2	0.5 to 0.8	1.5	CC8
6.3	5.8±0.3	6.6	6.6	2.7	0.4±0.2	0.5 to 0.8	2.0	DC8
6.3	7.7±0.3	6.6	6.6	2.7	0.4±0.2	0.5 to 0.8	2.0	DE7
8	8.7±0.3	8.4	8.4	3.0	0.4±0.2	0.5 to 0.8	3.1	EF7
8	10±0.5	8.4	8.4	3.0	0.4±0.2	0.7 to 1.1	3.1	EH0
10	8.7±0.3	10.4	10.4	3.3	0.4±0.2	0.7 to 1.1	4.7	FF7
10	10±0.5	10.4	10.4	3.3	0.4±0.2	0.7 to 1.1	4.7	FH0
10	12.5±0.5	10.4	10.4	3.3	0.4±0.2	0.7 to 1.1	4.7	FK5
12.5	13.5±0.5	13.0	13.0	4.9	0.7±0.3	1.0 to 1.4	4.6	GL5

( ) : Reference size

#### Series HTK

φD	L	A	B	C	M	W	P	Size code
6.3	5.8±0.3	6.6	6.6	2.7	0.4±0.2	0.5 to 0.8	2.0	DC8
6.3	7.7±0.3	6.6	6.6	2.7	0.4±0.2	0.5 to 0.8	2.0	DE7
8	10±0.5	8.4	8.4	3.0	0.4±0.2	0.7 to 1.1	3.1	EH0
10	10±0.5	10.4	10.4	3.3	0.4±0.2	0.7 to 1.1	4.7	FH0
10	12.5±0.5	10.4	10.4	3.3	0.4±0.2	0.7 to 1.1	4.7	FK5
12.5	13.5±0.5	13.0	13.0	4.9	0.7±0.3	1.0 to 1.4	4.6	GL5

( ) : Reference size

□ : Dummy terminal

Refer to individual page.

(Soldering conditions, Land pattern size, The taping specifications)

### Coefficient of Frequency for Rated Ripple Current

Frequency (Hz)	120	1k	10k	100k or more
Rated voltage (V)				
6.3 to 100	0.10	0.30	0.60	1

#### 4000 hours guaranteed: Product code system (\*For general product)

HVK (example : 16V470µF)

RS*	HVK	471	M	1E	FH0	□	E
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Taping and packing code	Additional code

HTK (example : 63V56µF)

RS*	HTK	560	M	4E	FH0	□	E
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Taping and packing code	Additional code

#### 6000 hours guaranteed: Product code system (\*For general product)

HVK-B (example : 25V100µF)

RS*	HVK	101	M	1T	DE7	□	B
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Taping and packing code	Additional code

HTK-B (example : 25V100µF)

RS*	HTK	101	M	1T	DE7	□	B
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Taping and packing code	Additional code

For details, refer to the various "Product Code System" pages.

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

### HVK series Standard Ratings (●Marked: 6000 hours guaranteed)

Rated voltage (V) Case φ D × L (mm)	Item	6.3 (1J)			10 (1L)			16 (1E)			25 (1T)		
		Rated capacitance (μF)	ESR (mΩ max.)	Rated ripple current (mA <sub>rms</sub> )	Rated capacitance (μF)	ESR (mΩ max.)	Rated ripple current (mA <sub>rms</sub> )	Rated capacitance (μF)	ESR (mΩ max.)	Rated ripple current (mA <sub>rms</sub> )	Rated capacitance (μF)	ESR (mΩ max.)	Rated ripple current (mA <sub>rms</sub> )
5×5.8		—	—	—	—	—	—	47	70	600	33	80	550
6.3×5.8		220	45	950	100	45	950	82	45	950	● 56	50	900
6.3×7.7		330	24	1450	220	24	1450	150	27	1450	● 100	30	1400
8×8.7		—	—	—	—	—	—	—	—	—	● 150	27	1500
8×10		560	22	1700	330	22	1700	270	22	1700	● 220	27	1600
10×8.7		—	—	—	—	—	—	—	—	—	● 270	25	1700
10×10		820	18	2100	470	18	2100	470	18	2100	● 330	20	2000
10×12.5		—	—	—	—	—	—	—	—	—	● 560	18	3000
12.5×13.5		—	—	—	—	—	—	—	—	—	● 820	15	3500

Rated voltage (V) Case φ D × L (mm)	Item	35 (1G)			50 (1U)			63 (4E)		
		Rated capacitance (μF)	ESR (mΩ max.)	Rated ripple current (mA <sub>rms</sub> )	Rated capacitance (μF)	ESR (mΩ max.)	Rated ripple current (mA <sub>rms</sub> )	Rated capacitance (μF)	ESR (mΩ max.)	Rated ripple current (mA <sub>rms</sub> )
5×5.8		22	100	550	10	120	500	—	—	—
6.3×5.8		● 47	60	900	● 22	80	750	● 10	120	700
6.3×7.7		● 68	35	1400	● 33	40	1100	● 22	80	900
8×8.7		● 100	30	1500	● 47	35	1200	● 27	50	1000
8×10		● 150	27	1600	● 68	30	1250	● 33	40	1100
10×8.7		● 220	25	1700	● 82	28	1400	● 47	35	1200
10×10		● 270	20	2000	● 100	28	1600	● 56	30	1400
10×12.5		● 390	18	3000	● 150	24	2500	● 100	26	2000
12.5×13.5		● 560	15	3500	● 330	20	3000	● 120	22	2500

Rated voltage (V) Case φ D × L (mm)	Item	80 (1R)			100 (1H)		
		Rated capacitance (μF)	ESR (mΩ max.)	Rated ripple current (mA <sub>rms</sub> )	Rated capacitance (μF)	ESR (mΩ max.)	Rated ripple current (mA <sub>rms</sub> )
8×10		22	45	1100	—	—	—
10×10		33	36	1200	15	45	1000

(Note) Rated ripple current : 125°C , 100kHz ; ESR : 20°C , 100kHz

### HTK series Standard Ratings (●Marked: 6000 hours guaranteed)

Rated voltage (V) Case φ D × L (mm)	Item	6.3 (1J)			10 (1L)			16 (1E)			25 (1T)		
		Rated capacitance (μF)	ESR (mΩ max.)	Rated ripple current (mA <sub>rms</sub> )	Rated capacitance (μF)	ESR (mΩ max.)	Rated ripple current (mA <sub>rms</sub> )	Rated capacitance (μF)	ESR (mΩ max.)	Rated ripple current (mA <sub>rms</sub> )	Rated capacitance (μF)	ESR (mΩ max.)	Rated ripple current (mA <sub>rms</sub> )
6.3×5.8		220	45	950	100	45	950	82	45	950	● 56	50	900
6.3×7.7		330	24	1450	220	24	1450	150	27	1450	● 100	30	1400
8×10		560	22	1700	330	22	1700	270	22	1700	● 220	27	1600
10×10		820	18	2100	470	18	2100	470	18	2100	● 330	20	2000
10×12.5		—	—	—	—	—	—	—	—	—	● 560	18	3000
12.5×13.5		—	—	—	—	—	—	—	—	—	● 820	15	3500

Rated voltage (V) Case φ D × L (mm)	Item	35 (1G)			50 (1U)			63 (4E)		
		Rated capacitance (μF)	ESR (mΩ max.)	Rated ripple current (mA <sub>rms</sub> )	Rated capacitance (μF)	ESR (mΩ max.)	Rated ripple current (mA <sub>rms</sub> )	Rated capacitance (μF)	ESR (mΩ max.)	Rated ripple current (mA <sub>rms</sub> )
6.3×5.8		● 47	60	900	● 22	80	750	● 10	120	700
6.3×7.7		● 68	35	1400	● 33	40	1100	● 22	80	900
8×10		● 150	27	1600	● 68	30	1250	● 33	40	1100
10×10		● 270	20	2000	● 100	28	1600	● 56	30	1400
10×12.5		● 390	18	3000	● 150	24	2500	● 100	26	2000
12.5×13.5		● 560	15	3500	● 330	20	3000	● 120	22	2500

Rated voltage (V) Case φ D × L (mm)	Item	80 (1R)			100 (1H)		
		Rated capacitance (μF)	ESR (mΩ max.)	Rated ripple current (mA <sub>rms</sub> )	Rated capacitance (μF)	ESR (mΩ max.)	Rated ripple current (mA <sub>rms</sub> )
8×10		22	45	1100	—	—	—
10×10		33	36	1200	15	45	1000

(Note) Rated ripple current : 125°C , 100kHz ; ESR : 20°C , 100kHz

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

## Conductive Polymer Hybrid Capacitors


GREEN CAP

SMD

Low ESR

135°C  
4000hours

- Low ESR and high ripple current are realized.
- HTX is resist to vibration. (30G guaranteed)
- Equivalent to conductive polymer type Aluminum Electrolytic Capacitor. (There are little characteristics change by temperature and frequency)
- Guaranteed 135°C, 4000 hours.( $\phi$  6.3: 2000 hours)

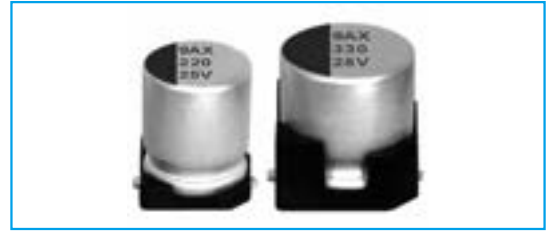

Marking color : Blue print



### Specifications

Item	Performance												
Category temperature range (°C)	-55~+135												
Tolerance at rated capacitance (%)	$\pm 20$ (20°C, 120Hz)												
Leakage current ( $\mu$ A) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance ( $\mu$ F) , V : Rated voltage (V) (20°C)												
Tangent of loss angle ( $\tan\delta$ )	<table border="1"> <tr> <td>Rated voltage (V)</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> </tr> <tr> <td><math>\tan\delta</math> (max.)</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> <td>0.08</td> </tr> </table> (20°C, 120Hz)	Rated voltage (V)	16	25	35	50	63	$\tan\delta$ (max.)	0.16	0.14	0.12	0.10	0.08
Rated voltage (V)	16	25	35	50	63								
$\tan\delta$ (max.)	0.16	0.14	0.12	0.10	0.08								
Characteristics at high and low temperature	<table border="1"> <tr> <td>Impedance ratio (max.)</td> <td>Z-25°C/Z+20°C</td> <td>1.5</td> </tr> <tr> <td></td> <td>Z-55°C/Z+20°C</td> <td>2.0</td> </tr> </table> (100kHz)	Impedance ratio (max.)	Z-25°C/Z+20°C	1.5		Z-55°C/Z+20°C	2.0						
Impedance ratio (max.)	Z-25°C/Z+20°C	1.5											
	Z-55°C/Z+20°C	2.0											
Endurance (135°C) (Applied ripple current)	<table border="1"> <tr> <td>Test time</td> <td>4000 hours(<math>\phi</math>6.3: 2000 hours)</td> </tr> <tr> <td>Leakage current</td> <td>The initial specified value or less</td> </tr> <tr> <td>Percentage of capacitance change</td> <td>Within <math>\pm 30\%</math> of initial value</td> </tr> <tr> <td>Tangent of the loss angle</td> <td>200% or less of the initial specified value</td> </tr> <tr> <td>ESR change</td> <td>200% or less of the initial specified value</td> </tr> </table>	Test time	4000 hours( $\phi$ 6.3: 2000 hours)	Leakage current	The initial specified value or less	Percentage of capacitance change	Within $\pm 30\%$ of initial value	Tangent of the loss angle	200% or less of the initial specified value	ESR change	200% or less of the initial specified value		
Test time	4000 hours( $\phi$ 6.3: 2000 hours)												
Leakage current	The initial specified value or less												
Percentage of capacitance change	Within $\pm 30\%$ of initial value												
Tangent of the loss angle	200% or less of the initial specified value												
ESR change	200% or less of the initial specified value												
Shelf life (135°C)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1.												

### Outline Drawing

Unit : mm

#### Series HVX

$\phi D$	L	A	B	C	W	P	Size code
6.3	5.8 $\pm$ 0.3	6.6	6.6	2.7	0.5 to 0.8	2.0	DC8
6.3	7.7 $\pm$ 0.3	6.6	6.6	2.7	0.5 to 0.8	2.0	DE7
8	10 $\pm$ 0.5	8.4	8.4	3.0	0.7 to 1.1	3.1	EH0
10	10 $\pm$ 0.5	10.4	10.4	3.3	0.7 to 1.1	4.7	FH0
10	12.5 $\pm$ 0.5	10.4	10.4	3.3	0.7 to 1.1	4.7	FK5

(●Marked:2000 hours guaranteed)

#### Series HTX

$\phi D$	L	A	B	C	W	P	Size code
6.3	5.8 $\pm$ 0.3	6.6	6.6	2.7	0.5 to 0.8	2.0	DC8
6.3	7.7 $\pm$ 0.3	6.6	6.6	2.7	0.5 to 0.8	2.0	DE7
8	10 $\pm$ 0.5	8.4	8.4	3.0	0.7 to 1.1	3.1	EH0
10	10 $\pm$ 0.5	10.4	10.4	3.3	0.7 to 1.1	4.7	FH0
10	12.5 $\pm$ 0.5	10.4	10.4	3.3	0.7 to 1.1	4.7	FK5

Refer to individual page (Soldering conditions, Land pattern size, The taping specifications).

### Coefficient of Frequency for Rated Ripple Current

Frequency (Hz)	120	1k	10k	100k or more
Rated voltage (V)	0.10	0.30	0.60	1

### Product code system (\*For general product)

HVX (example : 16V270 $\mu$ F)

RS*	HVX	271	M	1E	EHO		
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Taping and packing code	Additional code

HTX (example : 16V270 $\mu$ F)

RS*	HTX	271	M	1E	EHO		
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Taping and packing code	Additional code

For details, refer to the various "Product Code System" pages.

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

### Standard Ratings (●Marked: 2000 hours guaranteed)

Rated voltage (V) Rated capacitance (μF)	Item	16 (1E)			25 (1T)			35 (1G)			50 (1U)		
		Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mA rms)	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mA rms)	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mA rms)	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mA rms)
22	—	—	—	—	—	—	—	—	—	—	● 6.3×5.8	80	750
33	—	—	—	—	—	—	—	—	—	—	● 6.3×7.7	40	1100
47	—	—	—	—	—	—	—	● 6.3×5.8	60	900	—	—	—
56	—	—	—	—	● 6.3×5.8	50	900	—	—	—	—	—	—
68	—	—	—	—	—	—	—	● 6.3×7.7	35	1400	8×10	30	1250
82	● 6.3×5.8	45	950	—	—	—	—	—	—	—	—	—	—
100	—	—	—	—	● 6.3×7.7	30	1400	—	—	—	10×10	28	1600
150	● 6.3×7.7	27	1450	—	—	—	—	8×10	22	1600	10×12.5	24	2500
220	—	—	—	8×10	22	1600	—	—	—	—	—	—	—
270	—	8×10	20	1700	—	—	—	10×10	20	2000	—	—	—
330	—	—	—	—	10×10	20	2000	—	—	—	—	—	—
390	—	—	—	—	—	—	—	10×12.5	18	3000	—	—	—
470	—	10×10	18	2100	—	—	—	—	—	—	—	—	—
560	—	—	—	—	10×12.5	18	3000	—	—	—	—	—	—

Rated voltage (V) Rated capacitance (μF)	Item	63 (4E)		
		Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mA rms)
10	● 6.3×5.8	120	700	
22	● 6.3×7.7	80	900	
33	8×10	40	1100	
56	10×10	30	1400	
100	10×12.5	26	2000	

(Note) Rated ripple current : 135°C , 100kHz ; ESR : 20°C , 100kHz

## Conductive Polymer Hybrid Capacitors


GREEN CAP

SMD


Low ESR

150°C  
1000hours

- Low ESR and high ripple current are realized.
- HTQ is resist to vibration. (30G guaranteed)
- Equivalent to conductive polymer type Aluminum Electrolytic Capacitor. (There are little characteristics change by temperature and frequency)
- Guaranteed 150° C, 1000 hours.

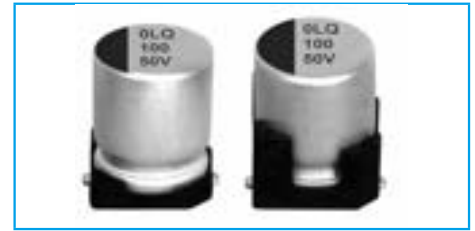

Marking color : Blue print




### Specifications

Item	Performance												
Category temperature range (°C)	-55 to +150												
Tolerance at rated capacitance (%)	±20 (20°C, 120Hz)												
Leakage current (µA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (µF) ; V : Rated voltage (V) (20°C)												
Tangent of loss angle (tan δ)	<table border="1"> <thead> <tr> <th>Rated voltage (V)</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> </tr> </thead> <tbody> <tr> <td>tan δ (max.)</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> <td>0.08</td> </tr> </tbody> </table> (20°C, 120Hz)	Rated voltage (V)	16	25	35	50	63	tan δ (max.)	0.16	0.14	0.12	0.10	0.08
Rated voltage (V)	16	25	35	50	63								
tan δ (max.)	0.16	0.14	0.12	0.10	0.08								
Characteristics at high and low temperature	Impedance ratio (max.) <table border="1"> <tbody> <tr> <td>Z-25°C / Z+20°C</td> <td>1.5</td> </tr> <tr> <td>Z-55°C / Z+20°C</td> <td>2.0</td> </tr> </tbody> </table> (100Hz)	Z-25°C / Z+20°C	1.5	Z-55°C / Z+20°C	2.0								
Z-25°C / Z+20°C	1.5												
Z-55°C / Z+20°C	2.0												
Endurance (150°C) (Applied ripple current)	<table border="1"> <tbody> <tr> <td>Test time</td> <td>1000 hours</td> </tr> <tr> <td>Leakage current</td> <td>The initial specified value or less</td> </tr> <tr> <td>Percentage of capacitance change</td> <td>Within ±30% of initial value</td> </tr> <tr> <td>Tangent of the loss angle</td> <td>200% or less of the initial specified value</td> </tr> <tr> <td>ESR change</td> <td>200% or less of the initial specified value</td> </tr> </tbody> </table>	Test time	1000 hours	Leakage current	The initial specified value or less	Percentage of capacitance change	Within ±30% of initial value	Tangent of the loss angle	200% or less of the initial specified value	ESR change	200% or less of the initial specified value		
Test time	1000 hours												
Leakage current	The initial specified value or less												
Percentage of capacitance change	Within ±30% of initial value												
Tangent of the loss angle	200% or less of the initial specified value												
ESR change	200% or less of the initial specified value												
Shelf life (150°C)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1.												

### Outline Drawing

Unit : mm

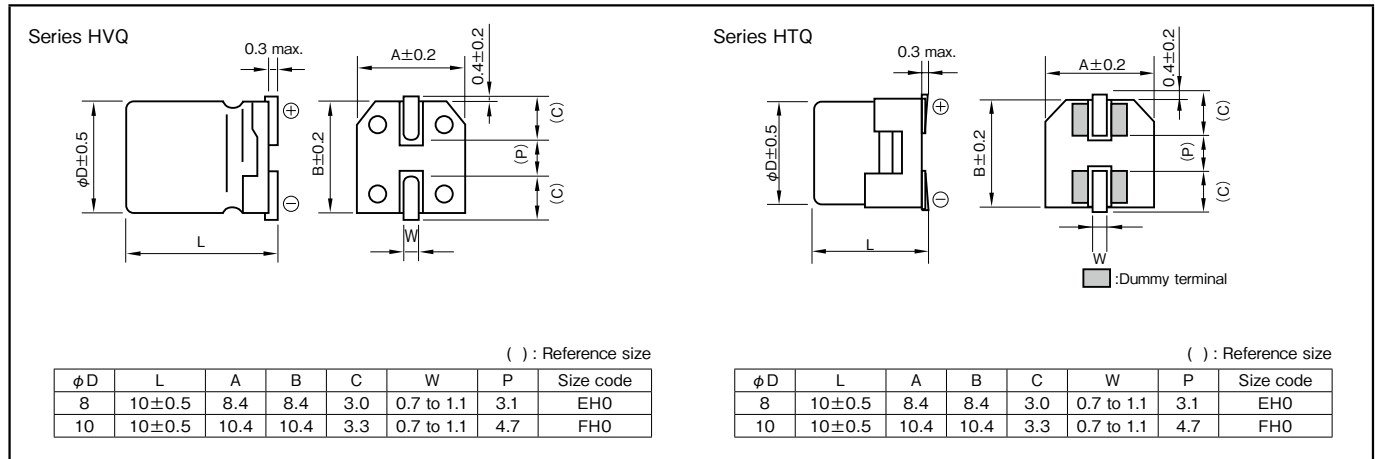

Refer to individual page. (Soldering conditions, Land pattern size, The taping specifications)

### Coefficient of Frequency for Rated Ripple Current

Frequency (Hz)	120	1k	10k	100k or more
Rated voltage (V)	0.10	0.30	0.60	1
16 to 63				

### Product code system (\*For general product)

HVQ (example : 16V270µF)

RS*	HVQ	271	M	1E	EHO		
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Taping and packing code	Additional code

HTQ (example : 16V270µF)

RS*	HTQ	271	M	1E	EHO		
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Taping and packing code	Additional code

For details, refer to the various "Product Code System" pages.

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.



## Standard Ratings

Rated voltage (V) Rated capacitance (μF)	16 (1L)			25 (1T)			35 (1G)			50 (1U)		
	Item Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mA rms)	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mA rms)	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mA rms)	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mA rms)
68	—	—	—	—	—	—	—	—	—	8×10	30	660
100	—	—	—	—	—	—	—	—	—	10×10	28	800
150	—	—	—	—	—	—	8×10	22	710	—	—	—
220	—	—	—	8×10	22	740	—	—	—	—	—	—
270	8×10	20	740	—	—	—	10×10	20	830	—	—	—
330	—	—	—	10×10	20	850	—	—	—	—	—	—
470	10×10	18	850	—	—	—	—	—	—	—	—	—

Rated voltage (V) Rated capacitance (μF)	63 (4E)		
	Item Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mA rms)
33	8×10	30	610
56	10×10	28	710

(Note) Rated ripple current : 150°C , 100kHz ; ESR : 20°C , 100kHz

## Hybrid Capacitors radial lead type

GREEN CAP

Low ESR


105°C  
10000hours

125°C  
6000hours

- Low ESR and high ripple current are realized.
- Equivalent to conductive polymer type Aluminum Electrolytic Capacitor.
- BR1 series : Guaranteed 105°C, 10000 hours.
- BRK series: Guaranteed 125°C, 6000 hours (4000 hours: 80V or more).



Marking color : Blue print




### Specifications

Item	Performance																		
Category temperature range (°C)	BR1 series: - 55 to +105 BRK series: - 55 to +125																		
Tolerance at rated capacitance (%)	±20 (20°C, 120Hz)																		
Leakage current (µA) (max.)	25V to 80V: 0.01CV or 3 whichever is larger (after 2 minutes) 100V: 0.05CV or 15 whichever is larger (after 2 minutes), : Rated capacitance (µF) ; V : Rated voltage (V) (20°C)																		
Tangent of loss angle (tanδ)	<table border="1"> <thead> <tr> <th>Rated voltage (V)</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>80</th> <th>100</th> </tr> </thead> <tbody> <tr> <td>tanδ (max.)</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> <td>0.08</td> <td>0.08</td> <td>0.08</td> </tr> </tbody> </table> (20°C, 120Hz)	Rated voltage (V)	25	35	50	63	80	100	tanδ (max.)	0.14	0.12	0.10	0.08	0.08	0.08				
Rated voltage (V)	25	35	50	63	80	100													
tanδ (max.)	0.14	0.12	0.10	0.08	0.08	0.08													
Characteristics at high and low temperature	<table border="1"> <thead> <tr> <th>Impedance ratio (max.)</th> <th>Z-25°C/Z+20°C</th> <th>1.5</th> </tr> </thead> <tbody> <tr> <td></td> <th>Z-55°C/Z+20°C</th> <td>2.0</td> </tr> </tbody> </table> (100kHz)	Impedance ratio (max.)	Z-25°C/Z+20°C	1.5		Z-55°C/Z+20°C	2.0												
Impedance ratio (max.)	Z-25°C/Z+20°C	1.5																	
	Z-55°C/Z+20°C	2.0																	
Endurance (Applied ripple current)	<table border="1"> <thead> <tr> <th></th> <th>BR1 series</th> <th>BRK series</th> </tr> </thead> <tbody> <tr> <td>Test temperature and time</td> <td>105°C, 10000 hours</td> <td>125°C, 6000 hours (80V or more: 4000 hours)</td> </tr> <tr> <td>Leakage current</td> <td>The initial specified value or less</td> <td>The initial specified value or less</td> </tr> <tr> <td>Percentage of capacitance change</td> <td>Within ±30% of initial value</td> <td>Within ±30% of initial value</td> </tr> <tr> <td>Tangent of the loss angle</td> <td>200% or less of the initial specified value</td> <td>200% or less of the initial specified value</td> </tr> <tr> <td>ESR change</td> <td>200% or less of the initial specified value</td> <td>200% or less of the initial specified value</td> </tr> </tbody> </table>		BR1 series	BRK series	Test temperature and time	105°C, 10000 hours	125°C, 6000 hours (80V or more: 4000 hours)	Leakage current	The initial specified value or less	The initial specified value or less	Percentage of capacitance change	Within ±30% of initial value	Within ±30% of initial value	Tangent of the loss angle	200% or less of the initial specified value	200% or less of the initial specified value	ESR change	200% or less of the initial specified value	200% or less of the initial specified value
	BR1 series	BRK series																	
Test temperature and time	105°C, 10000 hours	125°C, 6000 hours (80V or more: 4000 hours)																	
Leakage current	The initial specified value or less	The initial specified value or less																	
Percentage of capacitance change	Within ±30% of initial value	Within ±30% of initial value																	
Tangent of the loss angle	200% or less of the initial specified value	200% or less of the initial specified value																	
ESR change	200% or less of the initial specified value	200% or less of the initial specified value																	
Shelf life	Test time and temperature : 1000hours (BR1 series 105°C), 1000hours (BRK series 125°C) Voltage application treatment : According to JIS C5101-4 4.1.																		

### Outline Drawing

Unit : mm

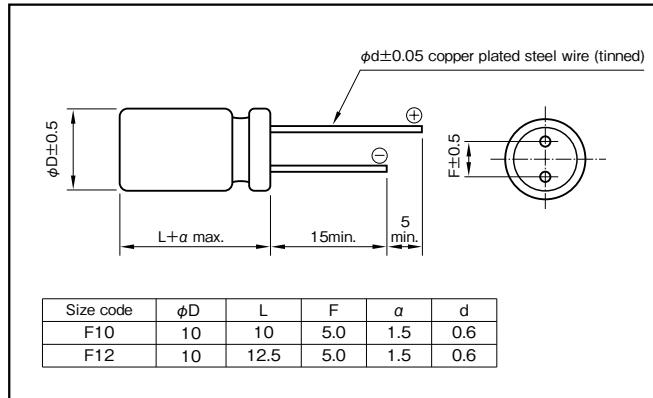

### Coefficient of Frequency for Rated Ripple Current

Frequency (Hz)	120	1k	10k	100k
Rated voltage (V)	120	1k	10k	100k
25 to 100	0.10	0.30	0.60	1

### Product code system (\*For general product)

10000hours guaranteed: BR1 series (example : 35V270µF)

RS*	BR1	271	M	1G	F10	100*	E
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Taping and packing code	Additional code

4000hours guaranteed: BRK series (example : 63V56µF)

RS*	BRK	560	M	4E	F10	100*	E
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Taping and packing code	Additional code

6000hours guaranteed: BRK-B series (example : 35V270µF)

RS*	BRK	271	M	1G	F10	100*	B
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Taping and packing code	Additional code

\* "100" : "T2" taping and packing code.

"T2" is the standard packing for BR1 and BRK.

· For details, refer to the various "Product Code System" pages.

## BR1 series: Standard Ratings

Rated voltage (V) Rated capacitance (μF)	Item	25 (1T)			35 (1G)			50 (1U)			63 (4E)		
		Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mA rms)	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mA rms)	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mA rms)	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mA rms)
56	—	—	—	—	—	—	—	—	—	—	10×10	30	1800
100	—	—	—	—	—	—	10×10	28	2000	10×12.5	26	2500	—
150	—	—	—	—	—	—	10×12.5	24	3000	—	—	—	—
270	—	—	—	10×10	20	2500	—	—	—	—	—	—	—
330	10×10	20	2500	—	—	—	—	—	—	—	—	—	—
390	—	—	—	10×12.5	18	3500	—	—	—	—	—	—	—
560	10×12.5	18	3500	—	—	—	—	—	—	—	—	—	—

Rated voltage (V) Rated capacitance (μF)	Item	80 (1R)			100 (1H)		
		Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mA rms)	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mA rms)
15	—	—	—	—	10×10	45	1600
33	10×10	36	1700	—	—	—	—

(Note) Rated ripple current : 105°C , 100kHz ; ESR : 20°C , 100kHz

## BRK series: Standard Ratings (●Marked: 6000 hours guaranteed)

Rated voltage (V) Rated capacitance (μF)	Item	25 (1T)			35 (1G)			50 (1U)			63 (4E)		
		Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mA rms)	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mA rms)	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mA rms)	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mA rms)
56	—	—	—	—	—	—	—	—	—	● 10×10	30	1400	—
100	—	—	—	—	—	—	● 10×10	28	1600	● 10×12.5	26	2000	—
150	—	—	—	—	—	—	● 10×12.5	24	2500	—	—	—	—
270	—	—	—	● 10×10	20	2000	—	—	—	—	—	—	—
330	● 10×10	20	2000	—	—	—	—	—	—	—	—	—	—
390	—	—	—	● 10×12.5	18	3000	—	—	—	—	—	—	—
560	● 10×12.5	18	3000	—	—	—	—	—	—	—	—	—	—


Rated voltage (V) Rated capacitance (μF)	Item	80 (1R)			100 (1H)		
		Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mA rms)	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mA rms)
15	—	—	—	—	10×10	45	1000
33	10×10	36	1200	—	—	—	—

(Note) Rated ripple current : 125°C , 100kHz ; ESR : 20°C , 100kHz

**Chip Type**

- GREEN CAP
- SMD
- Low ESR
- 105°C  
2000hours
- Anti-cleaning solvent

- Super low ESR and high ripple current are realized.
- Guaranteed 105°C, 2000 hours.



Marking color : Blue print


**Specifications**

Item	Performance										
Category temperature range (°C)	-55 to +105										
Tolerance at rated capacitance (%)	±20 (20°C, 120Hz)										
Leakage current (µA) (max.) *Note	0.2CV (after 2 minutes) C : Rated capacitance (µF) ; V : Rated voltage (V) (20°C)										
Tangent of the loss angle (tanδ)	0.12 or less (20°C, 120Hz)										
Characteristics at high and low temperature	<table border="1"> <tr> <td rowspan="2">Impedance ratio (max.)</td> <td>Z-25°C/Z+20°C</td> <td>1.15</td> </tr> <tr> <td>Z-55°C/Z+20°C</td> <td>1.25</td> </tr> </table> <p style="text-align: right;">(100kHz)</p>	Impedance ratio (max.)	Z-25°C/Z+20°C	1.15	Z-55°C/Z+20°C	1.25					
Impedance ratio (max.)	Z-25°C/Z+20°C		1.15								
	Z-55°C/Z+20°C	1.25									
Endurance (105°C) (Applied ripple current)	<table border="1"> <tr> <td>Test time</td> <td>2000 hours</td> </tr> <tr> <td>Leakage current</td> <td>The initial specified value or less</td> </tr> <tr> <td>Percentage of capacitance change</td> <td>Within ±20% of initial value</td> </tr> <tr> <td>Tangent of the loss angle</td> <td>150% or less of the initial specified value</td> </tr> <tr> <td>ESR change</td> <td>150% or less of the initial specified value</td> </tr> </table>	Test time	2000 hours	Leakage current	The initial specified value or less	Percentage of capacitance change	Within ±20% of initial value	Tangent of the loss angle	150% or less of the initial specified value	ESR change	150% or less of the initial specified value
Test time	2000 hours										
Leakage current	The initial specified value or less										
Percentage of capacitance change	Within ±20% of initial value										
Tangent of the loss angle	150% or less of the initial specified value										
ESR change	150% or less of the initial specified value										
Bias Humidity 60°C, 90 to 95%RH	<table border="1"> <tr> <td>Test time</td> <td>500 hours</td> </tr> <tr> <td>Leakage current</td> <td>The initial specified value or less</td> </tr> <tr> <td>Percentage of capacitance change</td> <td>Within ±20% of initial value</td> </tr> <tr> <td>Tangent of the loss angle</td> <td>150% or less of the initial specified value</td> </tr> <tr> <td>ESR change</td> <td>150% or less of the initial specified value</td> </tr> </table>	Test time	500 hours	Leakage current	The initial specified value or less	Percentage of capacitance change	Within ±20% of initial value	Tangent of the loss angle	150% or less of the initial specified value	ESR change	150% or less of the initial specified value
Test time	500 hours										
Leakage current	The initial specified value or less										
Percentage of capacitance change	Within ±20% of initial value										
Tangent of the loss angle	150% or less of the initial specified value										
ESR change	150% or less of the initial specified value										
Characteristics of applied surge voltage	<p>The capacitors shall be subject to 1000 cycles each consisting of charge with the surge voltage specified at 105°C for 30 seconds through a protective resistor (Rc=1kΩ) in 6 minutes per cycle. Surge voltage : 1.15 times of rated voltage</p> <table border="1"> <tr> <td>Leakage current</td> <td>The initial specified value or less</td> </tr> <tr> <td>Percentage of capacitance change</td> <td>Within ±20% of initial value</td> </tr> <tr> <td>Tangent of the loss angle</td> <td>150% or less of the initial specified value</td> </tr> <tr> <td>ESR change</td> <td>150% or less of the initial specified value</td> </tr> </table>	Leakage current	The initial specified value or less	Percentage of capacitance change	Within ±20% of initial value	Tangent of the loss angle	150% or less of the initial specified value	ESR change	150% or less of the initial specified value		
Leakage current	The initial specified value or less										
Percentage of capacitance change	Within ±20% of initial value										
Tangent of the loss angle	150% or less of the initial specified value										
ESR change	150% or less of the initial specified value										
Failure rate	0.5% per 1000 hours maximum (Confidence level 60% at 105°C)										

\*Note : If any doubt arises, measure the leakage current after following voltage application treatment.  
Voltage application treatment : DC rated voltage are applied to the capacitors for 120 minutes at 105°C.

**Outline Drawing**

Unit : mm

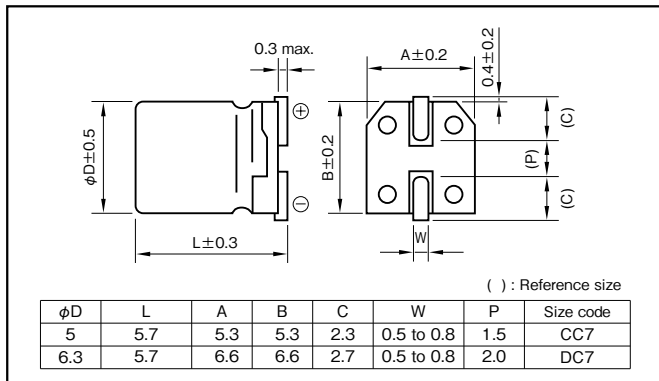

Refer to individual page.  
(Soldering conditions, Land pattern size, The taping specifications)

Product code system : 4V150µF (*For general product)							
RS*	PVX	151	M	1A	CC7		E
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Taping and packing code	Additional code

For details, refer to the various "Product Code System" pages.

Standard Ratings


Rated voltage (V) Rated capacitance (μF)	Item	2.5 (1P)			4 (1A)			6.3 (1J)			10 (1L)		
		Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mArms)
100	—	—	—	—	—	—	5×5.7	15	3100	5×5.7	15	3100	
120	—	—	—	—	—	—	—	—	—	6.3×5.7	13	3300	
150	5×5.7	10	3800	5×5.7	10	3800	5×5.7	15	3100	—	—	—	
220	5×5.7	10	3800	5×5.7	10	3800	6.3×5.7	9	4000	—	—	—	
270	5×5.7	10	3800	—	—	—	—	—	—	—	—	—	
330	6.3×5.7	9	4000	6.3×5.7	9	4000	—	—	—	—	—	—	
390	6.3×5.7	9	4000	—	—	—	—	—	—	—	—	—	

(Note) Rated ripple current : 105°C, 100kHz ; ESR : 20°C, 100kHz

**Chip Type**

- GREEN CAP
- SMD
- Low ESR
- 105°C  
2000hours
- Anti-cleaning solvent

- Super low ESR and high ripple current are realized.
- Guaranteed 105°C, 2000 hours.



Marking color : Blue print


**Specifications**

Item	Performance	
Category temperature range (°C)	-55 to +105	
Tolerance at rated capacitance (%)	±20 (20°C,120Hz)	
Leakage current (µA) (max.) *Note	0.2CV (after 2 minutes) C : Rated capacitance (µF) , V : Rated voltage (V) (20°C)	
Tangent of the loss angle (tanδ)	0.12 or less (20°C,120Hz)	
Characteristics at high and low temperature	Impedance ratio (max.)	Z-25°C/Z+20°C 1.15
		Z-55°C/Z+20°C 1.25 (100kHz)
Endurance (105°C) (Applied ripple current)	Test time	2000 hours
	Leakage current	The initial specified value or less
	Percentage of capacitance change	Within ±20% of initial value
	Tangent of the loss angle	150% or less of the initial specified value
	ESR change	150% or less of the initial specified value
Bias Humidity 60°C, 90 to 95%RH	Test time	500 hours
	Leakage current	The initial specified value or less
	Percentage of capacitance change	Within ±20% of initial value
	Tangent of the loss angle	150% or less of the initial specified value
	ESR change	150% or less of the initial specified value
Characteristics of applied surge voltage	The capacitors shall be subject to 1000 cycles each consisting of charge with the surge voltage specified at 105°C for 30 seconds through a protective resistor (Rc=1kΩ) in 6 minutes per cycle. Surge voltage : 1.15 times of rated voltage	
	Leakage current	The initial specified value or less
	Percentage of capacitance change	Within ±20% of initial value
	Tangent of the loss angle	150% or less of the initial specified value
	ESR change	150% or less of the initial specified value
Failure rate	0.5% per 1000 hours maximum (Confidence level 60% at 105°C)	

\*Note : If any doubt arises, measure the leakage current after following voltage application treatment.  
Voltage application treatment : DC rated voltage are applied to the capacitors for 120 minutes at 105°C.

**Outline Drawing**

Unit : mm

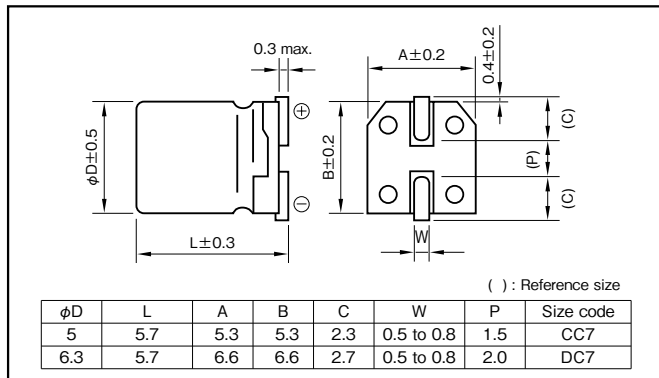

Refer to individual page.  
(Soldering conditions, Land pattern size, The taping specifications)

Product code system : 4V150µF (\*For general product)

RS*	PVM	151	M	1A	CC7		E
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Taping and packing code	Additional code

For details, refer to the various "Product Code System" pages.

Standard Ratings

Rated voltage (V) Rated capacitance (μF)	Item	2.5 (1P)			4 (1A)			6.3 (1J)			10 (1L)			16 (1E)		
		Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mA rms)	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mA rms)	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mA rms)	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mA rms)	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mA rms)
33	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
39	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
47	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
56	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
68	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
100	—	—	—	—	5×5.7	22	2610	5×5.7	24	2500	6.3×5.7	25	2530	—	—	—
120	—	—	—	—	—	—	—	5×5.7	24	2500	6.3×5.7	25	2530	—	—	—
150	—	—	—	—	5×5.7	22	2610	—	—	—	—	—	—	—	—	—
180	5×5.7	21	2670	—	—	—	—	—	—	—	—	—	—	—	—	—
220	5×5.7	21	2670	—	5×5.7	22	2610	6.3×5.7	15	3160	—	—	—	—	—	—
270	—	—	—	—	6.3×5.7	15	3160	—	—	—	—	—	—	—	—	—
330	6.3×5.7	15	3160	—	6.3×5.7	15	3160	—	—	—	—	—	—	—	—	—
390	6.3×5.7	15	3160	—	—	—	—	—	—	—	—	—	—	—	—	—

(Note) Rated ripple current : 105°C, 100kHz ; ESR : 20°C, 100kHz


**Chip Type**

- GREEN CAP
- SMD
- Low ESR
- 125°C 1000hours
- Anti-cleaning solvent

- Super low ESR and high ripple current are realized.
- Guaranteed 125°C, 1000 hours.



Marking color : Blue print




**Specifications**

Item	Performance	
Category temperature range (°C)	-55 to +125	
Tolerance at rated capacitance (%)	±20 (20°C,120Hz)	
Leakage current (µA) (max.) *Note	0.2CV (after 2 minutes) C : Rated capacitance (µF) , V : Rated voltage (V) (20°C)	
Tangent of the loss angle (tanδ)	0.12 or less (20°C,120Hz)	
Characteristics at high and low temperature	Impedance ratio (max.)	Z-25°C/Z+20°C 1.15
		Z-55°C/Z+20°C 1.25 (100kHz)
Endurance (125°C) (Applied ripple current)	Test time	1000 hours
	Leakage current	The initial specified value or less
	Percentage of capacitance change	Within ±20% of initial value
	Tangent of the loss angle	150% or less of the initial specified value
	ESR change	150% or less of the initial specified value
Bias Humidity 60°C, 90 to 95%RH	Test time	500 hours
	Leakage current	The initial specified value or less
	Percentage of capacitance change	Within ±20% of initial value
	Tangent of the loss angle	150% or less of the initial specified value
	ESR change	150% or less of the initial specified value
Characteristics of applied surge voltage	The capacitors shall be subject to 1000 cycles each consisting of charge with the surge voltage specified at 125°C for 30 seconds through a protective resistor (Rc=1kΩ) in 6 minutes per cycle. Surge voltage : 1.15 times of rated voltage	
	Leakage current	The initial specified value or less
	Percentage of capacitance change	Within ±20% of initial value
	Tangent of the loss angle	150% or less of the initial specified value
	ESR change	150% or less of the initial specified value
Failure rate	0.5% per 1000 hours maximum (Confidence level 60% at 125°C)	

\*Note : If any doubt arises, measure the leakage current after following voltage application treatment.  
Voltage application treatment : DC rated voltage are applied to the capacitors for 120 minutes at 125°C.

**Outline Drawing**

Unit : mm

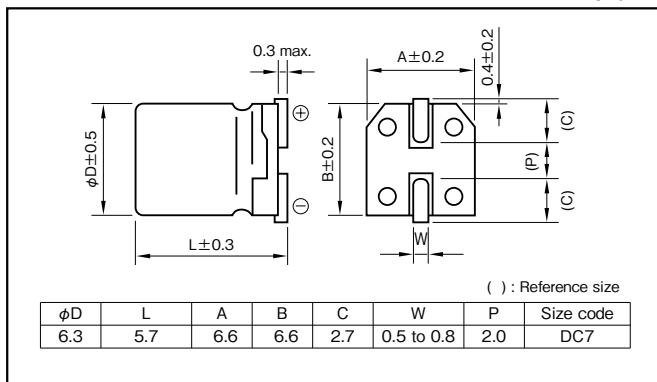

Refer to individual page.  
(Soldering conditions, Land pattern size, The taping specifications)

**Product code system : 4V150µF (\*For general product)**

RS*	PVK	151	M	1A	DC7		E
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Taping and packing code	Additional code

For details, refer to the various "Product Code System" pages.



Standard Ratings

Rated voltage (V) Rated capacitance (μF)	Item	2.5 (1P)			4 (1A)			6.3 (1J)			10 (1L)			16 (1E)		
		Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mA rms)	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mA rms)	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mA rms)	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mA rms)	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mA rms)
33	—	—	—	—	—	—	—	—	—	—	—	—	6.3×5.7	37	590	
39	—	—	—	—	—	—	—	—	—	—	—	—	6.3×5.7	37	590	
47	—	—	—	—	—	—	—	—	—	—	6.3×5.7	31	680	6.3×5.7	37	590
56	—	—	—	—	—	—	—	—	—	—	6.3×5.7	31	680	—	—	—
68	—	—	—	—	—	—	6.3×5.7	27	720	—	—	—	—	—	—	—
82	—	—	—	—	—	—	6.3×5.7	27	720	—	—	—	—	—	—	—
100	—	—	—	6.3×5.7	26	770	6.3×5.7	27	720	—	—	—	—	—	—	—
120	—	—	—	—	—	—	6.3×5.7	27	720	—	—	—	—	—	—	—
150	—	—	—	6.3×5.7	26	770	—	—	—	—	—	—	—	—	—	—
220	6.3×5.7	25	770	—	—	—	—	—	—	—	—	—	—	—	—	—

(Note) Rated ripple current : 125°C, 100kHz ; ESR : 20°C, 100kHz

**Aluminum Electrolytic Capacitors  
(Chip Type, Miniature Type, Large Type, For Audio)**

## ■ Cautions for Using Aluminum Electrolytic Capacitors

Please read the specification before using ELNA products.

The following cautions should be observed when using our aluminum electrolytic capacitors to assure their maximum stability and performance. When your application design conditions or operating conditions exceed the limit of the product specification, please contact us. If used under conditions beyond the limit of our specifications, it may cause defects such as short circuit, open circuit, leakage, explosion or combustion.

### ■ Cautions for usage

#### 1. DC electrolytic capacitors are polarized.

- If used with a wrong polarity, it creates an abnormal current resulting in a short circuit or damage to itself. Use DC bipolar electrolytic capacitors for use with uncertain or unknown polarity. DC capacitors cannot be used in AC circuits.

#### 2. Use within the rated voltage.

- If a voltage exceeding the rated voltage is applied, it may cause characteristic deterioration or damage due to the increased leakage current.
- When ripple current is loaded, make sure that the peak value of the ripple voltage does not exceed the rated voltage.

#### 3. Using for power supply circuit.

- While aluminum electrolytic capacitors are operated electrolyte liquid inside dries up and E.S.R. (Equivalent Series Resistance) of the capacitor increases. In case operated longer than rated life time, the capacitance much decreases, tangent of loss angle and E.S.R. much increases. Therefore for some case the sum of bias direct voltage and the peak of ripple voltage is over the rated voltage of the capacitor.
- For any type of circuit, in case the sum of bias direct voltage and the peak of ripple voltage is over the rated voltage of the capacitors or in case the minimum voltage is lower than 0 (zero) volt, the voltage control for the capacitors shall be provided.

#### 4. Do not use in a circuit which requires rapid charging or discharging.

- If used in a circuit requiring rapid charging or discharging, it may cause characteristic deterioration or damage to itself due to the heat generated inside the capacitor. In such cases, contact us for our rapid charging/discharging capacitors.

#### 5. Use within the rated ripple current.

- If applied ripple current exceeds rated ripple current, the life of the capacitor may be shortened, or in an extreme case it gets destroyed due to its internal heat. Use high-ripple type capacitors for such circuits.

#### 6. Changes in characteristics due to operating temperature.

- The characteristics of an electrolytic capacitor will change with a change in the temperature. Such changes are temporary and the original characteristics will be restored at the original temperature (if the characteristics are not deteriorated by remaining

at a high temperature for a long time). If used at a temperature exceeding the guaranteed temperature range, the capacitor may be damaged due to the increased leakage current. Pay attention to the capacitor temperature being affected by the ambient temperature of the unit, the temperature inside the appliance, the heat radiated by another hot component in the unit and the heat inside the capacitor itself due to the ripple current.

- (1)The electrostatic capacitance is normally shown as the value at 20°C-120Hz. It increases as the temperature raises and decreases as it lowers.
- (2)The tangent of loss angle ( $\tan\delta$ ) is normally shown as the value at 20°C-120Hz. It decreases as the ambient temperature gets high and increases as it gets low.
- (3)The leakage current increases as the temperature gets high and decreases as it gets low.

#### 7. Changes in the characteristics due to frequency.

- The characteristics of an electrolytic capacitor will change according to the change in the operating frequency.
  - (1)The electrostatic capacity is normally shown as the value at 20°C-120Hz. It decreases as the frequency increases.
  - (2)The tangent of loss angle ( $\tan\delta$ ) is normally shown as the value at 20°C-120Hz. It increases as the frequency gets high.
  - (3)The impedance is normally shown as the value at 100kHz 20°C. It increases as the frequency lowers.

#### 8. Aluminum electrolytic capacitor life.

- The life of an aluminum electrolytic capacitor terminates when it fails due to the deterioration in its electronic characteristics. Temperature and the ripple current since they especially affect the life. See chart on page.

#### 9. Changes in aluminum electrolytic capacitors during storage.

- After storage for a long period, whether unused or mounted on the appliance, the leakage current of an aluminum electrolytic capacitor will increase. This tendency is more prominent when the ambient temperature is high. If a capacitor has been stored for more than 2 years under normal temperature (shorter if high temperature) and it shows increased leakage current, a treatment by voltage application is recommended. Addition of a protective circuit in the design of the appliance is also recommended, considering the effect of the initial increased current.

**10. Insulation between the capacitor case and the cathode terminal.**

- The capacitor case and the cathode terminal are connected through the electrolyte which has uncertain resistance. If a complete insulation of the case is necessary, add an insulator at assembly.

**11. NC terminal (the supplemental terminal) (series RPK)**

- Since NC terminal is not insulated. It should be mounted at a position electronically independent from all other parts of the circuit.

**12. External sleeve**

- During a preheating or a hardening of mounting adhesive may cause a sleeve cracked. The capacitors are usually sleeved with poly vinyl chloride or poly ethylene terephthalate for the indication purpose only. Please do not consider it as an insulation.

**13. Fumigation Process**

- When exporting electronic equipment abroad, fumigation process may be performed on wooden packaging material with a halogen (compound) gas such as methyl bromide. Exercise care as this halogen gas may corrode capacitors. Also, use caution to epidemic preventive agent as corrosive component such as halogen may be contained.

**14. Specific Operating Environments**

- Capacitors may corrode when stored or used in a place filled with acidic toxic gases (such as hydrogen sulfide, sulfurous acid, nitrous acid, chlorine, bromine, methyl bromide, etc.) If capacitors are used or stored in such environments, please let us know.

**15. Use at a high altitude**

- The use of capacitors at high altitudes such as on an airplane causes a large difference between the internal pressure of the capacitors and the atmospheric pressure. However, there is no problem in use under atmospheric pressure up to about an altitude of 10,000 meters. Please check the operation of electronic equipment at the operating environmental temperature because the temperature lowers with increased altitude. If the condition is severe like space, please contact us.

**16. Hole pitch adjustment of the PCB to the capacitors.**

- Set the hole pitch of the PCB to the lead pitch (the "F" distance in the catalog) of the capacitor. Be careful since a short circuit, a cut or an increase in the leakage current etc. may be caused by the stress given to the lead wire terminals due to the difference between the hole pitch and the lead pitch.

**17. Capacitors with pressure valves.**

- A part of the capacitor case is made thin to have the function as the pressure valve in order to prevent explosion due to the rise of inside pressure when a reverse or excessive voltage is applied to the capacitor. Once it has worked as a valve, the whole capacitor needs to be replaced since the valve will not restore.
- When you use a capacitor with pressure valve, provide certain space above the pressure valve as below to prevent an interference when it works as a valve.

Diameter of the capacitor (mm)	18 or less	20 to 40
Required space above the valve (mm)	2.0 or more	3.0 or more

**18. Double-sided PCB's**

- When you use electrolytic capacitors on a double sided PCB, be careful not to have the circuit pattern run under where the capacitor is mounted. Otherwise it may cause a short circuit on the PCB depending on the condition of mounting.

**19. Regarding to connection of capacitors**

- Aluminum electrolytic capacitor has electrolyte liquid so that the most portion of electric loss characteristics came from E.S.R(Equivalent Series Resistance) of electrolyte liquid. Therefore the capacitor is an electronic devise which can flow high ripple current in case the temperature increases and it decreases E.S.R. In case connecting two capacitors or more, E.S.R. of the capacitors is close to the resistance of the circuit. Therefore in case current is unbalanced and some capacitors has high ripple current, temperature increase, it makes more high current and finally it is over the rated ripple current. For parallel connection of capacitors the proper design of electric circuit such as balancing of each capacitors resistance or control of total ripple current shall be provided to avoid excess ripple current and voltage.
- When two or more capacitors are arranged in series, the voltage given to each capacitors shall be kept below the rated voltage level, by also giving consideration to the balance of the voltage impressed on the capacitors. Further, partial pressure resistor which considers leakage current shall be provided parallel to each condenser not to have over-voltage impressed on. Balance resistance are explained on p.106 of our Catalog.

NOTE : Design, Specifications are subject to change without notice. It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

## ■ Cautions for usage

### 1. Cautions for mounting.

- Check the ratings (electrostatic capacitance and rated voltage) of the capacitor before mounting.
- Transient recovery voltage may be generated in the capacitor due to dielectric absorption. If required, this voltage can be discharged with a resistor with a value of about 1 kΩ.
- Check the polarity of the capacitor to the chassis.
- Do not drop the capacitor to the floor. Do not use the dropped capacitor.
- Do not deform the capacitor for mounting.

### 2. Do not apply excessive pressure to the capacitor, its terminals or lead wires.

- Make sure that the contact path of the capacitor meets the hole pitch of the PCB before mounting.
- Do not set the automatic insertion machine to clinch the capacitor lead wires too strong.
- Pay attention to the impact given by the component receptacles of the automatic insertion/mounting machines and the product checker, and from the centering operation.

### 3. Soldering.

- Do not dip the capacitor into melted solder.
- The soldering conditions  
About detail conditions are described in the catalog or product specification.
- Do not flux other part than the terminals.
- If there is a direct contact between the sleeve of the capacitor and the printed circuit pattern or a metal part of another component such as a lead wire, it may cause shrinkage or crack.
- When you use the capacitor with its sleeve touching directly to the PCB, excessive solder temperature or excessive soldering time may cause the sleeve to shrink or crack during the heat.
- If the application is for extended use, understand and manage the soldering characteristics to avoid abnormal current caused by a contact failure between the capacitor and the PCB.

### 4. Handling after soldering

- After soldering, do not tilt, push down or twist the capacitor.
- After soldering, do not hold the capacitor as a handle to carry the PCB.
- After soldering, do not hit the capacitor with any obstacle. If PCB's are piled up for storage, the capacitor should not touch another PCB or component.

### 5. Cleaning after Soldering

- Recommended cleaning method
  - (1) cleaning solutions:
    - (a) CLEANTHROUGH 710M, 750H, 750L
    - (b) PINEALPHA ST-100S
    - (c) Techno Care FRW-4~17
    - (d) Isopropyl alcohol (2-propanol)
  - (2) Cleaning conditions:
    - (a) The temperature of cleaning solution shall be less than 60°C.
    - (b) Use immersion or ultrasonic waves within two minutes.
    - (c) After cleaning, capacitors and PCB's shall thoroughly be rinsed and dried with hot blast for more than 10 minutes. The temperature of such breeze should be less than the upper category temperature.
    - (d) After cleaning, do not keep capacitors in cleaning solution atmosphere or airtight containers.
- During cleaning, control the cleaning solution against contamination.

### 6. Fixing adhesives and coating materials.

- Do not use fixing adhesive or coating material containing halogen-based solvent.
- Before applying the fixing adhesive or the coating material, make sure that there is no remaining flux or stains between the PCB and the sealed part of the capacitor.
- Before applying the fixing adhesive or the coating material, make sure that the detergent etc. has dried up.
- Do not cover the whole surface of the sealed part (terminal side) of the capacitor with the fixing adhesive or the coating material.
- Observe the description in the catalog or the product specifications concerning the thermal stiffening conditions of the fixing adhesive or the coating material. (If there is no such description, contact us.)  
When both discrete and SMT components are on the same PCB, the fixing material for the SMT components may cause crack, tear or shrinkage on the external sleeve depending on the thermal stiffening condition.
- Recommended fixing adhesives and coating materials  
Fixing adhesives : Cemedine 1500, Diabond DN83K, Bond G103  
Coating materials : Taffy TF1159, HumiSeal 1B66NS, 1A27NS

**■ Other Cautions****1. Do not touch capacitor terminals with bare hands.**

You may get electric shock or your hand may be burnt. Discharge it with a 1 K $\Omega$  resistance before use if necessary.

**2. Do not short the capacitor terminals with a conductor.**

Do not spill conductive solution including acid or alkaline solution on the capacitor.

**3. Periodical Inspections should be established for the capacitors in industrial appliances.**

- The following items should be checked:
  - (1) Appearance : Check if there is any open valve or leakage.
  - (2) Electronic performance : Check the leakage current, the electrostatic capacitance, the tangent of loss angle and other items described in the catalog or the product specifications.

**4. Take the following measures in case of emergency.**

- If you see gas coming out of the capacitor valve when the set is in operation, turn off the power switch of the unit or unplug the power cord from the outlet.
- Keep your face away from the capacitor pressure valve, since the high temperature gas at over 100°C bursts out when the valve works. If the gas gets into your eyes or your mouth, wash your eyes or your mouth. Do not ingest the capacitor electrolyte. If the electrolyte gets on your skin, wash it out with soap.

**5. Storing conditions.**

- Avoid high temperature or high humidity when storing capacitors. Keep the storing temperature at 5°C to 35°C and the relative humidity not more than 75%.
- The leakage current of an aluminum electrolytic capacitor tends to increase when stored for a long time. This tendency becomes more prominent if the ambient temperature is high. The leakage current will be decreased by voltage application. If necessary, treatment by voltage application should be made on the capacitors which have been stored for a long period (more than 2 years after production).
- Do not store capacitors at a place where there is a possibility that they may get water, salt or oil spill.
- Do not store capacitors at a place where the air contains dense hazardous gas (hydrogen sulfide, sulfurous acid, nitrous acid, chlorine, ammonia, etc.).
- Fumigation treatment with toxic gas covering the whole wooden container frames as moth proofing during shipment may leave residual toxic gas.
- Do not store capacitors at a place where it gets ultra-violet or radioactive rays.

**6. Disposing of capacitors.**

- Punch a hole or crush the capacitors (to prevent explosion) before incineration at approved facility.
- If they are not to be incinerated, bring them to a professional industrial waste disposal company.

**7. Other notes.**

- Please refer to the following literature for anything not described in the specification or the catalog.

(Technical report of Japan Electronics and Information Technology Industries Association, EIAJ RCR-2367 "Guideline of notabilia for fixed aluminum electrolytic capacitors for use in electronic equipment")

**Chip Type Aluminum Electrolytic Capacitors**

Product Code System




The Elna product code is Max.20 digits.

Example) VVD series 10V 470μF φ 8x10L

New product code  
RSVVD471M1LEH0002U

Old product code  
RVD-10V471MG10U-R2



1 Product group

R : Energy devices  
(Electrolytic capacitor)

2 Category

- S : For general
- \* A : For automotive (powertrain, safety)
- \* C : For automotive (body, info)
- M : For medical  
(international classification III)
- L : For medical  
(international classification I , II)

\* AEC-Q200 Qualified.

3-5 Series code

old code	New code
RV4	VV4
RV5	VV5
RVB	VVB
RVE	VVE
RVS	VVS
RVR	VVR
RVI	VV9
RVC	VVC
RZH	VZH
RVZ	VVZ
RVD	VVD
RVV	VVV
RZD	VZD
RZK	VZK
RVT	VVT
RZJ	VZJ
RZF	VZF
RZE	VZE
RVX	VVX
RTZ	VTZ
RTD	VTD
RTT	VTT
RTQ	VTQ

For Audio

old code	New code
RVO	VV0
RVM	VVM
RVG	VVG

\*Change alphabet "O" into zero "0".  
Change alphabet "I" into nine "9".

6-8 Rated capacitance code

The code denoting nominal capacitance shall consist of three numerals.  
The first and second numerals shall represent the significant figures of nominal capacitance in the unit of microfarad (μF), And the third numeral shall represent the number of zeros following the significant figures.

Example

Rated capacitance(μF)	Code
0.1	R10
1	010
2.2	2R2
33	330
100	101
2200	222
33000	333
470000	474

12 Diameter code

D(mm)	Code
4	B
5	C
6.3	D
8	E
10	F
12.5	G
16	J
18	K

13-14 Length code

L(mm)	Code
4.5	B5
5.3	C3
5.7	C7
5.8	C8
6.5	D5
7.7	E7
10	H0
10.5	H5
12.5	K5
13.5	L5
16.5	P5
21.5	U5

9 Capacitance tolerance code

Example

tolerance (%)	Code
± 10	K
± 20	M
0 to +30	A
-10 to +30	Q
-10 to +50	T

10-11 Rated voltage code

voltage (V)	Code
4	1A
6.3	1J
10	1L
16	1E
25	1T
35	1G
50	1U
63	4E
80	1R
100	1H

15-17 Packing code (Reel taping)

Old code	New code	Case size φ D (mm)	Reel material
R	001	φ 10 or less	Paper
R2	002	φ 10 or less	Polystyrene
R5	005	φ 12.5 or more	Polystyrene

\* Please contact us for special packaging.

18-20 Additional code

Example

Code	Contents
U	Sn-Bi plated
T	Sn 100% plated

\* Please contact us for details.



NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.



## Chip Type 85°C High CV Capacitors

GREEN CAP SMD Anti-cleaning solvent

- Compatible with surface mounting.
- Supplied with carrier taping.
- Guarantees 2000 hours at 85°C.

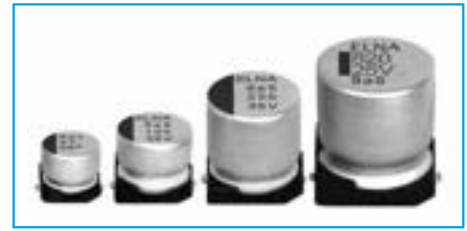


Marking color : Black print

### Specifications

Item	Performance										
Category temperature range (°C)	-40 to +85										
Tolerance at rated capacitance (%)	±20 (20°C, 120Hz)										
Leakage current (µA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (µF) ; V : Rated voltage (V) (20°C)										
Tangent of loss angle (tanδ)	Rated voltage (V)	4	6.3	10	16	25	35	50	63	100	
	tanδ (max.)	Refer to following page. (20°C, 120Hz)									
Characteristics at high and low temperature	Rated voltage (V)	4	6.3	10	16	25	35	50	63	100	
	Impedance ratio (max.)	Z-25°C/Z+20°C	7	4	3	2	2	2	2	2	2
		Z-40°C/Z+20°C	17	10	8	6	4	3	3	3	
Endurance (85°C) (Applied ripple current)	Test time	2000 hours									
	Leakage current	The initial specified value or less									
	Percentage of capacitance change	Within ±30% of initial value									
	Tangent of the loss angle	200% or less of the initial specified value									
Shelf life (85°C)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1										
Applicable standards	JIS C5101 - 1, - 18 (IEC 60384 - 1, - 18)										

### Outline Drawing

Unit : mm

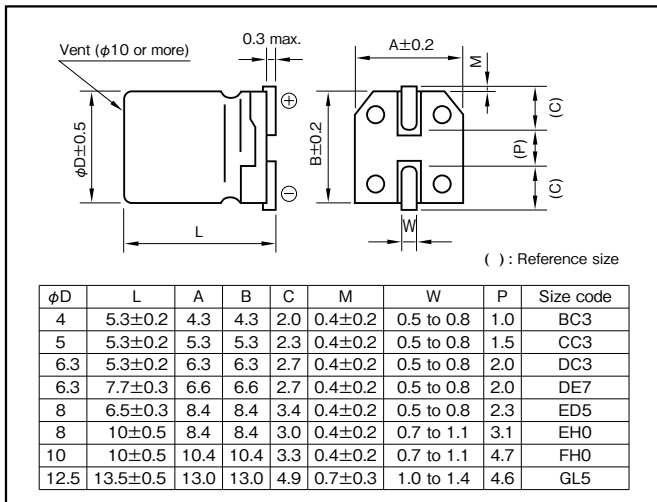

Refer to individual page.  
(Soldering conditions, Land pattern size, The taping specifications)

### Coefficient of Frequency for Rated Ripple Current

Frequency (Hz)	50 · 60	120	1k	10k · 100k
Rated voltage (V)				
4 to 16	0.80	1	1.15	1.25
25 to 35	0.80	1	1.25	1.40
50 to 63	0.80	1	1.35	1.50
100	0.70	1	1.35	1.50

### Product code system (\*For general product)

φ8 or less (example : 16V470µF)

RS*	VV5	471	M	1E	EHO		U
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Taping and packing code	Additional code

φ10 (example : 16V470µF)

RS*	VV5	471	M	1E	FH0		EU
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Taping and packing code	Additional code

φ12.5 (example : 10V1500µF)

RS*	VV5	152	M	1L	GL5	005	T
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Taping and packing code	Additional code

For details, refer to the various "Product Code System" pages.

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

## Standard Ratings

Rated voltage(V) Rated capacitance(μF)	Item	4 (1A)				6.3 (1J)				10 (1L)				16 (1E)				25 (1T)						
		Case φD×L (mm)	Size code	tan δ	Rated ripple current (mArms)	Case φD×L (mm)	Size code	tan δ	Rated ripple current (mArms)	Case φD×L (mm)	Size code	tan δ	Rated ripple current (mArms)	Case φD×L (mm)	Size code	tan δ	Rated ripple current (mArms)	Case φD×L (mm)	Size code	tan δ	Rated ripple current (mArms)			
10		—	—	—	—	—	—	—	—	4×5.3	BC3	0.24	23	4×5.3	BC3	0.20	26	4×5.3	BC3	0.18	23			
22		—	—	—	—	4×5.3	BC3	0.28	31	4×5.3	BC3	0.24	26	4×5.3	BC3	0.28	30	4×5.3	BC3	0.18	24			
33	4×5.3	BC3	0.42	31	4×5.3	BC3	0.35	28	4×5.3	BC3	0.32	32	4×5.3	BC3	0.28	32	5×5.3	CC3	0.20	44	5×5.3	CC3	0.18	43
					5×5.3	CC3	0.28	44	5×5.3	CC3	0.24	48	5×5.3	CC3	0.28	44	6.3×5.3	DC3	0.18	54	6.3×5.3	DC3	0.14	67
47	4×5.3	BC3	0.42	37	4×5.3	BC3	0.35	34	4×5.3	BC3	0.32	33	5×5.3	CC3	0.28	52	6.3×5.3	DC3	0.20	75	6.3×5.3	DC3	0.18	75
					5×5.3	CC3	0.28	52	5×5.3	CC3	0.32	54	6.3×5.3	DC3	0.20	75	6.3×7.7	DE7	0.18	124	6.3×7.7	DE7	0.18	124
100	5×5.3	CC3	0.42	63	5×5.3	CC3	0.35	58	5×5.3	CC3	0.32	54	6.3×5.3	DC3	0.20	70	6.3×5.3	DC3	0.20	70	8×6.5	ED5	0.18	118
					6.3×5.3	DC3	0.28	89	6.3×5.3	DC3	0.24	98	6.3×7.7	DE7	0.32	98	6.3×7.7	DE7	0.28	109	—	—	—	—
150	—	—	—	—	6.3×5.3	DC3	0.35	83	6.3×5.3	DC3	0.32	79	6.3×7.7	DE7	0.32	173	6.3×7.7	DE7	0.28	162	8×10	EH0	0.14	252
					6.3×7.7	DE7	0.35	113	8×6.5	ED5	0.32	175	8×10	EH0	0.20	220	8×10	EH0	0.20	260	8×10	EH0	0.18	300
220	6.3×5.3	DC3	0.42	110	6.3×7.7	DE7	0.35	188	8×10	EH0	0.24	230	8×10	EH0	0.20	260	8×10	EH0	0.28	307	10×10	FH0	0.14	458
					8×6.5	ED5	0.35	190	8×10	EH0	0.24	230	8×10	EH0	0.20	260	10×10	FH0	0.20	458	10×10	FH0	0.14	458
470	—	—	—	—	8×10	EH0	0.28	262	8×10	EH0	0.32	310	8×10	EH0	0.28	307	10×10	FH0	0.20	458	10×10	FH0	0.14	458
680	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
820	—	—	—	—	8×10	EH0	0.35	320	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
1000	—	—	—	—	10×10	FH0	0.28	458	10×10	FH0	0.24	454	12.5×13.5	GL5	0.20	521	—	—	—	—	—	—	—	—
1500	—	—	—	—	10×10	FH0	0.35	489	12.5×13.5	GL5	0.24	560	—	—	—	—	—	—	—	—	—	—	—	
2200	—	—	—	—	12.5×13.5	GL5	0.30	651	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	

Rated voltage(V) Rated capacitance(μF)	Item	35 (1G)				50 (1U)				63 (4E)				100 (1H)									
		Case φD×L (mm)	Size code	tan δ	Rated ripple current (mArms)	Case φD×L (mm)	Size code	tan δ	Rated ripple current (mArms)	Case φD×L (mm)	Size code	tan δ	Rated ripple current (mArms)	Case φD×L (mm)	Size code	tan δ	Rated ripple current (mArms)						
1		—	—	—	—	4×5.3	BC3	0.10	10	—	—	—	—	—	—	—	—						
2.2		—	—	—	—	4×5.3	BC3	0.10	15	—	—	—	—	—	—	—	—						
3.3		—	—	—	—	4×5.3	BC3	0.10	19	4×5.3	BC3	0.12	12	—	—	—	—						
4.7	4×5.3	BC3	0.12	20	4×5.3	BC3	0.12	20	5×5.3	CC3	0.12	20	—	—	—	—	—						
					5×5.3	CC3	0.10	26	6.3×5.3	DC3	0.10	44	6.3×5.3	DC3	0.12	32	8×10	EH0	0.10	94			
10	4×5.3	BC3	0.14	27	5×5.3	CC3	0.12	34	5×5.3	CC3	0.12	34	6.3×5.3	DC3	0.12	32	8×10	EH0	0.12	94			
					5×5.3	CC3	0.12	34	6.3×5.3	DC3	0.10	44	6.3×7.7	DE7	0.12	60	8×10	EH0	0.12	94			
22	5×5.3	CC3	0.14	47	6.3×5.3	DC3	0.12	47	6.3×7.7	DE7	0.12	82	8×10	EH0	0.10	139	10×10	FH0	0.10	189			
					6.3×5.3	DC3	0.12	59	8×6.5	ED5	0.12	83	8×10	EH0	0.10	139	10×10	FH0	0.12	189			
33	6.3×5.3	DC3	0.14	67	6.3×7.7	DE7	0.12	82	8×10	EH0	0.10	139	10×10	FH0	0.10	139	10×10	FH0	0.12	189			
					8×6.5	ED5	0.12	83	8×10	EH0	0.10	139	10×10	FH0	0.12	226	12.5×13.5	GL5	0.10	242			
47	6.3×5.3	DC3	0.14	54	6.3×7.7	DE7	0.12	85	8×10	EH0	0.10	139	10×10	FH0	0.10	139	10×10	FH0	0.12	189			
					8×10	EH0	0.10	252	10×10	FH0	0.12	226	10×10	FH0	0.10	226	12.5×13.5	GL5	0.10	242			
100	6.3×7.7	DE7	0.14	120	8×10	EH0	0.12	252	10×10	FH0	0.10	226	12.5×13.5	GL5	0.10	242	—	—	—	—	—	—	—
					10×10	FH0	0.10	458	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
220	8×10	EH0	0.14	260	—	—	—	—	12.5×13.5	GL5	0.10	343	—	—	—	—	—	—	—	—	—	—	—
					10×10	FH0	0.12	458	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
330	10×10	FH0	0.14	360	12.5×13.5	GL5	0.10	451	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
470	12.5×13.5	GL5	0.12	451	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	

(Note) Rated ripple current : 85° C, 120Hz

Chip Type 85°C Capacitors (height:4.5mm)

GREEN CAP

SMD

Anti-cleaning solvent

- Compatible with surface mounting for 4.5mm height capacitors.
- Supplied with carrier taping.
- Guarantees 2000 hours at 85°C.



Low Profile




Marking color : Black print

Specifications

Item	Performance																																			
Category temperature range (°C)	-40 to +85																																			
Tolerance at rated capacitance (%)	±20 (20°C, 120Hz)																																			
Leakage current (µA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (µF) ; V : Rated voltage (V) (20°C)																																			
Tangent of loss angle (tanδ)	<table border="1"> <thead> <tr> <th>Rated voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> </tr> </thead> <tbody> <tr> <td>tanδ (max.)</td> <td>0.30</td> <td>0.24</td> <td>0.19</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> </tr> </tbody> </table> <p>(20°C, 120Hz)</p>	Rated voltage (V)	6.3	10	16	25	35	50	tanδ (max.)	0.30	0.24	0.19	0.16	0.14	0.12																					
Rated voltage (V)	6.3	10	16	25	35	50																														
tanδ (max.)	0.30	0.24	0.19	0.16	0.14	0.12																														
Characteristics at high and low temperature	<table border="1"> <thead> <tr> <th rowspan="2">Impedance ratio (max.)</th> <th colspan="2">Rated voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> </tr> <tr> <th>Z-25°C/Z+20°C</th> <th>Z-40°C/Z+20°C</th> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td></td> <td></td> <td></td> <td>8</td> <td>8</td> <td>4</td> <td>4</td> <td>3</td> <td>3</td> </tr> </thead> <tbody> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table> <p>(120Hz)</p>	Impedance ratio (max.)	Rated voltage (V)		6.3	10	16	25	35	50	Z-25°C/Z+20°C	Z-40°C/Z+20°C	4	3	2	2	2	2				8	8	4	4	3	3									
Impedance ratio (max.)	Rated voltage (V)		6.3	10	16	25	35	50																												
	Z-25°C/Z+20°C	Z-40°C/Z+20°C	4	3	2	2	2	2																												
			8	8	4	4	3	3																												
Endurance (85°C) (Applied ripple current)	<table border="1"> <thead> <tr> <th>Test time</th> <th>2000 hours</th> </tr> </thead> <tbody> <tr> <td>Leakage current</td> <td>The initial specified value or less</td> </tr> <tr> <td>Percentage of capacitance change</td> <td>Within ±20% of initial value</td> </tr> <tr> <td>Tangent of the loss angle</td> <td>300% or less of the initial specified value</td> </tr> </tbody> </table>	Test time	2000 hours	Leakage current	The initial specified value or less	Percentage of capacitance change	Within ±20% of initial value	Tangent of the loss angle	300% or less of the initial specified value																											
Test time	2000 hours																																			
Leakage current	The initial specified value or less																																			
Percentage of capacitance change	Within ±20% of initial value																																			
Tangent of the loss angle	300% or less of the initial specified value																																			
Shelf life (85°C)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1																																			
Applicable standards	JIS C5101 - 1, - 18 (IEC 60384 - 1, - 18)																																			

Outline Drawing

Unit : mm

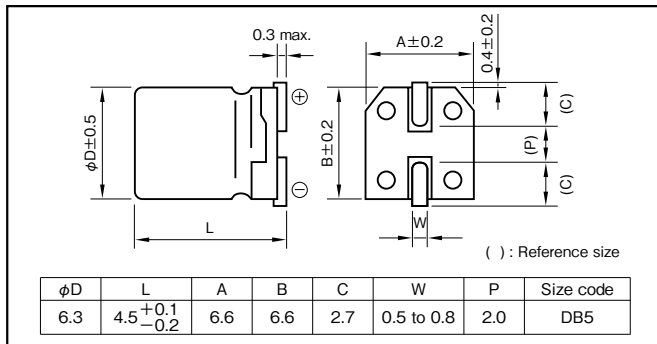

Refer to individual page.  
(Soldering conditions, Land pattern size, The taping specifications)

Coefficient of Frequency for Rated Ripple Current

Frequency (Hz)	50 · 60	120	1k	10k · 100k
Rated voltage (V)				
6.3 to 16	0.80	1	1.15	1.25
25 to 35	0.70	1	1.25	1.40
50	0.70	1	1.35	1.50

Product code system : 6.3V100µF (\*For general product)

RS*	VV4	101	M	1J	DB5	U
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Taping and packing code
						Additional code

For details, refer to the various "Product Code System" pages.

Standard Ratings

6.3 (1J)			10 (1L)			16 (1E)			25 (1T)			35 (1G)			50 (1U)		
Rated capacitance (µF)	ESR (Ω)	Rated ripple current (mA <sub>rms</sub> )	Rated capacitance (µF)	ESR (Ω)	Rated ripple current (mA <sub>rms</sub> )	Rated capacitance (µF)	ESR (Ω)	Rated ripple current (mA <sub>rms</sub> )	Rated capacitance (µF)	ESR (Ω)	Rated ripple current (mA <sub>rms</sub> )	Rated capacitance (µF)	ESR (Ω)	Rated ripple current (mA <sub>rms</sub> )	Rated capacitance (µF)	ESR (Ω)	Rated ripple current (mA <sub>rms</sub> )
100	5	76	47	8	59	33	10	55	22	12	49	22	11	52	10	20	35
						47	7	76	33	8	60						

(Note) Rated ripple current : 85°C , 120Hz ; ESR : 20°C , 120Hz

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.


Chip Type Bipolar Capacitors (height:5.5mm)

GREEN CAP

SMD

Anti-cleaning solvent

- Compatible with surface mounting for 5.5mm height capacitors.
- Supplied with carrier taping.
- Guarantees 2000 hours at 85°C.




Marking color : Black print

Specifications

Item	Performance																					
Category temperature range (°C)	-40 to +85																					
Tolerance at rated capacitance (%)	±20 (20°C, 120Hz)																					
Leakage current (µA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (µF) ; V : Rated voltage (V) (20°C)																					
Tangent of loss angle (tanδ)	<table border="1"> <thead> <tr> <th>Rated voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> </tr> </thead> <tbody> <tr> <td>tanδ (max.) φ4</td> <td>0.35</td> <td>0.30</td> <td>0.25</td> <td>0.25</td> <td>0.25</td> <td>0.25</td> </tr> <tr> <td>φ5, 6.3</td> <td>0.30</td> <td>0.25</td> <td>0.20</td> <td>0.15</td> <td>0.15</td> <td>0.15</td> </tr> </tbody> </table>	Rated voltage (V)	6.3	10	16	25	35	50	tanδ (max.) φ4	0.35	0.30	0.25	0.25	0.25	0.25	φ5, 6.3	0.30	0.25	0.20	0.15	0.15	0.15
	Rated voltage (V)	6.3	10	16	25	35	50															
tanδ (max.) φ4	0.35	0.30	0.25	0.25	0.25	0.25																
φ5, 6.3	0.30	0.25	0.20	0.15	0.15	0.15																
	(20°C, 120Hz)																					
Characteristics at high and low temperature	<table border="1"> <thead> <tr> <th>Rated voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> </tr> </thead> <tbody> <tr> <td rowspan="2">Impedance ratio (max.)</td> <td>Z-25°C/Z+20°C</td> <td>3</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z-40°C/Z+20°C</td> <td>8</td> <td>5</td> <td>4</td> <td>3</td> <td>3</td> </tr> </tbody> </table>	Rated voltage (V)	6.3	10	16	25	35	50	Impedance ratio (max.)	Z-25°C/Z+20°C	3	3	2	2	2	Z-40°C/Z+20°C	8	5	4	3	3	
	Rated voltage (V)	6.3	10	16	25	35	50															
Impedance ratio (max.)	Z-25°C/Z+20°C	3	3	2	2	2																
	Z-40°C/Z+20°C	8	5	4	3	3																
	(120Hz)																					
Endurance (85°C) (Applied ripple current)	Test time	2000 hours (with the polarity inverted every 250 hours)																				
	Leakage current	The initial specified value or less																				
	Percentage of capacitance change	Within ±20% of initial value																				
	Tangent of the loss angle	200% or less of the initial specified value																				
Shelf life (85°C)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1																					
Applicable standards	JIS C5101 - 1, - 18 (IEC 60384 - 1, - 18)																					

Outline Drawing

Unit : mm

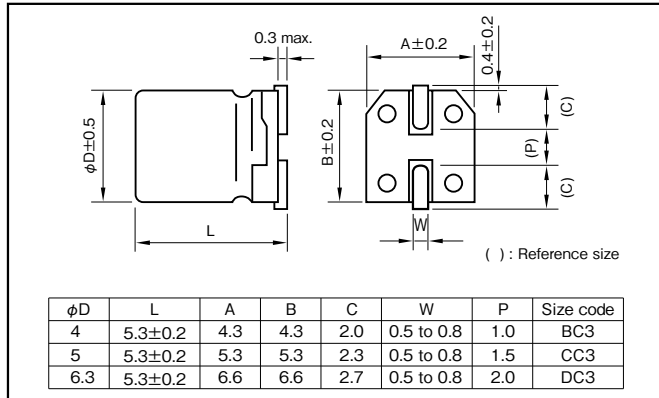

Refer to individual page.  
(Soldering conditions, Land pattern size, The taping specifications)

Coefficient of Frequency for Rated Ripple Current

Rated voltage (V)	Frequency (Hz)			
	50 · 60	120	1k	10k · 100k
6.3 to 16	0.80	1	1.15	1.25
25 to 35	0.80	1	1.25	1.40
50	0.80	1	1.35	1.50

Product code system : 6.3V47µF (\*For general product)

RS*	VVB	470	M	1J	DC3	□	U
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Taping and packing code	Additional code

For details, refer to the various "Product Code System" pages.

Standard Ratings

Rated voltage (V) / Rated capacitance (µF)	6.3 (1J)			10 (1L)			16 (1E)			25 (1T)			35 (1G)			50 (1U)		
	Case φD(mm)	ESR (Ω)	Rated ripple current (mA <sub>RMS</sub> )	Case φD(mm)	ESR (Ω)	Rated ripple current (mA <sub>RMS</sub> )	Case φD(mm)	ESR (Ω)	Rated ripple current (mA <sub>RMS</sub> )	Case φD(mm)	ESR (Ω)	Rated ripple current (mA <sub>RMS</sub> )	Case φD(mm)	ESR (Ω)	Rated ripple current (mA <sub>RMS</sub> )	Case φD(mm)	ESR (Ω)	Rated ripple current (mA <sub>RMS</sub> )
1	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2.2	—	—	—	—	—	—	—	—	—	—	—	—	4	151	10	5	113	14
3.3	—	—	—	—	—	—	—	—	—	—	—	—	4	75	17	5	75	17
4.7	—	—	—	—	—	—	4	88	14	5	53	20	5	53	21	6.3	53	24
10	—	—	—	4	50	18	5	33	26	6.3	25	35	6.3	25	35	—	—	—
22	5	23	27	6.3	19	40	6.3	15	45	—	—	—	—	—	—	—	—	—
33	6.3	15	45	6.3	13	50	6.3	10	55	—	—	—	—	—	—	—	—	—
47	6.3	11	54	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

(Note) Rated ripple current : 85°C, 120Hz ; ESR : 20°C, 120Hz

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Chip Type 105°C Standard Capacitors

GREEN CAP

SMD

105°C  
1000hours

Anti-cleaning solvent

- Compatible with surface mounting.
- Supplied with carrier taping.
- Guarantees 1000 hours at 105°C.



High temperature




Marking color : Black print

Specifications

Item	Performance
Category temperature range (°C)	-55 to +105
Tolerance at rated capacitance (%)	±20 (20°C, 120Hz)
Leakage current (µA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (µF) ; V : Rated voltage (V) (20°C)
Tangent of loss angle (tanδ)	Rated voltage (V)
	tanδ (max.)
Characteristics at high and low temperature	Rated voltage (V)
	Impedance ratio (max.)
Endurance (105°C) (Applied ripple current)	Test time
	Leakage current
	Percentage of capacitance change
	Tangent of the loss angle
Shelf life (105°C)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101 - 1, - 18 (IEC 60384 - 1, - 18)

Outline Drawing

Unit : mm

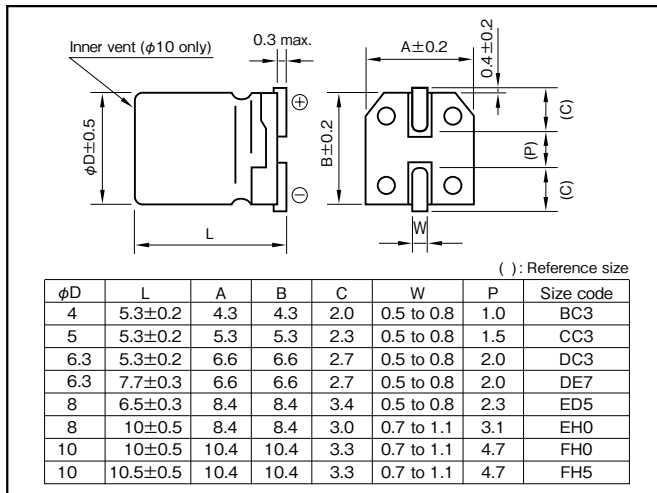

Refer to individual page.  
(Soldering conditions, Land pattern size, The taping specifications)

Coefficient of Frequency for Rated Ripple Current

Frequency (Hz)	50 · 60	120	1k	10k · 100k
Rated voltage (V)				
6.3 to 16	0.80	1	1.15	1.25
25 to 35	0.80	1	1.25	1.40
50	0.80	1	1.35	1.50

Product code system : 16V47µF (\*For general product)

Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Taping and packing code	Additional code
RS*	VVS	470	M	1E	DC3		U

For details, refer to the various "Product Code System" pages.

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

## Standard Ratings


Rated voltage (V)	Item	6.3 (1J)			10 (1L)			16 (1E)			25 (1T)			35 (1G)			50 (1U)		
		Case φD × L(mm)	ESR (Ω)	Rated ripple current (mA <sub>rms</sub> )	Case φD × L(mm)	ESR (Ω)	Rated ripple current (mA <sub>rms</sub> )	Case φD × L(mm)	ESR (Ω)	Rated ripple current (mA <sub>rms</sub> )	Case φD × L(mm)	ESR (Ω)	Rated ripple current (mA <sub>rms</sub> )	Case φD × L(mm)	ESR (Ω)	Rated ripple current (mA <sub>rms</sub> )	Case φD × L(mm)	ESR (Ω)	Rated ripple current (mA <sub>rms</sub> )
1	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	4 × 5.3	199	7
2.2	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	4 × 5.3	91	10
3.3	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	4 × 5.3	60	12
4.7	—	—	—	—	—	—	—	—	—	—	4 × 5.3	57	12	4 × 5.3	46	14	5 × 5.3	42	17
10	—	—	—	4 × 5.3	43	15	4 × 5.3	36	16	5 × 5.3	27	21	5 × 5.3	22	23	6.3 × 5.3	20	26	
22	4 × 5.3	23	21	5 × 5.3	20	25	5 × 5.3	17	28	6.3 × 5.3	12	36	6.3 × 5.3	10	50	8 × 6.5	9.0	51	
33	5 × 5.3	15	30	5 × 5.3	13	31	6.3 × 5.3	11	40	6.3 × 5.3	8.0	44	8 × 6.5	6.5	59	6.3 × 7.7	6.0	60	
47	5 × 5.3	11	36	6.3 × 5.3	9.2	43	6.3 × 5.3	7.8	47	8 × 6.5	5.6	66	—	—	—	6.3 × 7.7	4.2	63	
100	6.3 × 5.3	5.0	61	6.3 × 5.3	4.3	60	6.3 × 5.3	3.6	60	6.3 × 7.7	2.7	91	6.3 × 7.7	2.2	84	8 × 10	2.0	140	
150	—	—	—	—	—	—	6.3 × 7.7	2.4	105	8 × 10	1.8	140	8 × 10	1.4	155	10 × 10	1.3	180	
220	8 × 6.5	2.3	102	6.3 × 7.7	2.0	105	6.3 × 7.7	1.7	105	8 × 10	1.2	155	8 × 10	0.98	190	10 × 10.5	0.91	220	
330	6.3 × 7.7	1.5	105	8 × 10	1.3	195	8 × 10	1.1	195	8 × 10	0.80	190	10 × 10.5	0.65	300	—	—	—	
470	8 × 10	1.1	210	8 × 10	0.92	210	8 × 10	0.78	230	10 × 10	0.57	300	—	—	—	—	—	—	
680	8 × 10	0.73	210	10 × 10	0.63	310	10 × 10	0.54	310	—	—	—	—	—	—	—	—	—	
1000	8 × 10	0.50	210	10 × 10	0.43	310	—	—	—	—	—	—	—	—	—	—	—	—	
1500	10 × 10	0.33	310	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	

(Note) Rated ripple current : 105°C , 120Hz ; ESR : 20°C , 120Hz

## Chip type, 105°C Use, Long Life, High CV Capacitors

GREEN CAP SMD 105°C 2000hours Anti-cleaning solvent

- Compatible with surface mounting.
- Supplied with carrier taping.
- Guarantees 2000 hours 105°C.



Marking color : Black print

### Specifications

Item	Performance								
Category temperature range (°C)	-40 to +105								
Tolerance at rated capacitance (%)	±20 (20°C, 120Hz)								
Leakage current (µA) (max.)	0.01 CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (µF), V : Rated voltage (V) (20°C)								
Tangent of loss angle (tanδ)	Rated voltage (V)	4	6.3	10	16	25	35	50	
	tanδ (max.)	0.50	0.30	0.22	0.16	0.14	0.12	0.12	
Characteristics at high and low temperature	Impedance ratio (max.)	Z-25°C/Z+20°C	7	4	3	2	2	2	2
		Z-40°C/Z+20°C	15	8	6	4	4	3	3
Endurance (105°C) (Applied ripple current)	Test time	2000 hours							
	Leakage current	The initial specified value or less							
	Percentage of capacitance change	Within ±20% of initial value (φ5 or less & 16V or less:±30%)							
	Tangent of loss angle	200% or less of the initial specified value							
Shelf life (105°C)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1								
Applicable standards	JIS C5101 - 1,- 18 (IEC 60384 - 1,- 18)								

### Outline Drawing

Unit : mm

φD	L	A	B	C	W	P	Size code
4	5.3±0.2	4.3	4.3	2.0	0.5 to 0.8	1.0	BC3
4	5.8±0.3	4.3	4.3	2.0	0.5 to 0.8	1.0	BC8
5	5.3±0.2	5.3	5.3	2.3	0.5 to 0.8	1.5	CC3
5	5.8±0.3	5.3	5.3	2.3	0.5 to 0.8	1.5	CC8
6.3	5.3±0.2	6.6	6.6	2.7	0.5 to 0.8	2.0	DC3
6.3	5.8±0.3	6.6	6.6	2.7	0.5 to 0.8	2.0	DC8
6.3	7.7±0.3	6.6	6.6	2.7	0.5 to 0.8	2.0	DE7
8	6.5±0.3	8.4	8.4	3.4	0.5 to 0.8	2.3	ED5
8	10±0.5	8.4	8.4	3.0	0.7 to 1.1	3.1	EH0
8	10.5±0.5	8.4	8.4	3.0	0.7 to 1.1	3.1	EH5
10	10±0.5	10.4	10.4	3.3	0.7 to 1.1	4.7	FH0
10	10.5±0.5	10.4	10.4	3.3	0.7 to 1.1	4.7	FH5

Refer to individual page.  
(Soldering conditions, Land pattern size, The taping specifications)

### Coefficient of Frequency for Rated Ripple Current

Frequency (Hz)	50 · 60	120	1k	10k · 100k
Rated voltage (V)				
6.3 to 16	0.80	1	1.15	1.25
25 to 35	0.80	1	1.25	1.40
50	0.50	1	1.35	1.50

### Product code system : 16V100F (\*For general product)

RS*	VVR	101	M	1E	DC8		U
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Taping and packing code	Additional code

For details, refer to the various "Product Code System" pages.

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

## Standard Ratings

Rated voltage(V) Rated capacitance(μF)	Item	4 (1A)			6.3 (1J)			10 (1L)			16 (1E)			25 (1T)				
		Case φD×L (mm)	Size code	Rated ripple current (mAmps)	Case φD×L (mm)	Size code	Rated ripple current (mAmps)	Case φD×L (mm)	Size code	Rated ripple current (mAmps)	Case φD×L (mm)	Size code	Rated ripple current (mAmps)	Case φD×L (mm)	Size code	Rated ripple current (mAmps)		
4.7	—	—	—	—	—	—	—	—	—	—	—	—	4×5.3	BC3	22			
6.8	—	—	—	—	—	—	—	—	—	—	—	—	4×5.3	BC3	25			
10	—	—	—	—	—	—	—	—	—	—	—	4×5.3	BC3	25				
22	—	—	—	4×5.3	BC3	26	4×5.8	BC8	33	4×5.8	BC8	27	4×5.8	BC8	36			
				4×5.8	BC8	28				4×5.8	BC8	39						
33	—	—	—	5×5.8	CC8	40	6.3×5.8	DC8	74	5×5.3	CC3	39	6.3×5.8	DC8	82			
										5×5.8	CC8	46				5×5.8	CC8	55
										5×5.8	CC8	42				5×5.8	CC8	66
47	4×5.8	BC8	42	5×5.3	CC3	46	6.3×5.8	DC8	95	6.3×5.3	DC3	70	6.3×5.8	DC8	146			
				5×5.8	CC8	48				6.3×5.8	DC8	78						
				5×5.8	CC8	70				6.3×5.8	DC8	99						
100	5×5.8	CC8	70	6.3×5.3	DC3	71	6.3×5.8	DC8	117	6.3×5.8	DC8	112	6.3×7.7	DE7	132			
				6.3×5.8	DC8	99				6.3×5.8	DC8	151	8×6.5	ED5	146			
				—	—	—				—	—	—	—	—	—	—	—	—
150	—	—	—	—	—	—	6.3×5.8	DC8	117	8×6.5	ED5	151	—	—	—			
220	6.3×5.8	DC8	121	6.3×5.8	DC8	121	6.3×7.7	DE7	156	6.3×7.7	DE7	183	8×10	EH0	320			
										8×6.5	ED5	173	8×6.5	ED5	157	8×10.5	EH5	320
330	6.3×7.7	DE7	163	6.3×7.7	DE7	163	8×10	EH0	296	8×10	EH0	291	8×10.5	EH5	340			
	8×6.5	ED5	181	8×6.5	ED5	181	8×10.5	EH5	296	8×10	EH0	291	8×10.5	EH5	340			
470	—	—	—	8×10	EH0	320	8×10	EH0	326	8×10	EH0	348	10×10.5	FH5	490			
				8×10.5	EH5	320	8×10.5	EH5	326	8×10.5	EH5	348						
680	—	—	—	8×10.5	EH5	340	10×10	FH0	440	10×10	FH0	484	—	—	—			
							10×10.5	FH5	440	10×10.5	FH5	484	—	—	—			
820	—	—	—	—	—	—	—	—	—	10×10.5	FH5	484	—	—	—			
1000	—	—	—	8×10.5	EH5	370	10×10.5	FH5	500	—	—	—	—	—	—			
				10×10	FH0	495				—	—	—						
				10×10.5	FH5	495				—	—	—						
1200	—	—	—	—	—	—	10×10.5	FH5	500	—	—	—	—	—	—			
1500	—	—	—	10×10.5	FH5	550	—	—	—	—	—	—	—	—	—			

Rated voltage(V) Rated capacitance(μF)	Item	35 (1G)			50 (1U)		
		Case φD×L (mm)	Size code	Rated ripple current (mAmps)	Case φD×L (mm)	Size code	Rated ripple current (mAmps)
1	—	—	—	4×5.3	BC3	10	
				4×5.8	BC8	12	
2.2	—	—	—	4×5.3	BC3	16	
				4×5.8	BC8	19	
3.3	—	—	—	4×5.3	BC3	16	
				4×5.8	BC8	22	
4.7	4×5.8	BC8	23	4×5.8	BC8	26	
				5×5.3	CC3	23	
				5×5.8	CC8	29	
6.8	—	—	—	5×5.3	CC3	23	
10	4×5.8	BC8	30	5×5.8	CC8	35	
	5×5.3	CC3	28	6.3×5.3	DC3	35	
	5×5.8	CC8	39	6.3×5.8	DC8	47	
22	5×5.8	CC8	52	6.3×5.8	DC8	61	
	6.3×5.3	DC3	55				
33	6.3×5.8	DC8	74	6.3×7.7	DE7	82	
	—	—	—	8×6.5	ED5	91	
47	6.3×5.8	DC8	89	6.3×7.7	DE7	97	
	—	—	—	8×6.5	ED5	108	
68	6.3×7.7	DE7	117	—	—	—	
	8×6.5	ED5	130	—	—	—	
100	6.3×7.7	DE7	142	8×10.5	EH5	230	
	8×6.5	ED5	158				
	8×10	EH0	283	10×10.5	FH5	262	
	8×10.5	EH5	283				
150	8×10	EH0	293	10×10.5	FH5	300	
	8×10.5	EH5	293				
220	8×10.5	EH5	302	10×10.5	FH5	375	
	10×10	FH0	450				
330	10×10.5	FH5	450	—	—	—	

(Note) Rated ripple current : 105° C, 120Hz

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.



Chip Type, 105°C Use, Long Life Capacitors


GREEN CAP

SMD

105°C  
3000hours

Anti-cleaning solvent

- Compatible with surface mounting.
- Supplied with carrier taping.
- Guarantees 3000 hours at 105°C. (10L:5000 hours).




Marking color : Black print

Specifications

Item	Performance
Category temperature range (°C)	-40 to +105
Tolerance at rated capacitance (%)	±20 (20°C, 120Hz)
Leakage current (µA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (µF), V : Rated voltage (V) (20°C)
Tangent of loss angle (tanδ)	Rated voltage (V)
	tanδ (max.)
Characteristics at high and low temperature	Rated voltage (V)
	Impedance ratio (max.)
Endurance (105°C) (Applied ripple current)	Test time
	Leakage current
	Percentage of capacitance change
	Tangent of the loss angle
Shelf life (105°C)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101 - 1,- 18 (IEC 60384 - 1,- 18)

Outline Drawing

Unit : mm

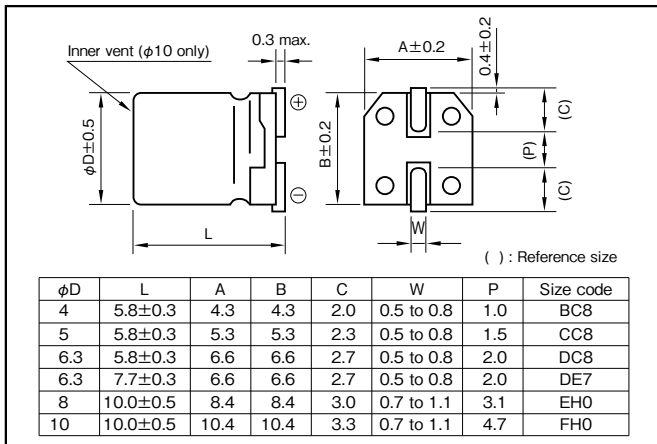

Refer to individual page.  
(Soldering conditions, Land pattern size, The taping specifications)

Coefficient of Frequency for Rated Ripple Current

Rated voltage (V)	Frequency (Hz)			
	50·60	120	1k	10k·100k
6.3 to 16	0.80	1	1.15	1.25
25 to 35	0.80	1	1.25	1.40
50	1 to 3.3µF	0.50	1	1.35
	4.7 or more	0.70	1	1.35

Product code system : 16V47µF (\*For general product)

RS*	VVC	470	M	1E	DC8		U
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Taping and packing code	Additional code

For details, refer to the various "Product Code System" pages.

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

## Standard Ratings



Rated voltage (V) Rated capacitance (μF)	Item	6.3 (1J)			10 (1L)			16 (1E)			25 (1T)			35 (1G)			50 (1U)				
		Case φD×L(mm)	Size code	Rated ripple current (mA rms)	Case φD×L(mm)	Size code	Rated ripple current (mA rms)	Case φD×L(mm)	Size code	Rated ripple current (mA rms)	Case φD×L(mm)	Size code	Rated ripple current (mA rms)	Case φD×L(mm)	Size code	Rated ripple current (mA rms)	Case φD×L(mm)	Size code	Rated ripple current (mA rms)		
1	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	4×5.8	BC8	10		
2.2	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	4×5.8	BC8	16		
3.3	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	4×5.8	BC8	17		
4.7	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—		
10	—	—	—	—	—	—	—	4×5.8	BC8	28	—	—	—	—	—	4×5.8	BC8	16	5×5.8	CC8	23
22	4×5.8	BC8	26	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
33	—	—	—	5×5.8	CC8	43	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
47	5×5.8	CC8	46	—	—	—	6.3×5.8	DC8	70	6.3×7.7	DE7	65	—	—	—	—	—	—	—	—	—
100	6.3×5.8	DC8	71	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
220	6.3×7.7	DE7	101	8×10	EH0	160	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
330	8×10	EH0	230	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
470	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
1000	10×10	FH0	313	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

(Note) Rated ripple current : 105°C, 120Hz

## Chip Type 105°C Capacitors

GREEN CAP SMD 105°C 7000hours Anti-cleaning solvent

- Compatible with surface mounting.
- Supplied with carrier taping.
- Guaranteed 7000 hours at 105°C. (φ6.3X5.8L: 5000 hours)

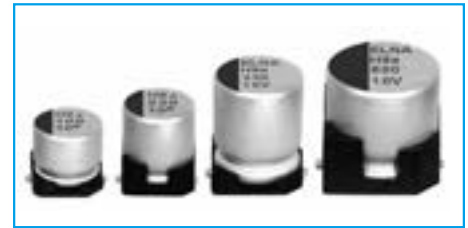

Marking color : Black print

### Specifications

Item	Performance																														
Category temperature range (°C)	-55 to +105																														
Tolerance at rated capacitance (%)	±20 (20°C, 120Hz)																														
Leakage current (μA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (μF) ; V : Rated voltage (V) (20°C)																														
Tangent of loss angle (tanδ)	<table border="1"> <thead> <tr> <th>Rated voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> </tr> </thead> <tbody> <tr> <td>tanδ (max.)</td> <td>0.32</td> <td>0.28</td> <td>0.26</td> <td>0.16</td> <td>0.14</td> </tr> </tbody> </table> <p>(20°C, 120Hz)</p>	Rated voltage (V)	6.3	10	16	25	35	tanδ (max.)	0.32	0.28	0.26	0.16	0.14																		
Rated voltage (V)	6.3	10	16	25	35																										
tanδ (max.)	0.32	0.28	0.26	0.16	0.14																										
Characteristics at high and low temperature	<table border="1"> <thead> <tr> <th rowspan="3">Impedance ratio (max.)</th> <th colspan="6">Rated voltage (V)</th> </tr> <tr> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> </tr> </thead> <tbody> <tr> <td>Z-25°C/Z+20°C</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z-40°C/Z+20°C</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> </tr> <tr> <td>Z-55°C/Z+20°C</td> <td>4</td> <td>4</td> <td>4</td> <td>4</td> <td>4</td> </tr> </tbody> </table> <p>(120Hz)</p>	Impedance ratio (max.)	Rated voltage (V)						6.3	10	16	25	35	Z-25°C/Z+20°C	2	2	2	2	2	Z-40°C/Z+20°C	3	3	3	3	3	Z-55°C/Z+20°C	4	4	4	4	4
Impedance ratio (max.)	Rated voltage (V)																														
	6.3		10	16	25	35																									
	Z-25°C/Z+20°C	2	2	2	2	2																									
Z-40°C/Z+20°C	3	3	3	3	3																										
Z-55°C/Z+20°C	4	4	4	4	4																										
Endurance (105°C) (Applied ripple current)	<table border="1"> <tbody> <tr> <td>Test time</td> <td>7000 hours (φ6.3×5.8L:5000hours)</td> </tr> <tr> <td>Leakage current</td> <td>The initial specified value or less</td> </tr> <tr> <td>Percentage of capacitance change</td> <td>Within ±30% of initial value</td> </tr> <tr> <td>Tangent of the loss angle</td> <td>300% or less of the initial specified value</td> </tr> </tbody> </table>	Test time	7000 hours (φ6.3×5.8L:5000hours)	Leakage current	The initial specified value or less	Percentage of capacitance change	Within ±30% of initial value	Tangent of the loss angle	300% or less of the initial specified value																						
Test time	7000 hours (φ6.3×5.8L:5000hours)																														
Leakage current	The initial specified value or less																														
Percentage of capacitance change	Within ±30% of initial value																														
Tangent of the loss angle	300% or less of the initial specified value																														
Shelf life (105°C)	Test time : 1000hours ; other items are the same as those for the endurance. Voltage application treatment : According to JIS C5101-4 4.1																														
Applicable standards	JIS C5101 - 1,- 18 (IEC 60384 - 1,- 18)																														

### Outline Drawing

Unit : mm

Standard Type

For Vibration Resistance Type

Inner vent (φ10 only) 0.3 max.

Dimensions: φD±0.5, L, A±0.2, B±0.2, C, W, P, 0.4±0.2

Legend: ( ) : Reference size

φD	L	A	B	C	W	P	Size code
6.3	5.8±0.3	6.6	6.6	2.7	0.5~0.8	2.0	DC8
6.3	7.7±0.3	6.6	6.6	2.7	0.5~0.8	2.0	DE7
8	10±0.5	8.4	8.4	3.0	0.7~1.1	3.1	EH0
10	10±0.5	10.4	10.4	3.3	0.7~1.1	4.7	FH0

Legend: □ : Dummy terminal

Refer to individual page.  
(Soldering conditions, Land pattern size, The taping specifications)

### Coefficient of Frequency for Rated Ripple Current

Frequency (Hz)	120	1k	10k	100k
Rated voltage (V)				
6.3 to 35	0.50	0.80	0.95	1

### Product code system (\*For general product)

Standard Type (example : 35V100μF)

RS*	VZH	101	M	1G	DE7	□	U
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Taping and packing code	Additional code

For Vibration Resistance Type (example : 35V330μF)

RS*	VMH	331	M	1G	FH0	□	U
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Taping and packing code	Additional code

For details, refer to the various "Product Code System" pages.

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

## Standard Ratings

Rated voltage(V) Rated capacitance(μF)	6.3 (1J)				10 (1L)				16 (1E)				25 (1T)				
	Item	Case φD×L (mm)	Size code	ESR (Ω max.)	Rated ripple current (mA rms)	Case φD×L (mm)	Size code	ESR (Ω max.)	Rated ripple current (mA rms)	Case φD×L (mm)	Size code	ESR (Ω max.)	Rated ripple current (mA rms)	Case φD×L (mm)	Size code	ESR (Ω max.)	Rated ripple current (mA rms)
33	—	—	—	—	—	—	—	—	—	—	—	—	—	6.3×5.8	DC8	1.10	140
47	—	—	—	—	—	—	—	—	—	6.3×5.8	DC8	1.10	140	6.3×5.8	DC8	1.10	140
100	6.3×5.8	DC8	1.10	140	6.3×5.8	DC8	1.10	140	6.3×5.8	DC8	1.10	140	6.3×7.7	DE7	1.00	230	
150	6.3×5.8	DC8	1.10	140	6.3×5.8	DC8	1.10	140	6.3×5.8	DC8	1.10	140	8×10	EH0	0.22	600	
220	6.3×7.7	DE7	1.00	230	6.3×7.7	DE7	1.00	230	6.3×7.7	DE7	1.00	230	8×10	EH0	0.22	600	
330	6.3×7.7	DE7	1.00	230	8×10	EH0	0.22	600	8×10	EH0	0.22	600	8×10	EH0	0.22	600	
470	8×10	EH0	0.22	600	8×10	EH0	0.22	600	8×10	EH0	0.22	600	8×10	EH0	0.22	600	
										10×10	FH0	0.16	850	10×10	FH0	0.16	850
680	10×10	FH0	0.16	850	10×10	FH0	0.16	850	10×10	FH0	0.16	850	—	—	—	—	
1000	10×10	FH0	0.16	850	—	—	—	—	—	—	—	—	—	—	—	—	

Rated voltage(V) Rated capacitance(μF)	35 (1G)			
	Item	Case φD×L (mm)	Size code	ESR (Ω max.)
22	6.3×5.8	DC8	1.10	140
33	6.3×5.8	DC8	1.10	140
	6.3×7.7	DE7	1.00	230
47	6.3×7.7	DE7	1.00	230
100	6.3×7.7	DE7	1.00	230
150	8×10	EH0	0.22	600
220	8×10	EH0	0.22	600
330	10×10	FH0	0.16	850

(Note) Rated ripple current : 105°C , 100kHz ; ESR : 20°C , 100kHz

**Chip Type, 105°C Use, Low ESR Capacitors**

GREEN CAP


SMD

Low ESR

105°C  
5000hours

Anti-cleaning solvent

- Compatible with surface mounting.
- Supplied with carrier taping.
- Guarantees 5000 hours at 105°C.  
 (φ8×6.5L or less : 1000hours)  
 (φ8×10L to φ10 : 2000hours)




Marking color : Black print

**Specifications**

Item	Performance																			
Category temperature range (°C)	-55 to +105																			
Tolerance at rated capacitance (%)	±20 (20°C,120Hz)																			
Leakage current (μA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (μF) ; V : Rated voltage (V) (20°C)																			
Tangent of loss angle (tanδ)	<table border="1"> <tr> <th>Rated voltage (V)</th> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> </tr> <tr> <th>tanδ (max.)</th> <td>0.28</td> <td>0.24</td> <td>0.20</td> <td>0.16</td> <td>0.14</td> </tr> </table>	Rated voltage (V)	6.3	10	16	25	35	tanδ (max.)	0.28	0.24	0.20	0.16	0.14							
	Rated voltage (V)	6.3	10	16	25	35														
tanδ (max.)	0.28	0.24	0.20	0.16	0.14															
0.02 is added to every 1000μF increase over 1000μF. (20°C,120Hz)																				
Characteristics at high and low temperature	<table border="1"> <tr> <th>Rated voltage (V)</th> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> </tr> <tr> <th rowspan="2">Impedance ratio (max.)</th> <td>Z-25°C/Z+20°C</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z-55°C/Z+20°C</td> <td>8</td> <td>5</td> <td>4</td> <td>3</td> <td>3</td> </tr> </table>	Rated voltage (V)	6.3	10	16	25	35	Impedance ratio (max.)	Z-25°C/Z+20°C	4	3	2	2	2	Z-55°C/Z+20°C	8	5	4	3	3
	Rated voltage (V)	6.3	10	16	25	35														
Impedance ratio (max.)	Z-25°C/Z+20°C	4	3	2	2	2														
	Z-55°C/Z+20°C	8	5	4	3	3														
(120Hz)																				
Endurance (105°C) (Applied ripple current)	Test time	1000 hours (φ8×6.5L or less) 2000 hours (φ8×10L to φ10) 5000 hours (φ12.5)																		
	Leakage current	The initial specified value or less																		
	Percentage of capacitance change	Within ±25% of initial value																		
	Tangent of the loss angle	200% or less of initial specified value																		
Shelf life (105°C)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1																			
Applicable standards	JIS C5101 - 1,- 18 (IEC 60384 - 1,- 18)																			

**Outline Drawing**

Unit : mm

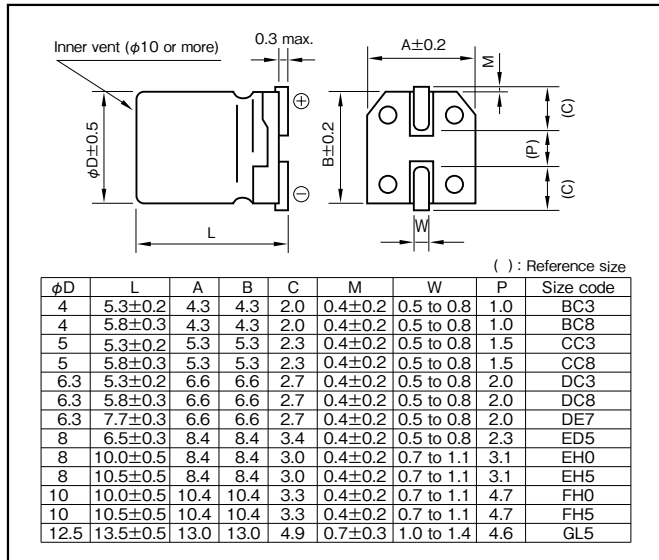

Refer to individual page.  
 (Soldering conditions, Land pattern size, The taping specifications)

**Coefficient of Frequency for Rated Ripple Current**

Frequency (Hz)	120	1k	10k	100k
Rated voltage (V)	120	1k	10k	100k
6.3 to 35	0.50	0.75	0.90	1

**Product code system (\*For general product)**

φ8×6.5L and φ6.3 or less (example : 6.3V330μF)

RS*	VVZ	331	M	1J	ED5	□	U
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Taping and packing code	Additional code

φ8×10L, φ8×10.5L (example : 10V220μF)

RS*	VVZ	221	M	1L	EH0	□	Y1U
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Taping and packing code	Additional code

φ10 (example : 16V330μF)

RS*	VVZ	331	M	1E	FH0	□	EU
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Taping and packing code	Additional code

φ12.5 (example : 25V680μF)

RS*	VVZ	681	M	1T	GL5	005	T
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Taping and packing code	Additional code

- In the case of "for High Temperature Reflow" type, a series name is "VZA". (φ4 to φ10)
- If "For Vibration Resistance" type is required, please see the series VTZ.
- For details, refer to the various "Product Code System" pages.

NOTE : Design, Specifications are subject to change without notice.  
 It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage (V) Rated capacitance (μF) Item	6.3 (1J)				10 (1L)				16 (1E)				25 (1T)				35 (1G)			
	Case φD×L (mm)	Size code	ESR (Ω max.)	Rated ripple current (mA rms)	Case φD×L (mm)	Size code	ESR (Ω max.)	Rated ripple current (mA rms)	Case φD×L (mm)	Size code	ESR (Ω max.)	Rated ripple current (mA rms)	Case φD×L (mm)	Size code	ESR (Ω max.)	Rated ripple current (mA rms)	Case φD×L (mm)	Size code	ESR (Ω max.)	Rated ripple current (mA rms)
4.7	—	—	—	—	—	—	—	—	—	—	—	—	4×5.3	BC3	3.20	65	4×5.3	BC3	3.20	65
10	—	—	—	—	4×5.3	BC3	3.20	65	4×5.3	BC3	3.20	65	4×5.8	BC8	1.80	80	5×5.3	CC3	1.50	110
													5×5.3	CC3	1.50	110	5×5.8	CC8	0.76	150
15	—	—	—	—	—	—	—	—	4×5.8	BC8	1.80	80	5×5.8	CC8	0.76	150	5×5.8	CC8	0.76	150
22	4×5.3	BC3	3.20	65	4×5.8	BC8	1.80	80	5×5.3	CC3	1.50	110	5×5.8	CC8	0.76	150	5×5.8	CC8	0.76	150
	4×5.8	BC8	1.80	80	5×5.3	CC3	1.50	110	5×5.8	CC8	0.76	150	6.3×5.3	DC3	0.85	170	6.3×5.3	DC3	0.85	170
33	5×5.3	CC3	1.50	110	5×5.3	CC3	1.50	110	6.3×5.3	DC3	0.85	170	6.3×5.3	DC3	0.85	170	6.3×5.3	DC3	0.85	170
	5×5.8	CC8	0.76	150	5×5.8	CC8	0.76	150	6.3×5.8	DC8	0.44	230	6.3×5.8	DC8	0.44	230	6.3×5.8	DC8	0.44	230
47	5×5.3	CC3	1.50	110	6.3×5.3	DC3	0.85	170	6.3×5.3	DC3	0.85	170	6.3×5.3	DC3	0.85	170	6.3×5.8	DC8	0.44	230
	5×5.8	CC8	0.76	150	6.3×5.8	DC8	0.44	230	6.3×5.8	DC8	0.44	230	6.3×5.8	DC8	0.44	230	6.3×7.7	DE7	0.34	280
68	6.3×5.8	DC8	0.44	230	6.3×5.8	DC8	0.44	230	6.3×5.8	DC8	0.44	230	6.3×5.8	DC8	0.44	230	6.3×7.7	DE7	0.34	280
																	8×6.5	ED5	0.34	280
100	6.3×5.3	DC3	0.85	170	6.3×5.3	DC3	0.85	170	6.3×5.3	DC3	0.85	170	6.3×7.7	DE7	0.34	280	8×10	EH0	0.20	450
	6.3×5.8	DC8	0.44	230	6.3×5.8	DC8	0.44	230	8×6.5	ED5	0.34	280	8×6.5	ED5	0.34	280	8×10.5	EH5	0.17	450
150	6.3×5.8	DC8	0.44	230	6.3×5.8	DC8	0.44	230	6.3×7.7	DE7	0.34	280	8×10	EH0	0.20	450	8×10.5	EH5	0.17	450
									8×6.5	ED5	0.34	280	8×10.5	EH5	0.17	450	10×10	FH0	0.10	670
220	6.3×5.8	DC8	0.44	230	6.3×7.7	DE7	0.34	280	6.3×7.7	DE7	0.34	280	8×10.5	EH5	0.17	450	8×10.5	EH5	0.17	450
	6.3×7.7	DE7	0.34	280	8×6.5	ED5	0.34	280	8×10	EH0	0.20	450	10×10	FH0	0.10	670	10×10	FH0	0.10	670
330	6.3×7.7	DE7	0.34	280	8×10.5	EH5	0.17	450	8×10.5	EH5	0.17	450	8×10.5	EH5	0.17	450	10×10.5	FH5	0.09	670
	8×6.5	ED5	0.34	280	10×10	FH0	0.10	670	10×10	FH0	0.10	670	10×10	FH0	0.10	670				
470	8×10.5	EH5	0.17	450	8×10.5	EH5	0.17	450	8×10.5	EH5	0.17	450	10×10.5	FH5	0.09	670	12.5×13.5	GL5	0.06	1100
	10×10	FH0	0.10	670	10×10	FH0	0.10	670	10×10	FH0	0.10	670								
680	8×10.5	EH5	0.17	450	10×10.5	FH5	0.09	670	10×10.5	FH5	0.09	670	12.5×13.5	GL5	0.06	1100	12.5×13.5	GL5	0.06	1100
1000	8×10.5	EH5	0.17	450	10×10.5	FH5	0.09	670	12.5×13.5	GL5	0.06	1100	12.5×13.5	GL5	0.06	1100	—	—	—	—
	10×10	FH0	0.10	670																
1500	10×10.5	FH5	0.09	670	12.5×13.5	GL5	0.06	1100	12.5×13.5	GL5	0.06	1100	—	—	—	—	—	—	—	
2200	12.5×13.5	GL5	0.06	1100	12.5×13.5	GL5	0.06	1100	—	—	—	—	—	—	—	—	—	—	—	
2700	12.5×13.5	GL5	0.06	1100	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	


(Note) Rated ripple current : 105°C, 100kHz ; ESR : 20°C, 100kHz

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Chip Type, 105°C Use, Low ESR, Long Life Capacitors

GREEN CAP SMD Low ESR 105°C 5000hours Anti-cleaning solvent

- Compatible with surface mounting.
- Supplied with carrier taping.
- Guarantees 2000 hours at 105°C.  
(6.3V to 50V 10.0L,10.5L:5000 hours)  
(φ12.5 : 5000 hours)



Marking color : Black print

Specifications

Item	Performance																																						
Category temperature range (°C)	-55 to +105																																						
Tolerance at rated capacitance (%)	±20 (20°C,120Hz)																																						
Leakage current (μA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (μF) , V : Rated voltage (V) (20°C)																																						
Tangent of loss angle (tanδ)	<table border="1"> <thead> <tr> <th>Rated voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>80</th> <th>100</th> </tr> </thead> <tbody> <tr> <td>tanδ (max.)</td> <td>0.26</td> <td>0.19</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> <td>0.08</td> <td>0.08</td> <td>0.07</td> </tr> </tbody> </table> <p>0.02 is added to every 1000μF increase over 1000μF. (20°C,120Hz)</p>	Rated voltage (V)	6.3	10	16	25	35	50	63	80	100	tanδ (max.)	0.26	0.19	0.16	0.14	0.12	0.10	0.08	0.08	0.07																		
Rated voltage (V)	6.3	10	16	25	35	50	63	80	100																														
tanδ (max.)	0.26	0.19	0.16	0.14	0.12	0.10	0.08	0.08	0.07																														
Characteristics at high and low temperature	<table border="1"> <thead> <tr> <th>Rated voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>80</th> <th>100</th> </tr> </thead> <tbody> <tr> <td rowspan="3">Impedance ratio (max.)</td> <td>Z-25°C/Z+20°C</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z-40°C/Z+20°C</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> </tr> <tr> <td>Z-55°C/Z+20°C</td> <td>8</td> <td>4</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> </tr> </tbody> </table> <p>(120Hz)</p>	Rated voltage (V)	6.3	10	16	25	35	50	63	80	100	Impedance ratio (max.)	Z-25°C/Z+20°C	2	2	2	2	2	2	2	2	Z-40°C/Z+20°C	3	3	3	3	3	3	3	3	Z-55°C/Z+20°C	8	4	4	3	3	3	3	3
Rated voltage (V)	6.3	10	16	25	35	50	63	80	100																														
Impedance ratio (max.)	Z-25°C/Z+20°C	2	2	2	2	2	2	2	2																														
	Z-40°C/Z+20°C	3	3	3	3	3	3	3	3																														
	Z-55°C/Z+20°C	8	4	4	3	3	3	3	3																														
Endurance (105°C) (Applied ripple current)	<table border="1"> <tbody> <tr> <td>Test time</td> <td>2000 hours (φ12.5, 6.3V to 50V 10.0L,10.5L : 5000 hours)</td> </tr> <tr> <td>Leakage current</td> <td>The initial specified value or less</td> </tr> <tr> <td>Percentage of capacitance change</td> <td>Within ±30% of initial value</td> </tr> <tr> <td>Tangent of the loss angle</td> <td>200% or less of the initial specified value (φ12.5, 6.3V to 50V 10.0L,10.5L : 300% or less)</td> </tr> </tbody> </table>	Test time	2000 hours (φ12.5, 6.3V to 50V 10.0L,10.5L : 5000 hours)	Leakage current	The initial specified value or less	Percentage of capacitance change	Within ±30% of initial value	Tangent of the loss angle	200% or less of the initial specified value (φ12.5, 6.3V to 50V 10.0L,10.5L : 300% or less)																														
Test time	2000 hours (φ12.5, 6.3V to 50V 10.0L,10.5L : 5000 hours)																																						
Leakage current	The initial specified value or less																																						
Percentage of capacitance change	Within ±30% of initial value																																						
Tangent of the loss angle	200% or less of the initial specified value (φ12.5, 6.3V to 50V 10.0L,10.5L : 300% or less)																																						
Shelf life (105°C)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1																																						
Applicable standards	JIS C5101 - 1,- 18 (IEC 60384 - 1,- 18)																																						

Outline Drawing

Unit : mm

φD	L	A	B	C	M	W	P	Size code
4	5.8±0.3	4.3	4.3	2.0	0.4±0.2	0.5 to 0.8	1.0	BC8
5	5.8±0.3	5.3	5.3	2.3	0.4±0.2	0.5 to 0.8	1.5	CC8
6.3	5.8±0.3	6.6	6.6	2.7	0.4±0.2	0.5 to 0.8	2.0	DC8
6.3	7.7±0.3	6.6	6.6	2.7	0.4±0.2	0.5 to 0.8	2.0	DE7
8	6.5±0.3	8.4	8.4	3.4	0.4±0.2	0.5 to 0.8	2.3	ED5
8	10±0.5	8.4	8.4	3.0	0.4±0.2	0.7 to 1.1	3.1	EH0
8	10.5±0.5	8.4	8.4	3.0	0.4±0.2	0.7 to 1.1	3.1	EH5
10	10±0.5	10.4	10.4	3.3	0.4±0.2	0.7 to 1.1	4.7	FH0
10	10.5±0.5	10.4	10.4	3.3	0.4±0.2	0.7 to 1.1	4.7	FH5
12.5	13.5±0.5	13.0	13.0	4.9	0.7±0.3	1.0 to 1.4	4.6	GL5

Refer to individual page.  
(Soldering conditions, Land pattern size, The taping specifications)

Coefficient of Frequency for Rated Ripple Current

Frequency (Hz)	50 · 60	120	1k	10k · 100k
Rated voltage (V)				
6.3 to 100	0.50	0.50	0.75	1

Product code system (\*For general product)

φ10 or less (example : 16V100μF)

RS*	VVD	101	M	1E	DC8		U
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Taping and packing code	Additional code

φ12.5 (example : 16V1000μF)

RS*	VVD	102	M	1E	GL5	005	T
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Taping and packing code	Additional code

- In the case of "for High Temperature Reflow" type, a series name is "VZB". (φ4 to φ10)
- If "For Vibration Resistance" type is required, please see the series VTD.
- For details, refer to the various "Product Code System" pages.

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

## Standard Ratings

Rated voltage (V)	Item	6.3 (1J)				10 (1L)				16 (1E)			
		Case φD×L (mm)	Size code	ESR (Ω max.)	Rated ripple current (mA <sub>rms</sub> )	Case φD×L (mm)	Size code	ESR (Ω max.)	Rated ripple current (mA <sub>rms</sub> )	Case φD×L (mm)	Size code	ESR (Ω max.)	Rated ripple current (mA <sub>rms</sub> )
10	—	—	—	—	—	—	—	—	—	4×58	BC8	1.35	90
22	4×58	BC8	1.35	90	4×58	BC8	1.35	90	4×58	BC8	1.35	90	
									5×58	CC8	0.70	170	
33	—	—	—	—	4×58	BC8	1.35	90	—	—	—	—	
					5×58	CC8	0.70	170	—	—	—	—	
47	4×58	BC8	1.35	90	—	—	—	—	5×58	CC8	0.70	170	
	5×58	CC8	0.70	170	—	—	—	—	6.3×58	DC8	0.36	250	
100	5×58	CC8	0.70	170	—	—	—	—	6.3×58	DC8	0.36	250	
	6.3×58	DC8	0.36	250	—	—	—	—	—	—	—	—	
220	6.3×58	DC8	0.36	250	6.3×7.7	DE7	0.30	300	6.3×7.7	DE7	0.30	300	
					8×6.5	ED5	0.30	300	8×6.5	ED5	0.30	300	
330	6.3×7.7	DE7	0.30	300	8×10	EH0	0.16	600	8×10	EH0	0.16	600	
	8×6.5	ED5	0.30	300	—	—	—	—	—	—	—	—	
470	8×10	EH0	0.16	600	8×10	EH0	0.16	600	8×10	EH0	0.16	600	
680	—	—	—	—	8×10	EH0	0.16	600	10×10	FH0	0.090	850	
					—	—	—	—	10×10.5	FH5	0.080	850	
1000	8×10	EH0	0.16	600	10×10	FH0	0.090	850	125×135	GL5	0.054	1160	
					10×10.5	FH5	0.080	850	—	—	—	—	
1500	10×10	FH0	0.090	850	125×135	GL5	0.054	1160	125×135	GL5	0.054	1160	
	10×10.5	FH5	0.080	850	—	—	—	—	—	—	—	—	
2200	125×135	GL5	0.054	1160	125×135	GL5	0.054	1160	—	—	—	—	

Rated voltage (V)	Item	25 (1T)				35 (1G)				50 (1U)			
		Case φD×L (mm)	Size code	ESR (Ω max.)	Rated ripple current (mA <sub>rms</sub> )	Case φD×L (mm)	Size code	ESR (Ω max.)	Rated ripple current (mA <sub>rms</sub> )	Case φD×L (mm)	Size code	ESR (Ω max.)	Rated ripple current (mA <sub>rms</sub> )
4.7	—	—	—	—	4×58	BC8	1.35	90	4×58	BC8	2.7	60	
10	4×58	BC8	1.35	90	4×58	BC8	1.35	90	5×58	CC8	1.5	90	
					5×58	CC8	0.70	170	6.3×58	DC8	0.86	170	
22	5×58	CC8	0.70	170	5×58	CC8	0.70	170	6.3×58	DC8	0.86	170	
33	5×58	CC8	0.70	170	6.3×58	DC8	0.36	250	6.3×7.7	DE7	0.66	195	
	6.3×58	DC8	0.36	250	—	—	—	—	8×6.5	ED5	0.63	200	
47	6.3×58	DC8	0.36	250	6.3×58	DC8	0.36	250	6.3×7.7	DE7	0.66	195	
					—	—	—	—	8×6.5	ED5	0.63	200	
100	6.3×7.7	DE7	0.30	300	6.3×7.7	DE7	0.30	300	8×10	EH0	0.34	350	
	8×6.5	ED5	0.30	300	8×10	EH0	0.16	600	8×10.5	EH5	0.32	350	
220	8×10	EH0	0.16	600	8×10	EH0	0.16	600	10×10	FH0	0.20	700	
					—	—	—	—	10×10.5	FH5	0.18	700	
330	8×10	EH0	0.16	600	10×10	FH0	0.090	850	125×135	GL5	0.12	900	
					10×10.5	FH5	0.080	850	—	—	—	—	
470	10×10	FH0	0.090	850	125×135	GL5	0.054	1160	—	—	—	—	
	10×10.5	FH5	0.080	850	—	—	—	—	—	—	—	—	
680	125×135	GL5	0.054	1160	125×135	GL5	0.054	1160	—	—	—	—	
1000	125×135	GL5	0.054	1160	—	—	—	—	—	—	—	—	

Rated voltage (V)	Item	63 (4E)				80 (1R)				100 (1H)			
		Case φD×L (mm)	Size code	ESR (Ω max.)	Rated ripple current (mA <sub>rms</sub> )	Case φD×L (mm)	Size code	ESR (Ω max.)	Rated ripple current (mA <sub>rms</sub> )	Case φD×L (mm)	Size code	ESR (Ω max.)	Rated ripple current (mA <sub>rms</sub> )
4.7	5×5.8	CC8	3.0	50	—	—	—	—	—	—	—	—	
10	6.3×5.8	DC8	1.5	80	6.3×7.7	DE7	2.4	60	—	—	—	—	
22	6.3×7.7	DE7	1.2	120	8×10	EH0	0.90	130	8×10	EH0	1.30	130	
33	8×10	EH0	0.65	250	8×10	EH0	0.90	130	10×10	FH0	0.70	200	
47	8×10	EH0	0.65	250	10×10	FH0	0.50	200	—	—	—	—	
68	8×10	EH0	0.65	250	—	—	—	—	—	—	—	—	
100	10×10	FH0	0.35	400	125×135	GL5	0.18	550	—	—	—	—	
	125×135	GL5	0.16	600	—	—	—	—	—	—	—	—	
220	125×135	GL5	0.16	600	—	—	—	—	—	—	—	—	

(Note) Rated ripple current : 105°C, 100kHz  
ESR : 20°C, 100kHz

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.



### Chip Type, 105°C Use, Low ESR Capacitors

GREEN CAP


SMD

Low ESR

105°C 2000hours

Anti-cleaning solvent

- Compatible with surface mounting.
- Supplied with carrier taping.
- Guarantees 2000 hours at 105°C.




Marking color : Black print

### Specifications

Item	Performance																										
Category temperature range (°C)	-55 to +105																										
Tolerance at rated capacitance (%)	±20 (20°C, 120Hz)																										
Leakage current (µA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (µF), V : Rated voltage (V) (20°C)																										
Tangent of loss angle (tanδ)	<table border="1"> <thead> <tr> <th>Rated voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> </tr> </thead> <tbody> <tr> <td>tanδ (max.)</td> <td>0.26</td> <td>0.19</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> </tr> </tbody> </table> <p>(20°C, 120Hz)</p>	Rated voltage (V)	6.3	10	16	25	35	50	tanδ (max.)	0.26	0.19	0.16	0.14	0.12	0.10												
Rated voltage (V)	6.3	10	16	25	35	50																					
tanδ (max.)	0.26	0.19	0.16	0.14	0.12	0.10																					
Characteristics at high and low temperature	<table border="1"> <thead> <tr> <th>Rated voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> </tr> </thead> <tbody> <tr> <td rowspan="3">Impedance ratio (max.)</td> <td>Z-25°C/Z+20°C</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z-40°C/Z+20°C</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> </tr> <tr> <td>Z-55°C/Z+20°C</td> <td>4</td> <td>4</td> <td>4</td> <td>3</td> <td>3</td> </tr> </tbody> </table> <p>(120Hz)</p>	Rated voltage (V)	6.3	10	16	25	35	50	Impedance ratio (max.)	Z-25°C/Z+20°C	2	2	2	2	2	Z-40°C/Z+20°C	3	3	3	3	3	Z-55°C/Z+20°C	4	4	4	3	3
Rated voltage (V)	6.3	10	16	25	35	50																					
Impedance ratio (max.)	Z-25°C/Z+20°C	2	2	2	2	2																					
	Z-40°C/Z+20°C	3	3	3	3	3																					
	Z-55°C/Z+20°C	4	4	4	3	3																					
Endurance (105°C) (Applied ripple current)	<table border="1"> <tbody> <tr> <td>Test time</td> <td>2000 hours</td> </tr> <tr> <td>Leakage current</td> <td>The initial specified value or less</td> </tr> <tr> <td>Percentage of capacitance change</td> <td>Within ±30% of initial value</td> </tr> <tr> <td>Tangent of the loss angle</td> <td>200% or less of initial specified value</td> </tr> </tbody> </table>	Test time	2000 hours	Leakage current	The initial specified value or less	Percentage of capacitance change	Within ±30% of initial value	Tangent of the loss angle	200% or less of initial specified value																		
Test time	2000 hours																										
Leakage current	The initial specified value or less																										
Percentage of capacitance change	Within ±30% of initial value																										
Tangent of the loss angle	200% or less of initial specified value																										
Shelf life (105°C)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1																										
Applicable standards	JIS C5101 - 1,- 18 (IEC 60384 - 1,- 18)																										

### Outline Drawing

Unit : mm

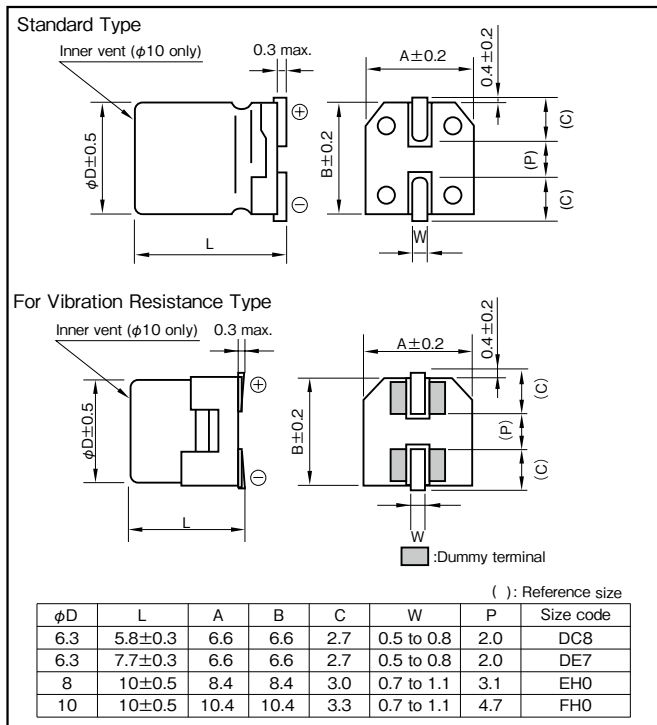

Refer to individual page.  
(Soldering conditions, Land pattern size, The taping specifications)

### Coefficient of Frequency for Rated Ripple Current

Frequency (Hz)	50 · 60	120	1k	10k · 100k
Rated voltage (V)	0.50	0.50	0.75	1
6.3 to 50				

### Product code system (\*For general product)

Standard Type (example : 16V100µF)

RS*	VVV	101	M	1E	DC8		U
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Taping and packing code	Additional code

For Vibration Resistance Type (example : 25V470µF)

RS*	VTV	471	M	1T	FH0		U
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Taping and packing code	Additional code

For details, refer to the various "Product Code System" pages.

### Standard Ratings

Rated voltage (V) Item Rated capacitance (μF)	6.3 (1J)				10 (1L)				16 (1E)			
	Case φD × L (mm)	Size code	ESR (Ω max.)	Rated ripple current (mA rms)	Case φD × L (mm)	Size code	ESR (Ω max.)	Rated ripple current (mA rms)	Case φD × L (mm)	Size code	ESR (Ω max.)	Rated ripple current (mA rms)
47	—	—	—	—	—	—	—	—	6.3 × 5.8	DC8	0.26	300
100	6.3 × 5.8	DC8	0.26	300	—	—	—	—	6.3 × 5.8	DC8	0.26	300
									6.3 × 7.7	DE7	0.16	600
220	6.3 × 5.8	DC8	0.26	300	6.3 × 7.7	DE7	0.16	600	6.3 × 7.7	DE7	0.16	600
330	6.3 × 7.7	DE7	0.16	600	8 × 10	EH0	0.09	850	8 × 10	EH0	0.09	850
470	8 × 10	EH0	0.09	850	8 × 10	EH0	0.09	850	8 × 10	EH0	0.09	850
680	—	—	—	—	8 × 10	EH0	0.09	850	10 × 10	FH0	0.07	1190
1000	8 × 10	EH0	0.09	850	10 × 10	FH0	0.07	1190	—	—	—	—
1500	10 × 10	FH0	0.07	1190	—	—	—	—	—	—	—	—

Rated voltage (V) Item Rated capacitance (μF)	25 (1T)				35 (1G)				50 (1U)			
	Case φD × L (mm)	Size code	ESR (Ω max.)	Rated ripple current (mA rms)	Case φD × L (mm)	Size code	ESR (Ω max.)	Rated ripple current (mA rms)	Case φD × L (mm)	Size code	ESR (Ω max.)	Rated ripple current (mA rms)
33	6.3 × 5.8	DC8	0.26	300	6.3 × 5.8	DC8	0.26	300	—	—	—	—
47	6.3 × 5.8	DC8	0.26	300	6.3 × 5.8	DC8	0.26	300	—	—	—	—
100	6.3 × 7.7	DE7	0.16	600	6.3 × 7.7	DE7	0.16	600	8 × 10	EH0	0.18	670
					8 × 10	EH0	0.09	850				
220	8 × 10	EH0	0.09	850	8 × 10	EH0	0.09	850	8 × 10	EH0	0.18	670
330	8 × 10	EH0	0.09	850	10 × 10	FH0	0.07	1190	—	—	—	—
470	10 × 10	FH0	0.07	1190	—	—	—	—	—	—	—	—

(Note) Rated ripple current : 105°C , 100kHz  
ESR : 20°C , 100kHz

## Chip Type, 105°C Use, Low ESR, High CV Capacitors

GREEN CAP


SMD

Low ESR

105°C  
2000hours

Anti-cleaning solvent

- Compatible with surface mounting.
- Supplied with carrier taping.
- Guaranteed 2000 hours at 105°C.




Marking color : Black print

### Specifications

Item	Performance							
Category temperature range (°C)	-55 to +105							
Tolerance at rated capacitance (%)	±20 (20°C, 120Hz)							
Leakage current (µA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (µF), V : Rated voltage (V) (20°C)							
Tangent of loss angle (tanδ)	Rated voltage (V)	6.3	10	16	25	35	50	
	tanδ (max.)	0.26	0.19	0.16	0.14	0.12	0.10	
0.02 is added to every 1000µF increase over 1000µF. (20°C, 120Hz)								
Characteristics at high and low temperature	Impedance ratio (max.)	Rated voltage (V)	6.3	10	16	25	35	50
		Z-25°C/Z+20°C	2	2	2	2	2	2
		Z-40°C/Z+20°C	3	3	3	3	3	3
		Z-55°C/Z+20°C	4	4	4	3	3	3
(120Hz)								
Endurance (105°C) (Applied ripple current)	Test time	2000 hours						
	Leakage current	The initial specified value or less						
	Percentage of capacitance change	Within ±30% of initial value						
	Tangent of the loss angle	200% or less of the initial specified value						
Shelf life (105°C)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1							
Applicable standards	JIS C5101 - 1,- 18 (IEC 60384 - 1,- 18)							

### Outline Drawing

Unit : mm

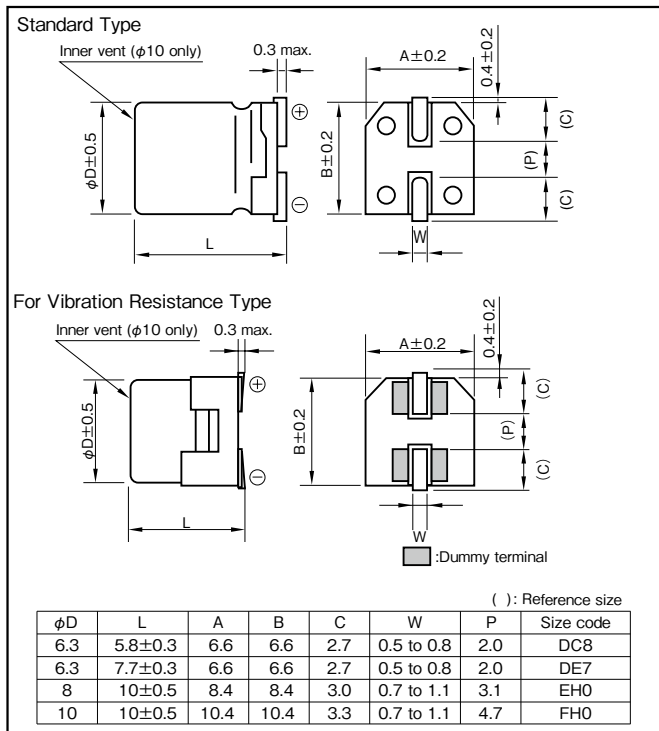

Refer to individual page.  
(Soldering conditions, Land pattern size, The taping specifications)

### Coefficient of Frequency for Rated Ripple Current

Frequency (Hz)	50 · 60	120	1k	10k · 100k
Rated voltage (V)	0.50	0.50	0.75	1
6.3 to 50				

### Product code system (\*For general product)

Standard Type (example : 35V150µF)

RS*	VZD	151	M	1G	DE7		U
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Taping and packing code	Additional code

For Vibration Resistance Type (example : 25V820µF)

RS*	VMD	821	M	1T	FH0		U
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Taping and packing code	Additional code

For details, refer to the various "Product Code System" pages.

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

## Standard Ratings

Rated voltage (V) Item Rated capacitance (μF)	6.3 (1J)				10 (1L)				16 (1E)			
	Case φD × L (mm)	Size code	ESR (Ω max.)	Rated ripple current (mA rms)	Case φD × L (mm)	Size code	ESR (Ω max.)	Rated ripple current (mA rms)	Case φD × L (mm)	Size code	ESR (Ω max.)	Rated ripple current (mA rms)
150	—	—	—	—	—	—	—	—	6.3 × 5.8	DC8	0.26	300
220	—	—	—	—	6.3 × 5.8	DC8	0.26	300	6.3 × 5.8	DC8	0.26	300
330	6.3 × 5.8	DC8	0.26	300	6.3 × 7.7	DE7	0.16	600	6.3 × 7.7	DE7	0.16	600
470	6.3 × 7.7	DE7	0.16	600	6.3 × 7.7	DE7	0.16	600	—	—	—	—
680	6.3 × 7.7	DE7	0.16	600	—	—	—	—	8 × 10	EH0	0.08	850
1000	—	—	—	—	8 × 10	EH0	0.08	850	10 × 10	FH0	0.06	1190
1500	8 × 10	EH0	0.08	850	10 × 10	FH0	0.06	1190	—	—	—	—
2200	10 × 10	FH0	0.06	1190	—	—	—	—	—	—	—	—


Rated voltage (V) Item Rated capacitance (μF)	25 (1T)				35 (1G)				50 (1U)			
	Case φD × L (mm)	Size code	ESR (Ω max.)	Rated ripple current (mA rms)	Case φD × L (mm)	Size code	ESR (Ω max.)	Rated ripple current (mA rms)	Case φD × L (mm)	Size code	ESR (Ω max.)	Rated ripple current (mA rms)
47	—	—	—	—	—	—	—	—	6.3 × 5.8	DC8	0.68	195
100	—	—	—	—	6.3 × 5.8	DC8	0.26	300	6.3 × 7.7	DE7	0.34	350
150	6.3 × 5.8	DC8	0.26	300	6.3 × 7.7	DE7	0.16	600	—	—	—	—
220	6.3 × 7.7	DE7	0.16	600	—	—	—	—	8 × 10	EH0	0.18	670
330	—	—	—	—	8 × 10	EH0	0.08	850	10 × 10	FH0	0.12	900
470	8 × 10	EH0	0.08	850	—	—	—	—	—	—	—	—
560	—	—	—	—	10 × 10	FH0	0.06	1190	—	—	—	—
820	10 × 10	FH0	0.06	1190	—	—	—	—	—	—	—	—

(Note) Rated ripple current : 105°C , 100kHz  
ESR : 20°C , 100kHz

## Chip Type, 105°C Use, Low ESR, High CV Capacitors

GREEN CAP SMD Low ESR 105°C 2000hours Anti-cleaning solvent

- Compatible with surface mounting.
- Supplied with carrier taping.
- Guaranteed 2000 hours at 105°C .



Marking color : Black print

### Specifications

Item	Performance			
Category temperature range (°C)	- 55 to + 105			
Tolerance at rated capacitance (%)	± 20 (20°C , 120Hz)			
Leakage current (µA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (µF) ; V : Rated voltage (V) (20°C)			
Tangent of loss angle (tanδ)	Rated voltage (V)	25	35	
	tan δ (max.)	0.14	0.12	
0.02 is added to every 1000µF increase over 1000µF (20°C , 120Hz)				
Characteristics at high and low temperature	Impedance ratio (max.)	Rated voltage (V)	25	35
		Z - 25°C / Z + 20°C	2	2
		Z - 40°C / Z + 20°C	3	3
		Z - 55°C / Z + 20°C	3	3
(120Hz)				
Endurance (105°C) (Applied ripple current)	Test time	2000 hours		
	Leakage current	The initial specified value or less		
	Percentage of capacitance change	Within ± 30% of initial value		
	Tangent of the loss angle	200% or less of the initial specified value		
Shelf life (105°C)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1			
Applicable standards	JIS C5101-1, -18 (IEC 60384-1, -18)			

### Coefficient of Frequency for Rated Ripple Current

Frequency (Hz)	50 · 60	120	1k	10k · 100k
Rated voltage (V)				
25 to 35	0.50	0.50	0.75	1

Refer to individual page.  
(Soldering conditions, Land pattern size, The taping specifications)

### Product code system (\*For general product)

Standard Type (example : 35V680µF)

RS*	VZK	681	M	1G	FH0		U
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Taping and packing code	Additional code

For Vibration Resistance Type (example : 35V680µF)

RS*	VMK	681	M	1G	FH0		U
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Taping and packing code	Additional code

For details, refer to the various "Product Code System" pages.

### Outline Drawing

Unit : mm

#### Standard Type

#### For Vibration Resistance Type

( ) : Reference size

φD	L	A	B	C	W	P	Size code
8	10 ± 0.5	8.4	8.4	3.0	0.7 to 1.1	3.1	EH0
10	10 ± 0.5	10.4	10.4	3.3	0.7 to 1.1	4.7	FH0

### Standard Ratings

Rated voltage (V)	25 (1T)				35 (1G)			
	Case φD × L (mm)	Size code	ESR (Ω max.)	Rated ripple current (mArms)	Case φD × L (mm)	Size code	ESR (Ω max.)	Rated ripple current (mArms)
470	—	—	—	—	8 × 10	EH0	0.08	850
560	8 × 10	EH0	0.08	850	—	—	—	—
680	—	—	—	—	10 × 10	FH0	0.06	1190
1000	10 × 10	FH0	0.06	1190	—	—	—	—


(Note) Rated ripple current : 105°C , 100kHz  
ESR : 20°C , 100kHz

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Chip Type, 125°C Use, Low ESR, Long Life Capacitors

GREEN CAP SMD Low ESR 125°C 5000hours Anti-cleaning solvent

- Compatible with surface mounting.
  - Supplied with carrier taping.
  - Guaranteed 1000 to 5000 hours at 125°C.
- (See table below)



Marking color : Black print

Specifications

Item	Performance
Category temperature range (°C)	-40 to +125
Tolerance at rated capacitance (%)	±20 (20°C, 120Hz)
Leakage current (µA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (µF) ; V : Rated voltage (V) (20°C)
Tangent of loss angle (tanδ)	Rated voltage (V)
	tanδ (max.)
Characteristics at high and low temperature	Rated voltage (V)
	Impedance Ratio (max.)
Endurance (125°C) (Applied ripple current)	Test time
	Leakage current
	Capacitance change
	Tangent of loss angle
Shelf life (125°C)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101 - 1, - 18 (IEC 60384 - 1, - 18)

Outline Drawing

Unit : mm

phi D	L	A	B	C	M	W	P	Size code
4	5.8±0.3	4.3	4.3	2.0	0.4±0.2	0.5 to 0.8	1.0	BC8
5	5.8±0.3	5.3	5.3	2.3	0.4±0.2	0.5 to 0.8	1.5	CC8
6.3	5.8±0.3	6.6	6.6	2.7	0.4±0.2	0.5 to 0.8	2.0	DC8
6.3	7.7±0.3	6.6	6.6	2.7	0.4±0.2	0.5 to 0.8	2.0	DE7
8	6.5±0.3	8.4	8.4	3.4	0.4±0.2	0.5 to 0.8	2.3	ED5
8	10±0.5	8.4	8.4	3.0	0.4±0.2	0.7 to 1.1	3.1	EH0
10	10±0.5	10.4	10.4	3.3	0.4±0.2	0.7 to 1.1	4.7	FH0
12.5	13.5±0.5	13.0	13.0	4.9	0.7±0.3	1.0 to 1.4	4.6	GL5

Refer to individual page.  
(Soldering conditions, Land pattern size, The taping specifications)

Coefficient of Frequency for Rated Ripple Current

Frequency (Hz)	120	1k	10k	100k
Rated voltage(V)				
10 to 100	0.77	0.88	0.96	1

Product code system (\*For general product)

phi 10 or less (example : 16V100µF)

RS*	VVT	101	M	1E	FH0		U
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Taping and packing code	Additional code

50V or less : phi 12.5 (example : 35V330µF)

RS*	VVT	331	M	1G	GL5		T
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Taping and packing code	Additional code

63V to 100V : phi 12.5 (example : 63V100µF)

RS*	VVT	101	M	4E	GL5		KT
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Taping and packing code	Additional code

- In the case of "for High Temperature Reflow" type, a series name is "VZC". (phi 4 to phi 10)
- If "For Vibration Resistance" type is required, please see the series VTT.
- For details, refer to the various "Product Code System" pages.

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

**Standard Ratings**

Rated voltage(V) Rated capacitance(μF)	Item	10 (1L)				16 (1E)				25 (1T)			
		Case φD×L (mm)	ESR(Ω max.)		Rated ripple current (mA rms)	Case φD×L (mm)	ESR(Ω max.)		Rated ripple current (mA rms)	Case φD×L (mm)	ESR(Ω max.)		Rated ripple current (mA rms)
			20°C	-40°C			20°C	-40°C			20°C	-40°C	
10	—	—	—	—	4×5.8	3.0	45	50	5×5.8	1.5	23	81	
22	4×5.8	3.0	45	50	5×5.8	1.5	23	81	6.3×5.8	1.0	15	114	
33	5×5.8	1.5	23	81	6.3×5.8	1.0	15	114	6.3×5.8	1.0	15	114	
47	—	—	—	—	6.3×5.8	1.0	15	114	6.3×7.7	0.60	9.0	165	
									8×6.5	0.60	9.0	180	
100	—	—	—	—	—	—	—	—	6.3×7.7	0.60	9.0	165	
									8×6.5	0.60	9.0	180	
									8×10	0.20	2.0	340	
220	6.3×7.7	0.60	9.0	165	8×10	0.20	2.0	340	8×10	0.20	2.0	340	
	8×6.5	0.60	9.0	180	10×10	0.15	1.5	500	10×10	0.15	1.5	500	
330	8×10	0.20	2.0	340	10×10	0.15	1.5	500	10×10	0.15	1.5	500	
	10×10	0.15	1.5	500					12.5×13.5	0.086	1.29	750	
470	10×10	0.15	1.5	500	12.5×13.5	0.086	1.29	750	12.5×13.5	0.086	1.29	750	
680	12.5×13.5	0.086	1.29	750	12.5×13.5	0.086	1.29	750	—	—	—	—	
1000	12.5×13.5	0.086	1.29	750	—	—	—	—	—	—	—	—	

Rated voltage(V) Rated capacitance(μF)	Item	35 (1G)				50 (1U)				63 (4E)			
		Case φD×L (mm)	ESR(Ω max.)		Rated ripple current (mA rms)	Case φD×L (mm)	ESR(Ω max.)		Rated ripple current (mA rms)	Case φD×L (mm)	ESR(Ω max.)		Rated ripple current (mA rms)
			20°C	-40°C			20°C	-40°C			20°C	-40°C	
4.7	4×5.8	3.0	45	50	—	—	—	—	—	—	—	—	
10	5×5.8	1.5	23	81	6.3×5.8	3.2	48	58	6.3×7.7	1.8	36	95	
	6.3×5.8	1.0	15	114									
22	6.3×5.8	1.0	15	114	6.3×7.7	1.2	18	95	8×10	0.70	14	140	
33	6.3×7.7	0.60	9.0	165	6.3×7.7	1.2	18	95	8×10	0.70	14	140	
	8×6.5	0.60	9.0	180	8×10	0.50	7.5	180	10×10	0.50	10	200	
47	6.3×7.7	0.60	9.0	165	8×10	0.50	7.5	180	8×10	0.70	14	140	
	8×6.5	0.60	9.0	180									
	8×10	0.20	2.0	340									
100	8×10	0.20	2.0	340	10×10	0.30	4.5	280	12.5×13.5	0.25	3.75	400	
	10×10	0.15	1.5	500	12.5×13.5	0.18	2.7	550					
220	10×10	0.15	1.5	500	12.5×13.5	0.18	2.7	550	—	—	—	—	
330	12.5×13.5	0.086	1.29	750	—	—	—	—	—	—	—	—	

Rated voltage(V) Rated capacitance(μF)	Item	80 (1R)				100 (1H)			
		Case φD×L (mm)	ESR(Ω max.)		Rated ripple current (mA rms)	Case φD×L (mm)	ESR(Ω max.)		Rated ripple current (mA rms)
			20°C	-40°C			20°C	-40°C	
10	8×10	0.75	15	110	8×10	0.75	15	110	
22	8×10	0.75	15	110	8×10	0.75	15	110	
	10×10	0.55	11	150	10×10	0.55	11	150	
33	8×10	0.75	15	110	10×10	0.55	11	150	
	10×10	0.55	11	150					
47	—	—	—	—	12.5×13.5	0.32	4.8	300	

(Note) Rated ripple current : 125°C, 100kHz  
ESR : 100kHz

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

### Chip Type, 125°C Use, Low ESR, Long Life Capacitors

GREEN CAP


SMD

Low ESR

125°C  
3000hours

Anti-cleaning solvent

- Compatible with surface mounting.
- Supplied with carrier taping.
- Guaranteed 3000 hours at 125°C. (φ6.3 : 2000 hours)
- Specify ESR after endurance test.




Marking color : Black print

### Specifications

Item	Performance						
Category temperature range (°C)	-40 to +125						
Tolerance at rated capacitance (%)	±20 (20°C, 120Hz)						
Leakage current (μA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (μF) ; V : Rated voltage (V) (20°C)						
Tangent of loss angle (tanδ)	Rated voltage (V)	10	16	25	35	50	
	tanδ (max.)	0.30	0.23	0.18	0.16	0.16	
Characteristics at high and low temperature	Rated voltage (V)	10	16	25	35	50	
		Impedance ratio (max.)	Z-25°C/Z+20°C	3	2	2	2
	Z-40°C/Z+20°C	4	3	3	3	3	
Endurance (125°C) (Applied ripple current)	Test time	3000 hours (φ6.3 : 2000 hours)					
	Leakage current	The initial specified value or less					
	Percentage of capacitance change	Within ±30% of initial value					
	Tangent of the loss angle	300% or less of the initial specified value					
Shelf life (125°C)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1						
Applicable standards	JIS C5101 - 1,- 18 (IEC 60384 - 1,- 18)						

### Outline Drawing

Unit : mm

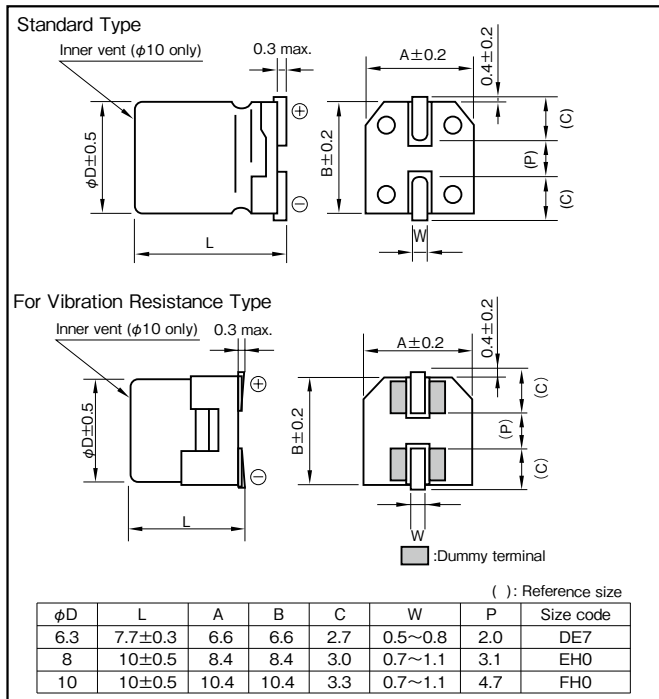

Refer to individual page.  
(Soldering conditions, Land pattern size, The taping specifications)

### Coefficient of Frequency for Rated Ripple Current

Frequency (Hz)	120	1k	10k	100k
Rated voltage (V)				
10 to 50	0.77	0.88	0.96	1

### Product code system (\*For general product)

Standard Type (example : 35V220μF)

RS*	VZJ	221	M	1G	FH0		U
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Taping and packing code	Additional code

For Vibration Resistance Type (example : 35V220μF)

RS*	VMJ	221	M	1G	FH0		U
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Taping and packing code	Additional code

For details, refer to the various "Product Code System" pages.



## Standard Ratings

Rated voltage (V)	Item	10 (1L)					16 (1E)					25 (1T)							
		Case $\phi D \times L$ (mm)	Initial ESR ( $\Omega$ max.)		After endurance test ESR ( $\Omega$ max.)		Rated ripple current (mA rms)	Case $\phi D \times L$ (mm)	Initial ESR ( $\Omega$ max.)		After endurance test ESR ( $\Omega$ max.)		Rated ripple current (mA rms)	Case $\phi D \times L$ (mm)	Initial ESR ( $\Omega$ max.)		After endurance test ESR ( $\Omega$ max.)		Rated ripple current (mA rms)
			20°C	-40°C	20°C	-40°C			20°C	-40°C	20°C	-40°C			20°C	-40°C	20°C	-40°C	
100	—	—	—	—	—	—	6.3×7.7	0.45	5.0	3.5	40	220	8×10	0.15	3.0	0.60	4.5	350	
	—	—	—	—	—	—	8×10	0.15	3.0	0.60	4.5	350		—	—	—	—	—	—
220	8×10	0.15	3.0	0.60	4.5	350	8×10	0.15	3.0	0.60	4.5	350	10×10	0.12	2.0	0.40	3.5	550	
330	8×10	0.15	3.0	0.60	4.5	350	10×10	0.12	2.0	0.40	3.5	550	10×10	0.12	2.0	0.40	3.5	550	
	10×10	0.12	2.0	0.40	3.5	550													
470	10×10	0.12	2.0	0.40	3.5	550	10×10	0.12	2.0	0.40	3.5	550	—	—	—	—	—	—	

Rated voltage (V)	Item	35 (1G)					50 (1U)						
		Case $\phi D \times L$ (mm)	Initial ESR ( $\Omega$ max.)		After endurance test ESR ( $\Omega$ max.)		Rated ripple current (mA rms)	Case $\phi D \times L$ (mm)	Initial ESR ( $\Omega$ max.)		After endurance test ESR ( $\Omega$ max.)		Rated ripple current (mA rms)
			20°C	-40°C	20°C	-40°C			20°C	-40°C	20°C	-40°C	
22	—	—	—	—	—	—	6.3×7.7	0.50	5.0	—	40	197	
33	—	—	—	—	—	—	6.3×7.7	0.50	5.0	—	40	197	
							8×10	0.25	3.5	—	6	270	
47	6.3×7.7	0.45	5.0	3.5	40	220	6.3×7.7	0.50	5.0	—	40	197	
	8×10	0.15	3.0	0.60	4.5	350	8×10	0.25	3.5	—	6	270	
100	8×10	0.15	3.0	0.60	4.5	350	10×10	0.20	2.5	—	4.5	500	
220	10×10	0.12	2.0	0.40	3.5	550	—	—	—	—	—	—	

(Note) After endurance test : 2000 hours  
 Rated ripple current : 125°C , 100kHz, ESR : 100kHz


## Chip Type, 125°C Use, High CV, Long Life Capacitors

GREEN CAP SMD Low ESR 125°C 4000hours Anti-cleaning solvent

- Compatible with surface mounting.
- Supplied with carrier taping.
- Guaranteed 4000 hours at 125°C.  
 (1000 hours :  $\phi 6.3 \times 5.8L-50V$ )  
 (2000 hours :  $\phi 6.3 \times 5.8L-35V$  or less,  $\phi 6.3 \times 7.7L$ )



Marking color : Black print




### Specifications

Item	Performance
Category temperature range (°C)	-40 to +125
Tolerance at rated capacitance (%)	±20 (20°C, 120Hz)
Leakage current (µA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (µF) ; V : Rated voltage (V) (20°C)
Tangent of loss angle (tanδ)	Rated voltage (V)
	tanδ (max.)
Characteristics at high and low temperature	Rated voltage (V)
	Impedance ratio (max.)
Endurance (125°C) (Applied ripple current)	Test time
	Leakage current
	Percentage of capacitance change
	Tangent of the loss angle
Shelf life (125°C)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101 - 1,- 18 (IEC 60384 - 1,- 18)

### Outline Drawing

Unit : mm

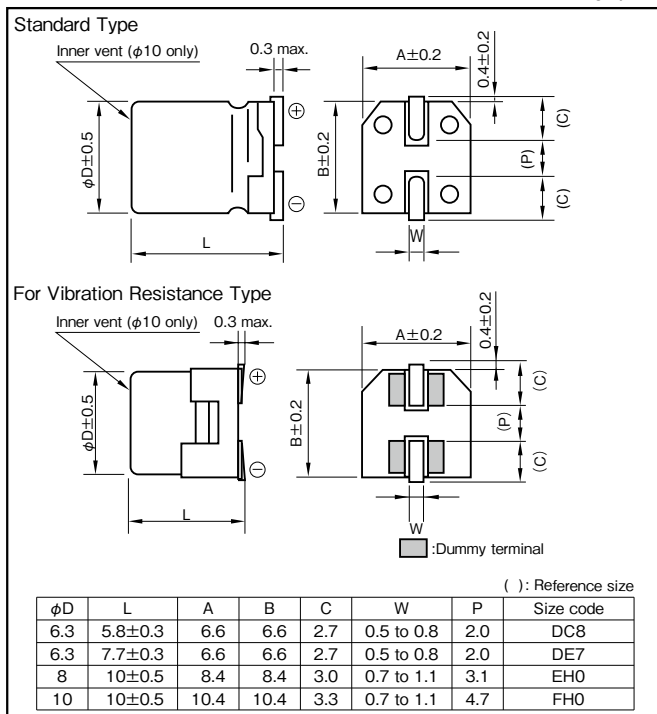

Refer to individual page.  
 (Soldering conditions, Land pattern size, The taping specifications)

### Coefficient of Frequency for Rated Ripple Current

Frequency (Hz)	120	1k	10k	100k
Rated voltage(V)				
10 to 50	0.77	0.88	0.96	1

### Product code system (\*For general product)

Standard Type (example : 35V100µF)

RS*	VZF	101	M	1G	DE7		U
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Taping and packing code	Additional code

For Vibration Resistance Type (example : 25V330µF)

RS*	VMF	331	M	1T	FH0		U
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Taping and packing code	Additional code

For details, refer to the various "Product Code System" pages.

NOTE : Design, Specifications are subject to change without notice.  
 It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

### Standard Ratings

Rated voltage (V) Item Rated capacitance (μF)	10 (1L)				16 (1E)				25 (1T)			
	Case φD × L (mm)	ESR (Ω max.)		Rated ripple current (mA <sub>rms</sub> )	Case φD × L (mm)	ESR (Ω max.)		Rated ripple current (mA <sub>rms</sub> )	Case φD × L (mm)	ESR (Ω max.)		Rated ripple current (mA <sub>rms</sub> )
		20°C	-40°C			20°C	-40°C			20°C	-40°C	
47	—	—	—	—	6.3 × 5.8	1.2	22	110	6.3 × 5.8	1.2	22	110
100	6.3 × 5.8	1.2	22	110	6.3 × 5.8	1.2	22	110	6.3 × 7.7	0.60	12	220
220	6.3 × 7.7	0.60	12	220	6.3 × 7.7	0.60	12	220	8 × 10	0.30	5.5	296
330	8 × 10	0.30	5.5	296	8 × 10	0.30	5.5	296	10 × 10	0.20	3.6	440
470	8 × 10	0.30	5.5	296	10 × 10	0.20	3.6	440	—	—	—	—
680	10 × 10	0.20	3.6	440	10 × 10	0.20	3.6	440	—	—	—	—


Rated voltage (V) Item Rated capacitance (μF)	35 (1G)				50 (1U)			
	Case φD × L (mm)	ESR (Ω max.)		Rated ripple current (mA <sub>rms</sub> )	Case φD × L (mm)	ESR (Ω max.)		Rated ripple current (mA <sub>rms</sub> )
		20°C	-40°C			20°C	-40°C	
22	—	—	—	—	6.3 × 5.8	3.2	48	58
33	—	—	—	—	6.3 × 5.8	3.2	48	58
47	6.3 × 5.8	1.2	22	110	6.3 × 7.7	1.2	18	95
100	6.3 × 7.7	0.60	12	220	8 × 10	0.50	7.5	180
220	8 × 10	0.30	5.5	296	10 × 10	0.30	4.5	280
330	10 × 10	0.20	3.6	440	—	—	—	—

(Note) Rated ripple current : 125°C, 100kHz  
ESR : 100kHz

## Chip Type, 125°C Use, High CV, Long Life Capacitors

GREEN CAP SMD Low ESR 125°C 2000hours Anti-cleaning solvent

- Compatible with surface mounting.
- Supplied with carrier taping.
- Guaranteed 2000 hours at 125°C.



Marking color : Black print

### Specifications

Item	Performance
Category temperature range (°C)	-40 to +125
Tolerance at rated capacitance (%)	±20 (20°C, 120Hz)
Leakage current (µA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (µF) ; V : Rated voltage (V) (20°C)
Tangent of loss angle (tanδ)	Rated voltage (V) 35
	tanδ (max.) 0.14 (20°C, 120Hz)
Characteristics at high and low temperature	Rated voltage (V) 35
	Impedance Ratio (max.) Z-25°C/Z+20°C 2
	Z-40°C/Z+20°C 3 (120Hz)
Endurance (125°C) (Applied ripple current)	Test time 2000 hours
	Leakage current The initial specified value or less
	Percentage of capacitance change Within ±30% of initial value
	Tangent of the loss angle 300% or less of the initial specified value
Shelf life (125°C)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101 - 1, - 18 (IEC 60384 - 1, - 18)

### Coefficient of Frequency for Rated Ripple Current

Frequency (Hz)	120	1k	10k	100k
Rated voltage(V)				
35	0.77	0.88	0.96	1

Refer to individual page.  
(Soldering conditions, Land pattern size, The taping specifications)

### Product code system (\*For general product)

Standard Type (example : 35V47µF)

RS*	VZE	470	M	1G	DE7		U
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Taping and packing code	Additional code

For Vibration Resistance Type (example : 35V47µF)

RS*	VME	470	M	1G	DE7		U
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Taping and packing code	Additional code

For details, refer to the various "Product Code System" pages.

### Outline Drawing

**Standard Type**

**For Vibration Resistance Type**

Unit : mm

φD	L	A	B	C	W	P	Size code
6.3	7.7±0.3	6.6	6.6	2.7	0.5 to 0.8	2.0	DE7

( ) : Reference size

### Standard Ratings

Rated voltage (V)	Item	35 (1G)			Rated ripple current (mArms)	
		Case φD × L (mm)	ESR (Ω max.)			
			20°C	-40°C		After Endurance -40°C
47		6.3 × 7.7	0.30	3	6	240
100		6.3 × 7.7	0.30	3	6	240


(Note) Rated ripple current : 125°C, 100kHz  
ESR : 100kHz

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

## Chip Type, 135°C Capacitors

GREEN CAP   SMD   135°C 1000hours   Anti-cleaning solvent

- Compatible with surface mounting.
- Supplied with carrier taping.
- Guarantees 1000 hours 135°C.



Marking color : Black print

### Specifications

Item	Performance		
Category temperature range (°C)	-40 to +135		
Tolerance at rated capacitance (%)	±20 (20°C, 120Hz)		
Leakage current (µA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (µF) ; V : Rated voltage (V) (20°C)		
Tangent of loss angle (tanδ)	Rated voltage (V)	25	35
	tanδ (max.)	0.24	0.20
Characteristics at high and low temperature	Rated voltage (V)	25	35
	Impedance Ratio (max.)	Z-25°C/Z+20°C Z-40°C/Z+20°C	2 3
Endurance (135°C) (Applied ripple current)	Test time	1000 hours	
	Leakage current	The initial specified value or less	
	Percentage of Capacitance change	Within ±30% of initial value	
	Tangent of loss angle	300% or less of the initial specified value	
Shelf life (135°C)	Test time : 500hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1		
Applicable standards	JIS C5101 - 1, - 18 (IEC 60384 - 1, - 18)		

### Coefficient of Frequency for Rated Ripple Current

Rated voltage(V) \ Frequency (Hz)	120	1k	10k	100k
25 to 35	0.77	0.88	0.96	1

Refer to individual page.  
(Soldering conditions, Land pattern size, The taping specifications)

### Product code system : 25V330µF (\*For general product)

Standard Type							
RS*	VVX	331	M	1T	FH0	□	U
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Taping and packing code	Additional code
For Vibration Resistance Type							
RS*	VTX	331	M	1T	FH0	□	U
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Taping and packing code	Additional code

For details, refer to the various "Product Code System" pages.

### Outline Drawing

Unit : mm

φD	L	A	B	C	W	P	Size code
8	10±0.5	8.4	8.4	3.0	0.7 to 1.1	3.1	EH0
10	10±0.5	10.4	10.4	3.3	0.7 to 1.1	4.7	FH0

( ) : Reference size

□ : Dummy terminal

### Standard Ratings

Rated voltage (V) \ Rated capacitance (µF)	25 (1T)				35 (1G)			
	Case φD × L (mm)	Size code	ESR (Ω max.)	Rated ripple current (mArms)	Case φD × L (mm)	Size code	ESR (Ω max.)	Rated ripple current (mArms)
22	—	—	—	—	8 × 10	EH0	0.70	115
33	8 × 10	EH0	0.70	115	8 × 10	EH0	0.70	115
	10 × 10	FH0	0.50	155	10 × 10	FH0	0.50	155
47	8 × 10	EH0	0.70	115	8 × 10	EH0	0.70	115
	10 × 10	FH0	0.50	155	10 × 10	FH0	0.50	155
100	8 × 10	EH0	0.70	115	8 × 10	EH0	0.70	115
	10 × 10	FH0	0.50	155	10 × 10	FH0	0.50	155
220	8 × 10	EH0	0.70	115	10 × 10	FH0	0.50	155
	10 × 10	FH0	0.50	155				
330	10 × 10	FH0	0.50	155	—	—	—	—

(Note) Rated ripple current : 135°C, 100kHz  
ESR : 20°C, 100kHz

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Chip type 105°C Capacitors(height:4.5mm)


GREEN CAP

SMD

105°C  
1000hours

Anti-cleaning solvent

- Compatible with surface mounting for 4.5mm height capacitors.
- Supplied with carrier taping.
- Guarantees 1000 hours 105°C.




Marking color : Black print

Specifications

Item	Performance																				
Category temperature range (°C)	-40 to +105																				
Tolerance at rated capacitance (%)	±20 (20°C,120Hz)																				
Leakage current (µA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (µF), V : Rated voltage (V) (20°C)																				
Tangent of loss angle (tanδ)	<table border="1"> <thead> <tr> <th>Rated voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> </tr> </thead> <tbody> <tr> <td>tanδ (max.)</td> <td>0.38</td> <td>0.32</td> <td>0.20</td> <td>0.16</td> <td>0.14</td> <td>0.14</td> </tr> </tbody> </table> <p>(20°C,120Hz)</p>	Rated voltage (V)	6.3	10	16	25	35	50	tanδ (max.)	0.38	0.32	0.20	0.16	0.14	0.14						
Rated voltage (V)	6.3	10	16	25	35	50															
tanδ (max.)	0.38	0.32	0.20	0.16	0.14	0.14															
Characteristics at high and low temperature	<table border="1"> <thead> <tr> <th>Rated voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> </tr> </thead> <tbody> <tr> <td rowspan="2">Impedance ratio (max.)</td> <td>Z-25°C/Z+20°C</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z-40°C/Z+20°C</td> <td>10</td> <td>8</td> <td>6</td> <td>4</td> <td>3</td> </tr> </tbody> </table> <p>(120Hz)</p>	Rated voltage (V)	6.3	10	16	25	35	50	Impedance ratio (max.)	Z-25°C/Z+20°C	4	3	2	2	2	Z-40°C/Z+20°C	10	8	6	4	3
Rated voltage (V)	6.3	10	16	25	35	50															
Impedance ratio (max.)	Z-25°C/Z+20°C	4	3	2	2	2															
	Z-40°C/Z+20°C	10	8	6	4	3															
Endurance (105°C) (Applied ripple current)	<table border="1"> <thead> <tr> <th>Test time</th> <td>1000 hours</td> </tr> </thead> <tbody> <tr> <td>Leakage current</td> <td>The initial specified value or less</td> </tr> <tr> <td>Percentage of capacitance change</td> <td>Within ±20% of initial value (16WV or less:±25%)</td> </tr> <tr> <td>Tangent of loss angle</td> <td>300% or less of the initial specified value</td> </tr> </tbody> </table>	Test time	1000 hours	Leakage current	The initial specified value or less	Percentage of capacitance change	Within ±20% of initial value (16WV or less:±25%)	Tangent of loss angle	300% or less of the initial specified value												
Test time	1000 hours																				
Leakage current	The initial specified value or less																				
Percentage of capacitance change	Within ±20% of initial value (16WV or less:±25%)																				
Tangent of loss angle	300% or less of the initial specified value																				
Shelf life (105°C)	Test time : 500hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1																				
Applicable standards	JIS C5101 - 1,- 18 (IEC 60384 - 1,- 18)																				

Outline Drawing

Unit : mm

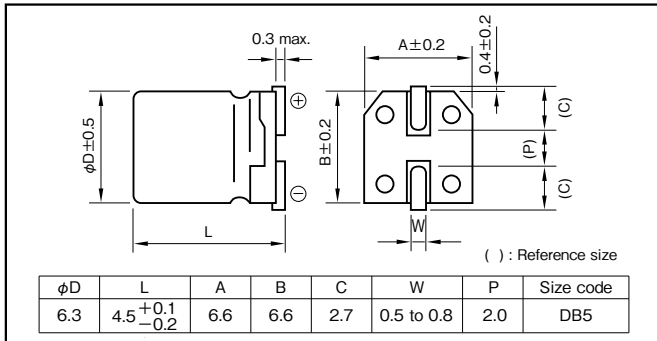

Refer to individual page.  
(Soldering conditions, Land pattern size, The taping specifications)

Coefficient of Frequency for Rated Ripple Current

Frequency (Hz)	50 · 60	120	1k	10k · 100k
Rated voltage (V)				
6.3 to 16	0.80	1	1.15	1.25
25 to 35	0.80	1	1.25	1.40
50	0.70	1	1.35	1.50

Product code system : 6.3V100µF (\*For general product)

RS*	VVE	101	M	1J	DB5		U
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Taping and packing code	Additional code

For details, refer to the various "Product Code System" pages.

Standard Ratings

6.3V (1J)		10V (1L)		16V (1E)		25V (1T)		35V (1G)		50V (1U)	
Rated capacitance (µF)	Rated ripple current (mArms)	Rated capacitance (µF)	Rated ripple current (mArms)	Rated capacitance (µF)	Rated ripple current (mArms)	Rated capacitance (µF)	Rated ripple current (mArms)	Rated capacitance (µF)	Rated ripple current (mArms)	Rated capacitance (µF)	Rated ripple current (mArms)
100	52	47	40	33	35	22	33	22	36	10	26
				47	44	33	42				

(Note) Rated ripple current : 105°C , 120Hz

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Chip Type 105°C Use, Long Life Bipolar Capacitors

GREEN CAP

SMD


105°C 2000hours

Anti-cleaning solvent

- Compatible with surface mounting.
- Supplied with carrier taping.
- Guarantees 2000 hours 105°C.



Marking color : Black print




Specifications

Item	Performance							
Category temperature range (°C)	-40 to +105							
Tolerance at rated capacitance (%)	±20 (20°C, 120Hz)							
Leakage current (µA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (µF) , V : Rated voltage (V) (20°C)							
Tangent of loss angle (tanδ)	Rated voltage (V)	6.3	10	16	25	35	50	
	tanδ (max.)	0.30	0.22	0.16	0.14	0.12	0.12	
Characteristics at high and low temperature	Rated voltage (V)	6.3	10	16	25	35	50	
	Impedance ratio (max.)	Z-25°C/Z+20°C	4	3	2	2	2	2
		Z-40°C/Z+20°C	8	6	4	4	3	3
Endurance (105°C) (Applied ripple current)	Test time	2000 hours (with the polarity inverted every 250 hours)						
	Leakage current	The initial specified value or less						
	Percentage of capacitance change	Within ±20% of initial value						
	Tangent of loss angle	200% or less of the initial specified value						
Shelf life (105°C)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1							
Applicable standards	JIS C5101 - 1, - 18 (IEC 60384 - 1, - 18)							

Outline Drawing

Unit : mm

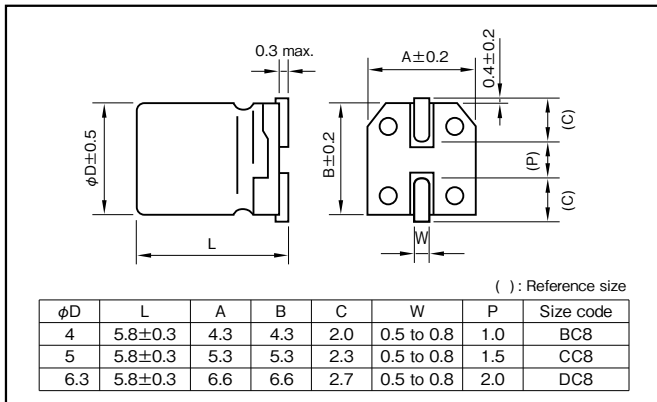

Refer to individual page.  
(Soldering conditions, Land pattern size, The taping specifications)

Coefficient of Frequency for Rated Ripple Current

Rated voltage (V)	Frequency (Hz)			
	50 · 60	120	1k	10k · 100k
6.3 to 16	0.80	1	1.15	1.25
25 to 35	0.80	1	1.25	1.40
50	1 to 3.3µF	0.50	1	1.35
	4.7µF	0.70	1	1.35

Product code system : 6.3V47µF (\*For general product)

RS*	VV9	470	M	1J	DC8		U
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Taping and packing code	Additional code

For details, refer to the various "Product Code System" pages.

Standard Ratings

Rated voltage (V)	Item	6.3 (1J)		10 (1L)		16 (1E)		25 (1T)		35 (1G)		50 (1U)	
		Case φD×L (mm)	Rated ripple current (mA Arms)	Case φD×L (mm)	Rated ripple current (mA Arms)	Case φD×L (mm)	Rated ripple current (mA Arms)	Case φD×L (mm)	Rated ripple current (mA Arms)	Case φD×L (mm)	Rated ripple current (mA Arms)	Case φD×L (mm)	Rated ripple current (mA Arms)
1		—	—	—	—	—	—	—	—	—	—	4×5.8	10
2.2		—	—	—	—	—	—	—	—	4×5.8	10	—	—
3.3		—	—	—	—	—	—	4×5.8	12	—	—	5×5.8	17
4.7		—	—	—	—	—	—	4×5.8	12	—	—	6.3×5.8	20
10		—	—	4×5.8	20	5×5.8	25	6.3×5.8	28	—	—	—	—
22		—	—	—	—	—	—	6.3×5.8	55	—	—	—	—
33		—	—	6.3×5.8	41	—	—	—	—	—	—	—	—
47		6.3×5.8	45	—	—	—	—	—	—	—	—	—	—

(Note) Rated ripple current : 105°C, 120Hz

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

**For Vibration Resistance,  
Chip Type Aluminum Electrolytic Capacitors**



**Chip Type 105°C Use, Low ESR, For Vibration Capacitors**

GREEN CAP

SMD


Vibration Resistance

Low ESR

105°C 5000hours

Anti-cleaning solvent

- Compatible with surface mounting.
- For Vibration resistance. (30G guaranteed)
- Supplied with carrier taping.
- Guaranteed 5000 hours at 105°C.  
 (φ6.3 : 1000 hours, φ8, φ10 : 2000 hours)




Marking color : Black print

**Specifications**

Item	Performance																			
Category temperature range (°C)	-55 to +105																			
Tolerance at rated capacitance (%)	±20 (20°C,120Hz)																			
Leakage current (μA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (μF) , V : Rated voltage (V) (20°C)																			
Tangent of loss angle (tanδ)	<table border="1"> <tr> <th>Rated voltage (V)</th> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> </tr> <tr> <th>tanδ (max.)</th> <td>0.28</td> <td>0.24</td> <td>0.20</td> <td>0.16</td> <td>0.14</td> </tr> </table>	Rated voltage (V)	6.3	10	16	25	35	tanδ (max.)	0.28	0.24	0.20	0.16	0.14							
	Rated voltage (V)	6.3	10	16	25	35														
tanδ (max.)	0.28	0.24	0.20	0.16	0.14															
0.02 is added to every 1000μF increase over 1000μF (20°C,120Hz)																				
Characteristics at high and low temperature	<table border="1"> <tr> <th>Rated voltage (V)</th> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> </tr> <tr> <th rowspan="2">Impedance ratio (max.)</th> <td>Z-25°C/Z+20°C</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z-55°C/Z+20°C</td> <td>8</td> <td>5</td> <td>4</td> <td>3</td> <td>3</td> </tr> </table>	Rated voltage (V)	6.3	10	16	25	35	Impedance ratio (max.)	Z-25°C/Z+20°C	4	3	2	2	2	Z-55°C/Z+20°C	8	5	4	3	3
	Rated voltage (V)	6.3	10	16	25	35														
Impedance ratio (max.)	Z-25°C/Z+20°C	4	3	2	2	2														
	Z-55°C/Z+20°C	8	5	4	3	3														
(120Hz)																				
Endurance (105°C) (Applied ripple current)	Test time	1000 hours (φ6.3) 2000 hours (φ8, φ10) 5000 hours (φ12.5 or more)																		
	Leakage current	The initial specified value or less																		
	Percentage of capacitance change	Within ±25% of initial value																		
	Tangent of loss angle	200% or less of the initial specified value																		
Shelf life (105°C)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1																			
Applicable standards	JIS C5101 - 1, - 18 (IEC 60384 - 1, - 18)																			

**Outline Drawing**

Unit : mm

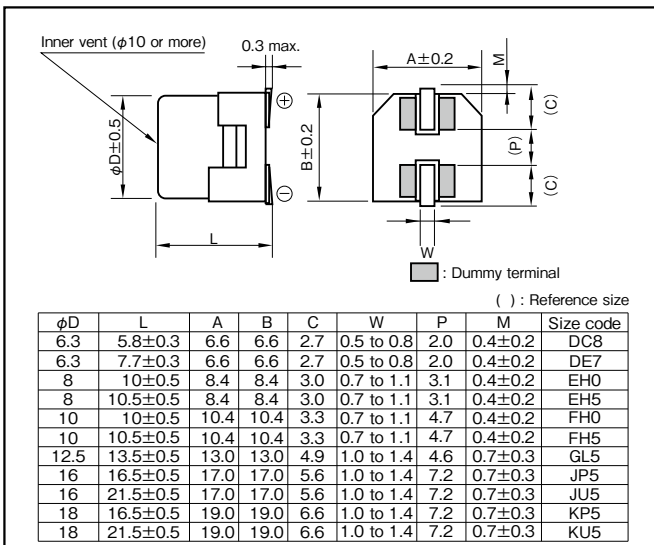

Refer to individual page.  
 (Soldering conditions, Land pattern size, The taping specifications)

**Coefficient of Frequency for Rated Ripple Current**

Frequency (Hz)	120	1k	10k	100k
Rated voltage (V)	120	1k	10k	100k
6.3 to 35	0.50	0.75	0.90	1

**Product code system (\*For general product)**

φ6.3 (example : 6.3V220μF)

RS*	VTZ	221	M	1J	DC8	□	U
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Taping and packing code	Additional code

φ8, φ10 (example : 6.3V1500μF)

RS*	VTZ	152	M	1J	FH5	□	SU
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Taping and packing code	Additional code

φ12.5 or more (example : 6.3V2200μF)

RS*	VTZ	222	M	1J	GL5	005	T
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Taping and packing code	Additional code

- If "Standard (terminal)" type is required, please see the series VVZ.
- For details, refer to the various "Product Code System" pages.

NOTE : Design, Specifications are subject to change without notice.  
 It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

## Standard Ratings


Rated voltage (V)	Item	6.3 (1J)				10 (1L)				16 (1E)				25 (1T)				35 (1G)			
		Case φD × L (mm)	Size code	ESR (Ω max.)	Rated ripple current (mA rms)	Case φD × L (mm)	Size code	ESR (Ω max.)	Rated ripple current (mA rms)	Case φD × L (mm)	Size code	ESR (Ω max.)	Rated ripple current (mA rms)	Case φD × L (mm)	Size code	ESR (Ω max.)	Rated ripple current (mA rms)	Case φD × L (mm)	Size code	ESR (Ω max.)	Rated ripple current (mA rms)
33	—	—	—	—	—	—	—	—	6.3×5.8	DC8	0.44	230	6.3×5.8	DC8	0.44	230	6.3×5.8	DC8	0.44	230	
47	—	—	—	—	6.3×5.8	DC8	0.44	230	6.3×5.8	DC8	0.44	230	6.3×5.8	DC8	0.44	230	6.3×5.8	DC8	0.44	230	
68	6.3×5.8	DC8	0.44	230	6.3×5.8	DC8	0.44	230	6.3×5.8	DC8	0.44	230	6.3×5.8	DC8	0.44	230	6.3×7.7	DE7	0.34	280	
100	6.3×5.8	DC8	0.44	230	6.3×5.8	DC8	0.44	230	6.3×5.8	DC8	0.44	230	6.3×7.7	DE7	0.34	280	8×10	EH0	0.20	450	
150	6.3×5.8	DC8	0.44	230	6.3×5.8	DC8	0.44	230	6.3×7.7	DE7	0.34	280	8×10	EH0	0.20	450	8×10.5	EH5	0.17	450	
220	6.3×5.8	DC8	0.44	230	6.3×7.7	DE7	0.34	280	6.3×7.7	DE7	0.34	280	8×10.5	EH5	0.17	450	8×10.5	EH5	0.17	450	
330	6.3×7.7	DE7	0.34	280	8×10	EH0	0.20	450	8×10	EH0	0.20	450	10×10	FH0	0.10	670	10×10	FH0	0.10	670	
470	8×10	EH0	0.20	450	10×10	FH0	0.10	670	10×10	FH0	0.10	670	10×10	FH0	0.10	670	12.5×13.5	GL5	0.060	1100	
680	8×10.5	EH5	0.17	450	10×10	FH0	0.10	670	10×10.5	FH5	0.090	670	12.5×13.5	GL5	0.060	1100	16×16.5	JP5	0.046	1540	
1000	8×10.5	EH5	0.17	450	10×10.5	FH5	0.090	670	12.5×13.5	GL5	0.060	1100	12.5×13.5	GL5	0.060	1100	16×16.5	JP5	0.046	1540	
1500	10×10.5	FH5	0.090	670	16×16.5	JP5	0.046	1540	16×16.5	JP5	0.046	1540	16×21.5	JU5	0.040	1840	—	—	—	—	
2200	12.5×13.5	GL5	0.060	1100	18×16.5	KP5	0.042	1760	18×16.5	KP5	0.042	1760	18×21.5	KU5	0.038	1960	18×21.5	KU5	0.038	1960	
3300	16×16.5	JP5	0.046	1540	18×16.5	KP5	0.042	1760	18×21.5	KU5	0.038	1960	—	—	—	—	—	—	—	—	
4700	16×21.5	JU5	0.040	1840	18×21.5	KU5	0.038	1960	—	—	—	—	—	—	—	—	—	—	—	—	
6800	18×21.5	KU5	0.038	1960	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
8200	18×21.5	KU5	0.038	1960	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	

(Note) Rated ripple current : 105°C , 100kHz  
ESR : 20°C , 100kHz

**Chip Type 105°C Use, Low ESR, Long Life, For Vibration Capacitors**

GREEN CAP   SMD   Vibration Resistance   Low ESR   105°C 5000hours   Anti-cleaning solvent

- Compatible with surface mounting.
- For Vibration resistance. (30G guaranteed)
- Supplied with carrier taping.
- Guaranteed 2000 hours at 105°C.  
 (6.3V to 50V 10.0L : 5000 hours)  
 (φ12.5 or more : 5000 hours)




Marking color : Black print

**Specifications**

Item	Performance																																						
Category temperature range (°C)	-55 to +105																																						
Tolerance at rated capacitance (%)	±20 (20°C, 120Hz)																																						
Leakage current (μA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (μF) , V : Rated voltage (V) (20°C)																																						
Tangent of loss angle (tanδ)	<table border="1"> <thead> <tr> <th>Rated voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>80</th> <th>100</th> </tr> </thead> <tbody> <tr> <td>tanδ (max.)</td> <td>0.26</td> <td>0.19</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.1</td> <td>0.08</td> <td>0.08</td> <td>0.07</td> </tr> </tbody> </table>	Rated voltage (V)	6.3	10	16	25	35	50	63	80	100	tanδ (max.)	0.26	0.19	0.16	0.14	0.12	0.1	0.08	0.08	0.07																		
	Rated voltage (V)	6.3	10	16	25	35	50	63	80	100																													
tanδ (max.)	0.26	0.19	0.16	0.14	0.12	0.1	0.08	0.08	0.07																														
0.02 is added to every 1000μF increase over 1000μF (20°C, 120Hz)																																							
Characteristics at high and low temperature	<table border="1"> <thead> <tr> <th>Rated voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>80</th> <th>100</th> </tr> </thead> <tbody> <tr> <td rowspan="3">Impedance ratio (max.)</td> <td>Z-25°C/Z+20°C</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z-40°C/Z+20°C</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> </tr> <tr> <td>Z-55°C/Z+20°C</td> <td>8</td> <td>4</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> </tr> </tbody> </table>	Rated voltage (V)	6.3	10	16	25	35	50	63	80	100	Impedance ratio (max.)	Z-25°C/Z+20°C	2	2	2	2	2	2	2	2	Z-40°C/Z+20°C	3	3	3	3	3	3	3	3	Z-55°C/Z+20°C	8	4	4	3	3	3	3	3
	Rated voltage (V)	6.3	10	16	25	35	50	63	80	100																													
	Impedance ratio (max.)	Z-25°C/Z+20°C	2	2	2	2	2	2	2	2																													
Z-40°C/Z+20°C		3	3	3	3	3	3	3	3																														
Z-55°C/Z+20°C		8	4	4	3	3	3	3	3																														
(120Hz)																																							
Endurance (105°C) (Applied ripple current)	Test time	2000 hours (φ 12.5 or more, 6.3V to 50V 10.0L : 5000 hours)																																					
	Leakage current	The initial specified value or less																																					
	Percentage of capacitance change	Within ±30% of initial value																																					
	Tangent of loss angle	200% or less of the initial specified value (φ 12.5 or more, 6.3V to 50V 10.0L : 300%)																																					
Shelf life (105°C)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1																																						
Applicable standards	JIS C5101-1, -18 (IEC 60384-1, -18)																																						

**Outline Drawing**

Unit : mm

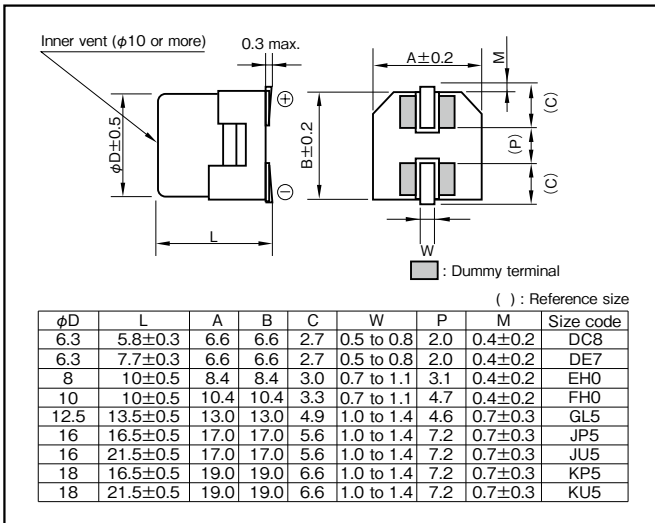

Refer to individual page.  
 (Soldering conditions, Land pattern size, The taping specifications)

**Coefficient of Frequency for Rated Ripple Current**

Frequency (Hz)	50 · 60	120	1k	10k · 100k
Rated voltage (V)	50 · 60	120	1k	10k · 100k
6.3 to 100	0.50	0.50	0.75	1

**Product code system (\*For general product)**

φ6.3 (example : 6.3V220μF)

RS*	VTD	221	M	1J	DC8	□	U
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Taping and packing code	Additional code

φ8, φ10 (example : 6.3V1500μF)

RS*	VTD	152	M	1J	FH0	□	SU
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Taping and packing code	Additional code

φ12.5 or more (example : 6.3V2200μF)

RS*	VTD	222	M	1J	GL5	005	T
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Taping and packing code	Additional code

- If "Standard (terminal)" type is required, please see the series VVD.
- For details, refer to the various "Product Code System" pages.

NOTE : Design, Specifications are subject to change without notice.  
 It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

## Standard Ratings

Rated voltage (V)	Item	6.3 (1J)				10 (1L)				16 (1E)				25 (1T)				35 (1G)			
		Case	Size code	ESR (Ω max.)	Rated ripple current (mA rms)	Case	Size code	ESR (Ω max.)	Rated ripple current (mA rms)	Case	Size code	ESR (Ω max.)	Rated ripple current (mA rms)	Case	Size code	ESR (Ω max.)	Rated ripple current (mA rms)	Case	Size code	ESR (Ω max.)	Rated ripple current (mA rms)
33		—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
47		—	—	—	—	—	—	—	—	6.3×5.8	DC8	0.36	250	6.3×5.8	DC8	0.36	250	6.3×5.8	DC8	0.36	250
100		—	—	—	—	—	—	—	—	6.3×5.8	DC8	0.36	250	6.3×7.7	DE7	0.30	300	6.3×7.7	DE7	0.30	300
220		6.3×5.8	DC8	0.36	250	6.3×7.7	DE7	0.30	300	6.3×7.7	DE7	0.30	300	8×10	EH0	0.16	600	8×10	EH0	0.16	600
330		6.3×7.7	DE7	0.30	300	8×10	EH0	0.16	600	8×10	EH0	0.16	600	8×10	EH0	0.16	600	10×10	FH0	0.090	850
470		8×10	EH0	0.16	600	8×10	EH0	0.16	600	8×10	EH0	0.16	600	10×10	FH0	0.090	850	12.5×13.5	GL5	0.054	1160
680		8×10	EH0	0.16	600	10×10	FH0	0.090	850	10×10	FH0	0.090	850	12.5×13.5	GL5	0.054	1160	12.5×13.5	GL5	0.054	1160
1000		8×10	EH0	0.16	600	10×10	FH0	0.090	850	12.5×13.5	GL5	0.054	1160	12.5×13.5	GL5	0.054	1160	16×16.5	JP5	0.044	1620
1500		10×10	FH0	0.090	850	12.5×13.5	GL5	0.054	1160	12.5×13.5	GL5	0.054	1160	16×16.5	JP5	0.044	1620	18×16.5	KP5	0.040	1840
2200		12.5×13.5	GL5	0.054	1160	12.5×13.5	GL5	0.054	1160	16×16.5	JP5	0.044	1620	16×21.5	JU5	0.038	1920	18×21.5	KU5	0.036	2080
3300		16×16.5	JP5	0.044	1620	16×16.5	JP5	0.044	1620	16×16.5	JP5	0.040	1840	18×16.5	KP5	0.040	1840	18×16.5	KP5	0.040	1840
4700		18×16.5	KP5	0.040	1840	18×21.5	KU5	0.036	2080	16×21.5	JU5	0.038	1920	18×21.5	KU5	0.036	2080	—	—	—	—
6800		18×16.5	KP5	0.040	1840	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
8200		18×21.5	KU5	0.036	2080	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Rated voltage (V)	Item	50 (1U)				63 (4E)				80 (1R)				100 (1H)			
		Case	Size code	ESR (Ω max.)	Rated ripple current (mA rms)	Case	Size code	ESR (Ω max.)	Rated ripple current (mA rms)	Case	Size code	ESR (Ω max.)	Rated ripple current (mA rms)	Case	Size code	ESR (Ω max.)	Rated ripple current (mA rms)
10		6.3×5.8	DC8	0.86	170	—	—	—	—	—	—	—	—	—	—	—	—
22		6.3×5.8	DC8	0.86	170	—	—	—	—	8×10	EH0	0.90	130	8×10	EH0	1.30	130
33		6.3×7.7	DE7	0.66	195	8×10	EH0	0.65	250	8×10	EH0	0.90	130	10×10	FH0	0.70	200
47		6.3×7.7	DE7	0.66	195	8×10	EH0	0.65	250	10×10	FH0	0.50	200	—	—	—	—
68		—	—	—	—	8×10	EH0	0.65	250	—	—	—	—	—	—	—	—
100		8×10	EH0	0.32	350	10×10	FH0	0.35	400	12.5×13.5	GL5	0.18	550	16×16.5	JP5	0.17	700
220		10×10	FH0	0.18	700	12.5×13.5	GL5	0.16	600	16×16.5	JP5	0.16	720	18×16.5	KP5	0.15	800
330		12.5×13.5	GL5	0.12	900	16×16.5	JP5	0.14	800	18×16.5	KP5	0.13	830	18×21.5	KU5	0.13	940
470		16×16.5	JP5	0.080	1000	18×16.5	KP5	0.12	900	18×21.5	KU5	0.11	1000	—	—	—	—
680		16×16.5	JP5	0.080	1000	18×21.5	KU5	0.10	1050	—	—	—	—	—	—	—	—
1000		18×16.5	KP5	0.076	1100	—	—	—	—	—	—	—	—	—	—	—	—

(Note) Rated ripple current : 105°C , 100kHz  
ESR : 20°C , 100kHz

**Chip Type 125°C Use, Low ESR, For Vibration Capacitors**

GREEN CAP

SMD


Vibration Resistance

Low ESR

125°C 5000hours

Anti-cleaning solvent

- Compatible with surface mounting.
- For Vibration resistance. (30G guaranteed)
- Supplied with carrier taping.
- Guaranteed 1000 to 5000 hours at 125°C.  
 (See table below)




Marking color : Black print

**Specifications**

Item	Performance																										
Category temperature range (°C)	-40 to +125																										
Tolerance at rated capacitance (%)	±20 (20°C,120Hz)																										
Leakage current (µA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (µF) , V : Rated voltage (V) (20°C)																										
Tangent of loss angle (tanδ)	<table border="1"> <thead> <tr> <th>Rated voltage (V)</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>80</th> <th>100</th> </tr> </thead> <tbody> <tr> <td>Tangent of loss angle</td> <td>0.24</td> <td>0.20</td> <td>0.16</td> <td>0.14</td> <td>0.14</td> <td>0.12</td> <td>0.12</td> <td>0.10</td> </tr> </tbody> </table>	Rated voltage (V)	10	16	25	35	50	63	80	100	Tangent of loss angle	0.24	0.20	0.16	0.14	0.14	0.12	0.12	0.10								
	Rated voltage (V)	10	16	25	35	50	63	80	100																		
Tangent of loss angle	0.24	0.20	0.16	0.14	0.14	0.12	0.12	0.10																			
0.02 is added to every 1000µF increase over 1000µF (20°C,120Hz)																											
Characteristics at high and low temperature	<table border="1"> <thead> <tr> <th>Rated voltage (V)</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>80</th> <th>100</th> </tr> </thead> <tbody> <tr> <td rowspan="2">Impedance ratio (max.)</td> <td>Z-25°C/Z+20°C</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z-40°C/Z+20°C</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> </tr> </tbody> </table>	Rated voltage (V)	10	16	25	35	50	63	80	100	Impedance ratio (max.)	Z-25°C/Z+20°C	3	2	2	2	2	2	2	Z-40°C/Z+20°C	4	3	3	3	3	3	3
	Rated voltage (V)	10	16	25	35	50	63	80	100																		
Impedance ratio (max.)	Z-25°C/Z+20°C	3	2	2	2	2	2	2																			
	Z-40°C/Z+20°C	4	3	3	3	3	3	3																			
(120Hz)																											
Endurance (125°C) (Applied ripple current)	Test time																										
	Leakage current																										
	Percentage of capacitance change																										
	Tangent of loss angle																										
Shelf life (125°C)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1																										
Applicable standards	JIS C5101 - 1, - 18 (IEC 60384 - 1, - 18)																										

**Outline Drawing**

Unit : mm

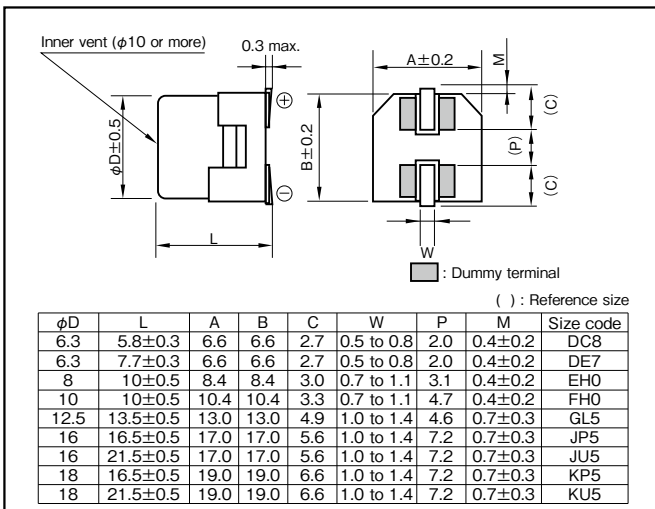

Refer to individual page.  
 (Soldering conditions, Land pattern size, The taping specifications)

**Coefficient of Frequency for Rated Ripple Current**

Frequency (Hz)	120	1k	10k	100k
Rated voltage (V)				
10 to 100	0.77	0.88	0.96	1

**Product code system (\*For general product)**

φ6.3 (example : 10V220µF)

RS*	VTT	221	M	1L	DE7		U
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Taping and packing code	Additional code

φ8, φ10 (example : 35V100µF)

RS*	VTT	101	M	1G	FH0		SU
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Taping and packing code	Additional code

50V or less : φ12.5 or more (example : 35V1000µF)

RS*	VTT	102	M	1G	KU5	005	T
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Taping and packing code	Additional code

63V to 100V : φ12.5 or more (example : 63V220µF)

RS*	VTT	221	M	4E	JP5	005	KT
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Taping and packing code	Additional code

- If "Standard (terminal)" type is required, please see the series VVT.
- For details, refer to the various "Product Code System" pages.

Standard Ratings

Rated voltage (V)	Item	10 (1L)				16 (1E)				25 (1T)				35 (1G)				50 (1U)			
		Case	ESR (Ω max.)		Rated ripple current (mA <sub>rms</sub> )	Case	ESR (Ω max.)		Rated ripple current (mA <sub>rms</sub> )	Case	ESR (Ω max.)		Rated ripple current (mA <sub>rms</sub> )	Case	ESR (Ω max.)		Rated ripple current (mA <sub>rms</sub> )	Case	ESR (Ω max.)		Rated ripple current (mA <sub>rms</sub> )
			φD × L (mm)	20°C			-40°C	φD × L (mm)			20°C	-40°C			φD × L (mm)	20°C			-40°C	φD × L (mm)	
10		-	-	-	-	-	-	-	-	-	-	-	6.3×5.8	1.0	15	114	6.3×5.8	3.2	48	58	
22		-	-	-	-	-	-	-	6.3×5.8	1.0	15	114	6.3×5.8	1.0	15	114	6.3×7.7	1.2	18	95	
33		-	-	-	6.3×5.8	1.0	15	114	6.3×5.8	1.0	15	114	6.3×7.7	0.60	9.0	165	6.3×7.7	1.2	18	95	
47		-	-	-	6.3×5.8	1.0	15	114	6.3×7.7	0.60	9.0	165	6.3×7.7	0.60	9.0	165	8×10	0.50	7.5	180	
100		-	-	-	-	-	-	-	6.3×7.7	0.60	9.0	165	8×10	0.20	2.0	340	8×10	0.50	7.5	180	
		-	-	-	-	-	-	-	8×10	0.20	2.0	340	10×10	0.20	2.0	340	10×10	0.30	4.5	280	
220	6.3×7.7	0.60	9.0	165	8×10	0.20	2.0	340	8×10	0.20	2.0	340	8×10	0.20	2.0	340	12.5×13.5	0.18	2.7	550	
		-	-	-	10×10	0.15	1.5	500	10×10	0.15	1.5	500	10×10	0.15	1.5	500	10×10	0.15	1.5	500	
330	8×10	0.20	2.0	340	10×10	0.15	1.5	500	10×10	0.15	1.5	500	12.5×13.5	0.086	1.29	750	16×16.5	0.12	1.8	850	
	10×10	0.15	1.5	500	10×10	0.15	1.5	500	12.5×13.5	0.086	1.29	750	16×16.5	0.060	0.90	1000	16×16.5	0.10	1.5	920	
470	10×10	0.15	1.5	500	12.5×13.5	0.086	1.29	750	12.5×13.5	0.086	1.29	750	16×16.5	0.060	0.90	1000	18×16.5	0.10	1.5	920	
		-	-	-	16×16.5	0.060	0.90	1000	16×16.5	0.060	0.90	1000	18×16.5	0.050	0.75	1200	-	-	-	-	
680	12.5×13.5	0.086	1.29	750	12.5×13.5	0.086	1.29	750	16×16.5	0.060	0.90	1000	18×16.5	0.050	0.75	1200	-	-	-	-	
1000	12.5×13.5	0.086	1.29	750	18×16.5	0.050	0.75	1200	18×21.5	0.042	0.63	1550	18×21.5	0.042	0.63	1550	-	-	-	-	
2200	16×16.5	0.060	0.90	1000	18×16.5	0.050	0.75	1200	-	-	-	-	-	-	-	-	-	-	-	-	
3300	18×16.5	0.050	0.75	1200	18×21.5	0.042	0.63	1550	-	-	-	-	-	-	-	-	-	-	-	-	
4700	18×21.5	0.042	0.63	1550	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	

Rated voltage (V)	Item	63 (4E)				80 (1R)				100 (1H)			
		Case	ESR (Ω max.)		Rated ripple current (mA <sub>rms</sub> )	Case	ESR (Ω max.)		Rated ripple current (mA <sub>rms</sub> )	Case	ESR (Ω max.)		Rated ripple current (mA <sub>rms</sub> )
			φD × L (mm)	20°C			-40°C	φD × L (mm)			20°C	-40°C	
10		-	-	-	8×10	0.75	15	110	8×10	0.75	15	110	
22		8×10	0.70	14	140	8×10	0.75	15	110	8×10	0.75	15	110
		-	-	-	10×10	0.55	11	150	10×10	0.55	11	150	
33		8×10	0.70	14	140	8×10	0.75	15	110	10×10	0.55	11	150
		-	-	-	10×10	0.50	10	200	10×10	0.55	11	150	
47		8×10	0.70	14	140	-	-	-	12.5×13.5	0.32	4.8	300	
		-	-	-	10×10	0.50	10	200	-	-	-	-	
100		12.5×13.5	0.25	3.75	400	16×16.5	0.24	3.6	480	16×16.5	0.24	3.6	480
220		16×16.5	0.22	3.3	500	16×21.5	0.18	2.7	600	18×21.5	0.16	2.4	700
330		16×16.5	0.22	3.3	500	18×21.5	0.12	1.8	1000	-	-	-	-
470		16×21.5	0.16	2.4	650	-	-	-	-	-	-	-	-

(Note) Rated ripple current : 125°C , 100kHz  
ESR : 100kHz

**Chip Type 150°C Use, Low ESR, For Vibration Capacitors**

GREEN CAP

SMD

Vibration Resistance

Low ESR


150°C 1000hours

Anti-cleaning solvent

- Compatible with surface mounting.
- For Vibration resistance. (30G guaranteed)
- Supplied with carrier taping.
- Guaranteed 1000 hours at 150°C.



Marking color : Black print




**Specifications**

Item	Performance																
Category temperature range (°C)	-40 to +150																
Tolerance at rated capacitance (%)	±20 (20°C, 120Hz)																
Leakage current (µA) (max.)	Less than 0.02CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (µF), V : Rated voltage (V) (20°C)																
Tangent of loss angle (tanδ)	<table border="1"> <tr> <th>Rated voltage (V)</th> <td>10</td> <td>16</td> <td>25</td> <td>35</td> </tr> <tr> <th>tanδ (max.)</th> <td>0.26</td> <td>0.20</td> <td>0.16</td> <td>0.14</td> </tr> </table>	Rated voltage (V)	10	16	25	35	tanδ (max.)	0.26	0.20	0.16	0.14						
	Rated voltage (V)	10	16	25	35												
tanδ (max.)	0.26	0.20	0.16	0.14													
0.02 is added to every 1000µF increase over 1000µF (20°C, 120Hz)																	
Characteristics at high and low temperature	<table border="1"> <tr> <th>Rated voltage (V)</th> <td>10</td> <td>16</td> <td>25</td> <td>35</td> </tr> <tr> <th rowspan="2">Impedance ratio (max.)</th> <td>Z-25°C/Z+20°C</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z-40°C/Z+20°C</td> <td>7</td> <td>5</td> <td>3</td> <td>3</td> </tr> </table>	Rated voltage (V)	10	16	25	35	Impedance ratio (max.)	Z-25°C/Z+20°C	3	2	2	2	Z-40°C/Z+20°C	7	5	3	3
	Rated voltage (V)	10	16	25	35												
Impedance ratio (max.)	Z-25°C/Z+20°C	3	2	2	2												
	Z-40°C/Z+20°C	7	5	3	3												
(120Hz)																	
Endurance (150°C) (Applied ripple current)	Test time	1000 hours															
	Leakage current	The initial specified value or less															
	Percentage of capacitance change	Within ±30% of initial value															
	Tangent of loss angle	300% or less of the initial specified value															
Shelf life (150°C)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1																
Applicable standards	JIS C5101 - 1, - 18 (IEC 60384 - 1, - 18)																

**Outline Drawing**

Unit : mm

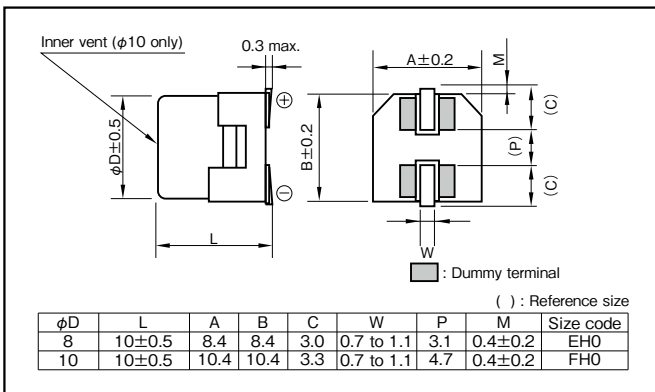

Refer to individual page.  
(Soldering conditions, Land pattern size, The taping specifications)

**Coefficient of Frequency for Rated Ripple Current**

Frequency (Hz)	120	1k	10k	100k	
Rated voltage (V)	10 to 35	0.77	0.88	0.96	1

Product code system : 35V100µF  
(\*For automotive: powertrain, safety)

RA*	VTQ	101	M	1G	FH0		U
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Taping and packing code	Additional code

For details, refer to the various "Product Code System" pages.

**Standard Ratings**

Rated voltage (V) \ Rated capacitance (µF)	10 (1L)				16 (1E)				25 (1T)			
	Case φD×L (mm)	Size code	ESR (Ω max.)	Rated ripple current (mArms)	Case φD×L (mm)	Size code	ESR (Ω max.)	Rated ripple current (mArms)	Case φD×L (mm)	Size code	ESR (Ω max.)	Rated ripple current (mArms)
47	—	—	—	—	8 × 10	EH0	0.70	120	8 × 10	EH0	0.70	120
68	—	—	—	—	8 × 10	EH0	0.70	120	8 × 10	EH0	0.70	120
100	8 × 10	EH0	0.70	120	8 × 10	EH0	0.70	120	8 × 10	EH0	0.70	120
150	—	—	—	—	10 × 10	FH0	0.40	160	10 × 10	FH0	0.40	160
220	8 × 10	EH0	0.70	120	10 × 10	FH0	0.40	160	10 × 10	FH0	0.40	160
330	10 × 10	FH0	0.40	160	10 × 10	FH0	0.40	160	—	—	—	—
470	10 × 10	FH0	0.40	160	—	—	—	—	—	—	—	—

Rated voltage (V) \ Rated capacitance (µF)	35 (1G)			
	Case φD×L (mm)	Size code	ESR (Ω max.)	Rated ripple current (mArms)
33	8 × 10	EH0	0.70	120
47	8 × 10	EH0	0.70	120
68	8 × 10	EH0	0.70	120
100	10 × 10	FH0	0.40	160
150	10 × 10	FH0	0.40	160

(Note) Rated ripple current : 150°C, 100kHz ; ESR : 20°C, 100kHz

**NOTE** : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

**Miniature Type Aluminum Electrolytic Capacitors**



Product Code System




The Elna product code is Max.20 digits.

Example) RJD series 100V 22μF φ 8x12L

New product code  
RSRJD220M1HE12300T

Old product code  
RJD-100V220MG3#



1 Product group

R : Energy devices  
(Electrolytic capacitor)

2 Category

- S : For general
- \* A : For automotive (powertrain, safety)
- \* C : For automotive (body, info)
- M : For medical  
(international classification III)
- L : For medical  
(international classification I , II)

\* AEC-Q200 Qualified.

3-5 Series code

\* Please refer to each series page.

The following changes the series code.

For Audio

old code	New code
ROB	R0B
RFO	R0F

\* Change alphabet "O" into zero "0".

10-11 Rated voltage code

voltage (V)	Code
4	1A
6.3	1J
10	1L
16	1E
25	1T
35	1G
50	1U
63	4E
100	1H
160	2R
200	1K
250	1Q
315	9G
350	7U
400	4H
450	1N

12 Diameter code

D(mm)	Code
4	B
5	C
6.3	D
8	E
10	F
12.5	G
16	J
18	K

13-14 Length code

L(mm)	Code
5	05
7	07
10	10
11	11
11.5	11
12	12
12.5	12
.	.
.	.
.	.
50	50

6-8 Rated capacitance code

The code denoting nominal capacitance shall consist of three numerals.

The first and second numerals shall represent the significant figures of nominal capacitance in the unit of microfarad (μF), And the third numeral shall represent the number of zeros following the significant figures.

Example

Rated capacitance (μF)	Code
0.1	R10
1	010
2.2	2R2
33	330
100	101
2200	222
33000	333
470000	474

15-17 Lead forming and Packing code

Example

Contents	code
Long lead standard packing	300

\* Please contact us for lead forming, cutting, taping and special packaging.

18-20 Additional code

Example

Code	Contents
T	Sn 100% plated and PET sleeve

\* Please contact us for details.

9 Capacitance tolerance code

Example


Tolerance (%)	Code
± 10	K
± 20	M
0 to +30	A
-10 to +30	Q
-10 to +50	T

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.


### 5mm L, Standard Capacitors

GREEN CAP

• Diameters from  $\phi 4$  to  $\phi 8$ mm and a height of 5mm.

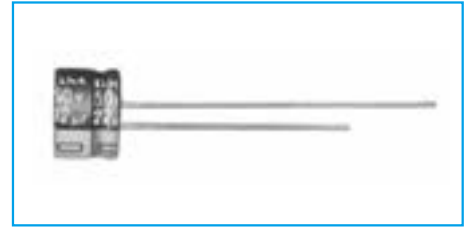

Marking color : White print on a blue sleeve




### Specifications

Item	Performance	
Category temperature range (°C)	-40 to +85	
Tolerance at rated capacitance (%)	±20 (20°C, 120Hz)	
Leakage current (µA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (µF); V : Rated voltage (V) (20°C)	
Tangent of loss angle (tanδ)	Rated voltage (V)	
	tanδ (max.)	
Characteristics at high and low temperature	Rated voltage (V)	
	Impedance ratio (max.)	
Endurance (85°C) (Applied ripple current)	Test time	
	Leakage current	
Shelf life (85°C)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1	
	Applicable standards	

### Outline Drawing

Unit : mm

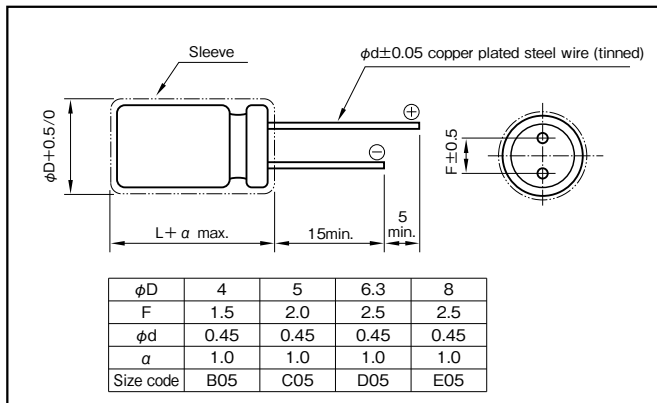

### Coefficient of Frequency for Rated Ripple Current

Rated voltage (V)	Frequency (Hz)			
	50 · 60	120	1k	10k · 100k
4 to 16	0.8	1	1.1	1.2
25 to 35	0.8	1	1.5	1.7
50	0.8	1	1.6	1.9

Product code system : 6.3V100µF (\*For general product)

RS*	RC3	101	M	1J	D05		T
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Lead-forming and packing code	Additional code

For details, refer to the various "Product Code System" pages.

### Standard Ratings

Rated capacitance (µF)	4 (1A)		6.3 (1J)		10 (1L)		16 (1E)		25 (1T)		35 (1G)		50 (1U)	
	Case φD×L (mm)	Rated ripple current (mA <sub>rms</sub> )	Case φD×L (mm)	Rated ripple current (mA <sub>rms</sub> )	Case φD×L (mm)	Rated ripple current (mA <sub>rms</sub> )	Case φD×L (mm)	Rated ripple current (mA <sub>rms</sub> )	Case φD×L (mm)	Rated ripple current (mA <sub>rms</sub> )	Case φD×L (mm)	Rated ripple current (mA <sub>rms</sub> )	Case φD×L (mm)	Rated ripple current (mA <sub>rms</sub> )
1	—	—	—	—	—	—	—	—	—	—	—	—	4×5	10
2.2	—	—	—	—	—	—	—	—	—	—	4×5	14	4×5	15
3.3	—	—	—	—	—	—	—	—	4×5	15	4×5	17	4×5	18
4.7	—	—	—	—	—	—	4×5	17	4×5	18	4×5	20	5×5	25
10	—	—	4×5	20	4×5	22	4×5	25	5×5	30	5×5	30	6.3×5	40
22	4×5	25	4×5	30	5×5	35	5×5	40	6.3×5	50	6.3×5	55	8×5	75
33	4×5	30	5×5	40	5×5	45	6.3×5	60	6.3×5	65	8×5	80	8×5	90
47	4×5	35	5×5	50	6.3×5	65	6.3×5	70	8×5	95	8×5	100	—	—
100	5×5	60	6.3×5	85	6.3×5	95	8×5	125	8×5	135	—	—	—	—
220	6.3×5	105	8×5	145	8×5	155	—	—	—	—	—	—	—	—
330	8×5	150	8×5	175	—	—	—	—	—	—	—	—	—	—
470	8×5	180	—	—	—	—	—	—	—	—	—	—	—	—

(Note) Rated ripple current : 85°C, 120Hz.

NOTE : Design, Specifications are subject to change without notice. It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

## 5mm L, 105°C Use Capacitors

GREEN CAP


105°C  
1000hours

Anti-cleaning solvent

- Diameters from  $\phi 4$  to  $\phi 6.3$ mm and a height of 5mm.
- Guarantees 1000 hours at 105°C.



High temperature

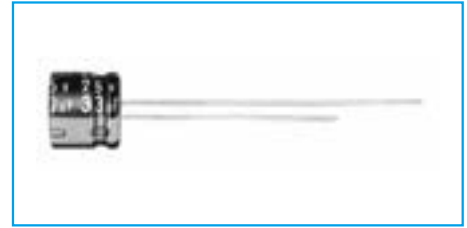


Marking color : White print on a black sleeve

### Specifications

Item	Performance																				
Category temperature range (°C)	-55 to +105																				
Tolerance at rated capacitance (%)	±20 (20°C, 120Hz)																				
Leakage current (µA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (µF); V : Rated voltage (V) (20°C)																				
Tangent of loss angle (tanδ)	<table border="1"> <thead> <tr> <th>Rated voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> </tr> </thead> <tbody> <tr> <td>tanδ (max.)</td> <td>0.28</td> <td>0.24</td> <td>0.20</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> </tr> </tbody> </table> <p>(20°C, 120Hz)</p>	Rated voltage (V)	6.3	10	16	25	35	50	tanδ (max.)	0.28	0.24	0.20	0.14	0.12	0.10						
Rated voltage (V)	6.3	10	16	25	35	50															
tanδ (max.)	0.28	0.24	0.20	0.14	0.12	0.10															
Characteristics at high and low temperature	<table border="1"> <thead> <tr> <th>Rated voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> </tr> </thead> <tbody> <tr> <td rowspan="2">Impedance ratio (max.)</td> <td>Z-25°C/Z+20°C</td> <td>3</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z-40°C/Z+20°C</td> <td>8</td> <td>5</td> <td>4</td> <td>3</td> <td>3</td> </tr> </tbody> </table> <p>(120Hz)</p>	Rated voltage (V)	6.3	10	16	25	35	50	Impedance ratio (max.)	Z-25°C/Z+20°C	3	3	2	2	2	Z-40°C/Z+20°C	8	5	4	3	3
Rated voltage (V)	6.3	10	16	25	35	50															
Impedance ratio (max.)	Z-25°C/Z+20°C	3	3	2	2	2															
	Z-40°C/Z+20°C	8	5	4	3	3															
Endurance (105°C) (Applied ripple current)	<table border="1"> <tbody> <tr> <td>Test time</td> <td>1000 hours</td> </tr> <tr> <td>Leakage current</td> <td>The initial specified value or less</td> </tr> <tr> <td>Percentage of capacitance change</td> <td>Within ±20% of initial value</td> </tr> <tr> <td>Tangent of the loss angle</td> <td>200% or less of the initial specified value</td> </tr> </tbody> </table>	Test time	1000 hours	Leakage current	The initial specified value or less	Percentage of capacitance change	Within ±20% of initial value	Tangent of the loss angle	200% or less of the initial specified value												
Test time	1000 hours																				
Leakage current	The initial specified value or less																				
Percentage of capacitance change	Within ±20% of initial value																				
Tangent of the loss angle	200% or less of the initial specified value																				
Shelf life (105°C)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1																				
Applicable standards	JIS C5101 - 1,- 4 (IEC 60384 - 1,- 4)																				

### Outline Drawing

Unit : mm

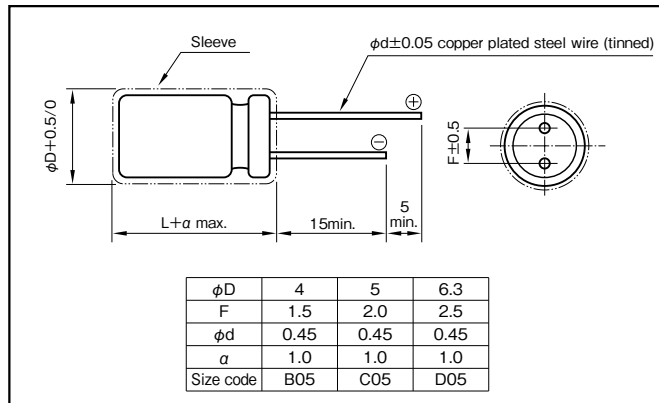

### Coefficient of Frequency for Rated Ripple Current

Frequency (Hz)	50 · 60	120	1k	10k · 100k
Rated voltage (V)				
6.3 to 16	0.64	0.80	0.92	1
25 to 35	0.57	0.71	0.89	1
50	0.53	0.67	0.90	1

### Product code system : 16V47µF (\*For general product)

RS*	R3S	470	M	1E	D05	T
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Lead-forming and packing code
						Additional code

For details, refer to the various "Product Code System" pages.

### Standard Ratings

Rated voltage (V)	6.3 (1J)		10 (1L)		16 (1E)		25 (1T)		35 (1G)		50 (1U)	
	Case	Rated ripple current	Case	Rated ripple current	Case	Rated ripple current	Case	Rated ripple current	Case	Rated ripple current	Case	Rated ripple current
Rated capacitance (µF)	$\phi D \times L$ (mm)	(mAmps)	$\phi D \times L$ (mm)	(mAmps)	$\phi D \times L$ (mm)	(mAmps)	$\phi D \times L$ (mm)	(mAmps)	$\phi D \times L$ (mm)	(mAmps)	$\phi D \times L$ (mm)	(mAmps)
1	—	—	—	—	—	—	—	—	—	—	4×5	11
2.2	—	—	—	—	—	—	—	—	—	—	4×5	17
3.3	—	—	—	—	—	—	—	—	4×5	17	4×5	20
4.7	—	—	—	—	4×5	15	4×5	18	4×5	20	5×5	27
10	—	—	4×5	20	4×5	23	5×5	31	5×5	34	6.3×5	45
22	4×5	26	5×5	34	5×5	38	6.3×5	53	6.3×5	57	—	—
33	5×5	33	5×5	43	6.3×5	56	6.3×5	66	—	—	—	—
47	5×5	45	6.3×5	58	6.3×5	65	—	—	—	—	—	—
100	6.3×5	78	—	—	—	—	—	—	—	—	—	—



(Note) Rated ripple current : 105°C, 100kHz.

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

## 5mm L, Bipolar Capacitors

GREEN CAP

- Diameters from  $\phi 4$  to  $\phi 6.3$ mm and a height of 5mm.

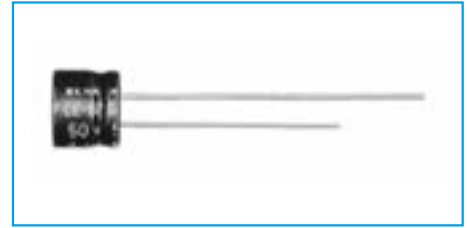


Marking color : White print on a blue sleeve

### Specifications

Item	Performance																							
Category temperature range (°C)	-40 to +85																							
Tolerance at rated capacitance (%)	±20 (20°C, 120Hz)																							
Leakage current (µA) (max.)	0.03CV + 3 (after 5 minutes) C : Rated capacitance (µF); V : Rated voltage (V) (20°C)																							
Tangent of loss angle (tanδ)	<table border="1"> <thead> <tr> <th colspan="2">Rated voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> </tr> </thead> <tbody> <tr> <td rowspan="2">tanδ (max.)</td> <td><math>\phi 4</math></td> <td>0.35</td> <td>0.30</td> <td>0.25</td> <td>0.20</td> <td>0.20</td> <td>0.20</td> </tr> <tr> <td><math>\phi 5, 6.3</math></td> <td>0.30</td> <td>0.25</td> <td>0.20</td> <td>0.15</td> <td>0.15</td> <td>0.15</td> </tr> </tbody> </table>	Rated voltage (V)		6.3	10	16	25	35	50	tanδ (max.)	$\phi 4$	0.35	0.30	0.25	0.20	0.20	0.20	$\phi 5, 6.3$	0.30	0.25	0.20	0.15	0.15	0.15
	Rated voltage (V)		6.3	10	16	25	35	50																
tanδ (max.)	$\phi 4$	0.35	0.30	0.25	0.20	0.20	0.20																	
	$\phi 5, 6.3$	0.30	0.25	0.20	0.15	0.15	0.15																	
Endurance (85°C)	Test time	1000 hours (with the polarity inverted every 250 hours)																						
	Leakage current	The initial specified value or less																						
	Percentage of capacitance change	Within ±20% of initial value																						
	Tangent of the loss angle	200% or less of the initial specified value																						
Applicable standards	JIS C5101 - 1, - 4 (IEC 60384 - 1, - 4)																							

### Outline Drawing

Unit : mm

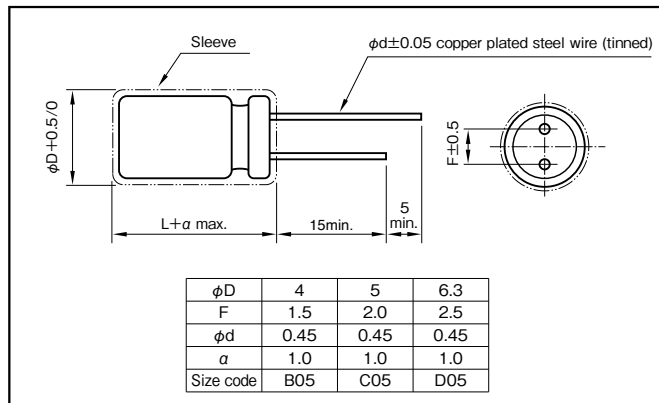

### Coefficient of Frequency for Rated Ripple Current

Rated voltage (V)	Frequency (Hz)			
	50 · 60	120	1k	10k · 100k
6.3 to 16	0.8	1	1.1	1.2
25 to 35	0.8	1	1.5	1.7
50	0.8	1	1.6	1.9

Product code system : 10V47µF (\*For general product)

RS*	RB3	470	M	1L	D05		T
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Lead-forming and packing code	Additional code

For details, refer to the various "Product Code System" pages.

### Standard Ratings

Rated voltage (V)	6.3 (1J)		10 (1L)		16 (1E)		25 (1T)		35 (1G)		50 (1U)	
	Case	Rated ripple current (mArms)	Case	Rated ripple current (mArms)	Case	Rated ripple current (mArms)	Case	Rated ripple current (mArms)	Case	Rated ripple current (mArms)	Case	Rated ripple current (mArms)
Rated capacitance (µF)	$\phi D \times L$ (mm)		$\phi D \times L$ (mm)		$\phi D \times L$ (mm)		$\phi D \times L$ (mm)		$\phi D \times L$ (mm)		$\phi D \times L$ (mm)	
0.33	—	—	—	—	—	—	—	—	—	—	4×5	4
0.47	—	—	—	—	—	—	—	—	—	—	4×5	5
1	—	—	—	—	—	—	—	—	—	—	4×5	7
2.2	—	—	—	—	—	—	—	—	4×5	11	5×5	14
3.3	—	—	—	—	—	—	4×5	13	5×5	17	6.3×5	20
4.7	—	—	—	—	4×5	14	5×5	21	6.3×5	24	6.3×5	24
10	—	—	4×5	18	5×5	26	6.3×5	35	6.3×5	35	—	—
22	5×5	31	6.3×5	40	6.3×5	45	—	—	—	—	—	—
33	6.3×5	45	6.3×5	49	—	—	—	—	—	—	—	—
47	6.3×5	54	6.3×5	59	—	—	—	—	—	—	—	—

(Note) Rated ripple current : 85°C, 120Hz.


## 7mm L, Standard Capacitors

GREEN CAP Anti-cleaning solvent

- Diameters from  $\phi 4$  to  $\phi 8$ mm and a height of 7mm.
- Guarantees 1000 hours at 85°C.



Marking color : White print on a blue sleeve




### Specifications

Item	Performance										
Category temperature range (°C)	-40 to +85										
Tolerance at rated capacitance (%)	±20 (20°C, 120Hz)										
Leakage current (µA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (µF); V : Rated voltage (V) (20°C)										
Tangent of loss angle (tanδ)	Rated voltage (V)	4	6.3	10	16	25	35	50	63	100	
	tanδ (max.)	0.35	0.24	0.20	0.16	0.14	0.12	0.10	0.08	0.08	
Characteristics at high and low temperature	Rated voltage (V)	4	6.3	10	16	25	35	50	63	100	
	Impedance ratio (max.)	Z-25°C/Z+20°C	6	4	3	2	2	2	2	2	2
		Z-40°C/Z+20°C	16	10	8	6	4	4	4	4	4
Endurance (85°C) (Applied ripple current)	Test time	1000 hours									
	Leakage current	The initial specified value or less									
	Percentage of capacitance change	Within ±20% of initial value									
	Tangent of the loss angle	200% or less of the initial specified value									
Shelf life (85°C)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1										
Applicable standards	JIS C5101 - 1,- 4 (IEC 60384 - 1,- 4)										

### Outline Drawing

Unit : mm

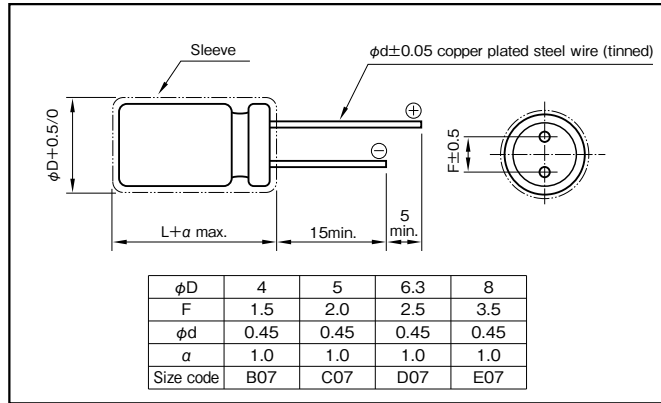

### Coefficient of Frequency for Rated Ripple Current

Rated voltage (V) \ Frequency (Hz)	50 · 60	120	1k	10k · 100k
4 to 16	0.8	1	1.1	1.2
25 to 35	0.8	1	1.5	1.7
50 to 100	0.8	1	1.6	1.9

### Product code system : 10V220µF (\*For general product)

Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Lead-forming and packing code	Additional code
RS*	RC2	221	M	1L	E07		T

For details, refer to the various "Product Code System" pages.

### Standard Ratings

Rated voltage (V) \ Rated capacitance (µF)	4 (1A)		6.3 (1J)		10 (1L)		16 (1E)		25 (1T)		35 (1G)		50 (1U)		63 (4E)		100 (1H)	
	Case	Rated ripple current (mA)	Case	Rated ripple current (mA)	Case	Rated ripple current (mA)	Case	Rated ripple current (mA)	Case	Rated ripple current (mA)	Case	Rated ripple current (mA)	Case	Rated ripple current (mA)	Case	Rated ripple current (mA)	Case	Rated ripple current (mA)
1	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2.2	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
3.3	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
4.7	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
10	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
22	—	—	4×7	35	4×7	35	4×7	40	5×7	30	5×7	55	6.3×7	70	—	—	—	—
33	4×7	35	4×7	40	4×7	45	5×7	55	6.3×7	70	6.3×7	75	8×7	100	—	—	—	—
47	4×7	40	4×7	50	5×7	60	5×7	70	6.3×7	85	8×7	110	—	—	—	—	—	—
100	5×7	70	5×7	80	6.3×7	105	6.3×7	120	8×7	145	—	—	—	—	—	—	—	—
220	6.3×7	120	6.3×7	140	8×7	185	8×7	205	—	—	—	—	—	—	—	—	—	—
330	8×7	170	8×7	205	—	—	—	—	—	—	—	—	—	—	—	—	—	—

(Note) Rated ripple current : 85°C, 120Hz.

NOTE : Design, Specifications are subject to change without notice. It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.


### 7mm L, 105°C Use Capacitors

GREEN CAP

105°C  
1000hours

Anti-cleaning solvent

- Diameters from  $\phi 4$  to  $\phi 6.3$ mm and a height of 7mm.
- Guarantees 1000 hours at 105°C.

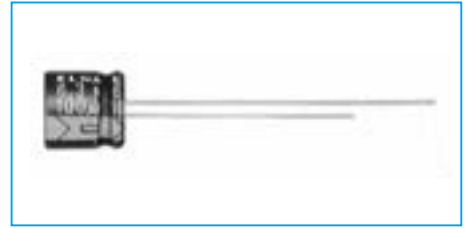

Marking color : White print on a black sleeve

R2S

High temperature


RC2

### Specifications

Item	Performance																				
Category temperature range (°C)	-55 to +105																				
Tolerance at rated capacitance (%)	±20 (20°C, 120Hz)																				
Leakage current (µA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (µF); V : Rated voltage (V) (20°C)																				
Tangent of loss angle (tanδ)	<table border="1"> <thead> <tr> <th>Rated voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> </tr> </thead> <tbody> <tr> <td>tanδ (max.)</td> <td>0.22</td> <td>0.19</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> </tr> </tbody> </table> <p>(20°C, 120Hz)</p>	Rated voltage (V)	6.3	10	16	25	35	50	tanδ (max.)	0.22	0.19	0.16	0.14	0.12	0.10						
Rated voltage (V)	6.3	10	16	25	35	50															
tanδ (max.)	0.22	0.19	0.16	0.14	0.12	0.10															
Characteristics at high and low temperature	<table border="1"> <thead> <tr> <th>Rated voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> </tr> </thead> <tbody> <tr> <td rowspan="2">Impedance ratio (max.)</td> <td>Z-25°C/Z+20°C</td> <td>3</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z-40°C/Z+20°C</td> <td>8</td> <td>5</td> <td>4</td> <td>3</td> <td>3</td> </tr> </tbody> </table> <p>(120Hz)</p>	Rated voltage (V)	6.3	10	16	25	35	50	Impedance ratio (max.)	Z-25°C/Z+20°C	3	3	2	2	2	Z-40°C/Z+20°C	8	5	4	3	3
Rated voltage (V)	6.3	10	16	25	35	50															
Impedance ratio (max.)	Z-25°C/Z+20°C	3	3	2	2	2															
	Z-40°C/Z+20°C	8	5	4	3	3															
Endurance (105°C) (Applied ripple current)	<table border="1"> <tbody> <tr> <td>Test time</td> <td>1000 hours</td> </tr> <tr> <td>Leakage current</td> <td>The initial specified value or less</td> </tr> <tr> <td>Percentage of capacitance change</td> <td>Within ±20% of initial value</td> </tr> <tr> <td>Tangent of the loss angle</td> <td>200% or less of the initial specified value</td> </tr> </tbody> </table>	Test time	1000 hours	Leakage current	The initial specified value or less	Percentage of capacitance change	Within ±20% of initial value	Tangent of the loss angle	200% or less of the initial specified value												
Test time	1000 hours																				
Leakage current	The initial specified value or less																				
Percentage of capacitance change	Within ±20% of initial value																				
Tangent of the loss angle	200% or less of the initial specified value																				
Shelf life (105°C)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1																				
Applicable standards	JIS C5101 - 1,- 4 (IEC 60384 - 1,- 4)																				

### Outline Drawing

Unit : mm

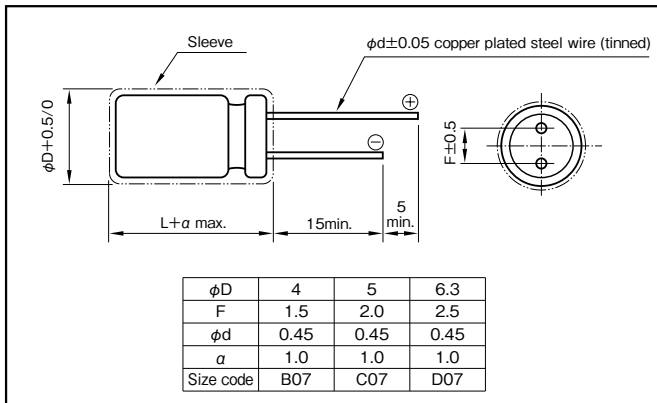

### Coefficient of Frequency for Rated Ripple Current

Rated voltage (V) \ Frequency (Hz)	50 · 60	120	1k	10k · 100k
6.3 to 16	0.68	0.72	0.92	1
25 to 35	0.48	0.63	0.80	1
50	0.45	0.50	0.70	1

### Product code system : 25V33µF (\*For general product)

RS*	R2S	330	M	1T	D07	T
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Lead-forming and packing code
						Additional code

For details, refer to the various "Product Code System" pages.

### Standard Ratings

Rated voltage (V) \ Item	6.3 (1J)		10 (1L)		16 (1E)		25 (1T)		35 (1G)		50 (1U)	
	Case	Rated ripple current (mArms)	Case	Rated ripple current (mArms)	Case	Rated ripple current (mArms)	Case	Rated ripple current (mArms)	Case	Rated ripple current (mArms)	Case	Rated ripple current (mArms)
Rated capacitance (µF)	φD × L (mm)		φD × L (mm)		φD × L (mm)		φD × L (mm)		φD × L (mm)		φD × L (mm)	
1	—	—	—	—	—	—	—	—	—	—	4 × 7	16
2.2	—	—	—	—	—	—	—	—	—	—	4 × 7	25
3.3	—	—	—	—	—	—	4 × 7	21	4 × 7	23	4 × 7	28
4.7	—	—	—	—	—	—	4 × 7	25	4 × 7	25	5 × 7	48
10	—	—	—	—	4 × 7	39	5 × 7	47	5 × 7	48	6.3 × 7	75
22	4 × 7	42	4 × 7	49	5 × 7	54	6.3 × 7	87	6.3 × 7	90	—	—
33	5 × 7	53	5 × 7	60	6.3 × 7	83	6.3 × 7	90	—	—	—	—
47	5 × 7	64	6.3 × 7	95	6.3 × 7	95	—	—	—	—	—	—
100	6.3 × 7	96	—	—	—	—	—	—	—	—	—	—


(Note) Rated ripple current : 105°C, 100kHz.

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.


## 7mm L, Bipolar Capacitors

GREEN CAP Anti-cleaning solvent

• Diameters from  $\phi 4$  to  $\phi 6.3$ mm and a height of 7mm.

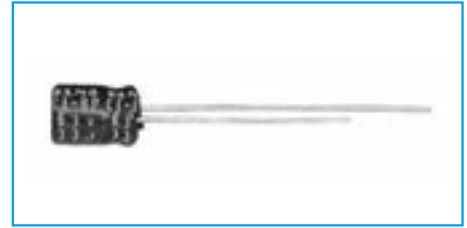

Marking color : White print on a blue sleeve




### Specifications

Item	Performance						
Category temperature range (°C)	-40 to +85						
Tolerance at rated capacitance (%)	±20 (20°C, 120Hz)						
Leakage current (µA) (max.)	0.03CV + 3 (after 5 minutes) C : Rated capacitance (µF) ; V : Rated voltage (V) (20°C)						
Tangent of loss angle (tanδ)	Rated voltage (V)	6.3	10	16	25	35	50
	tanδ (max.)	0.30	0.25	0.20	0.15	0.15	0.15
Endurance (85°C)	Test time	1000 hours (with the polarity inverted every 250 hours)					
	Leakage current	The initial specified value or less					
	Percentage of capacitance change	Within ±20% of initial value					
	Tangent of the loss angle	200% or less of the initial specified value					
Applicable standards	JIS C5101 - 1, - 4 (IEC 60384 - 1, - 4)						

### Outline Drawing

Unit : mm

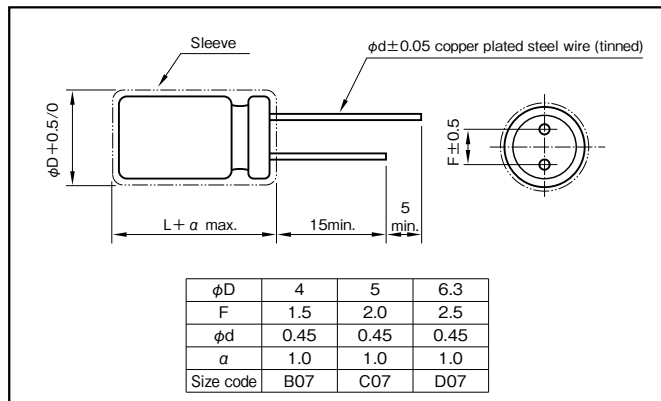

### Coefficient of Frequency for Rated Ripple Current

Frequency (Hz)	50 · 60	120	1k	10k · 100k
Rated voltage (V)				
6.3 to 16	0.8	1	1.1	1.2
25 to 35	0.8	1	1.5	1.7
50	0.8	1	1.6	1.9

### Product code system : 16V47µF (\*For general product)

Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Lead-forming and packing code	Additional code
RS*	RB2	470	M	1E	D07		T

For details, refer to the various "Product Code System" pages.

### Standard Ratings

Rated voltage (V)	Item	6.3 (1J)		10 (1L)		16 (1E)		25 (1T)		35 (1G)		50 (1U)	
		Case	Rated ripple current	Case	Rated ripple current	Case	Rated ripple current	Case	Rated ripple current	Case	Rated ripple current	Case	Rated ripple current
Rated capacitance (µF)		φD × L (mm)	(mArms)	φD × L (mm)	(mArms)	φD × L (mm)	(mArms)	φD × L (mm)	(mArms)	φD × L (mm)	(mArms)	φD × L (mm)	(mArms)
0.33	—	—	—	—	—	—	—	—	—	—	—	4×7	5
0.47	—	—	—	—	—	—	—	—	—	—	—	4×7	6
1	—	—	—	—	—	—	—	—	—	—	—	4×7	9
2.2	—	—	—	—	—	—	—	—	—	4×7	14	5×7	16
3.3	—	—	—	—	—	—	—	4×7	17	5×7	19	5×7	19
4.7	—	—	—	—	—	4×7	17	5×7	23	5×7	23	6.3×7	27
10	—	—	—	4×7	23	5×7	29	6.3×7	39	6.3×7	39	—	—
22	5×7	35	—	5×7	39	6.3×7	50	6.3×7	58	—	—	—	—
33	5×7	43	—	6.3×7	55	6.3×7	61	6.3×7	71	—	—	—	—
47	6.3×7	60	—	6.3×7	66	6.3×7	73	—	—	—	—	—	—

(Note) Rated ripple current : 85°C, 120Hz.

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

## Standard Capacitors

GREEN CAP Anti-cleaning solvent 250V Max.

•Guarantees 2000 hours at 85°C.

RJ4

High temperature

RE3




Marking color : White print on a blue sleeve

### Specifications

Item	Performance																																															
Category temperature range (°C)	-40 to +85																																															
Tolerance at rated capacitance (%)	±20 (20°C, 120Hz)																																															
Leakage current (µA)	<table border="1"> <tr> <th>Rated voltage (V)</th> <th>6.3 to 100</th> <th>160 to 450</th> </tr> <tr> <td>Leakage current (µA) (max.)</td> <td>0.03CV or 4 whichever is larger (after 1 minute) 0.01CV or 3 whichever is larger (after 2 minutes)</td> <td>CV≤1000 : 0.1CV+40 (after 1 minute) CV&gt;1000 : 0.04CV+100 (after 1 minute)</td> </tr> </table>	Rated voltage (V)	6.3 to 100	160 to 450	Leakage current (µA) (max.)	0.03CV or 4 whichever is larger (after 1 minute) 0.01CV or 3 whichever is larger (after 2 minutes)	CV≤1000 : 0.1CV+40 (after 1 minute) CV>1000 : 0.04CV+100 (after 1 minute)																																									
	Rated voltage (V)	6.3 to 100	160 to 450																																													
Leakage current (µA) (max.)	0.03CV or 4 whichever is larger (after 1 minute) 0.01CV or 3 whichever is larger (after 2 minutes)	CV≤1000 : 0.1CV+40 (after 1 minute) CV>1000 : 0.04CV+100 (after 1 minute)																																														
C : Rated capacitance (µF) V: Rated voltage (V) (20°C)																																																
Tangent of loss angle (tanδ)	<table border="1"> <tr> <th>Rated voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>100</th> <th>160</th> <th>200</th> <th>250</th> <th>315</th> <th>350</th> <th>400</th> <th>450</th> </tr> <tr> <td>tanδ (max.)</td> <td>0.28</td> <td>0.24</td> <td>0.20</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> <td>0.08</td> <td>0.20</td> <td>0.20</td> <td>0.20</td> <td>0.24</td> <td>0.24</td> <td>0.24</td> <td>0.24</td> </tr> </table> <p>0.02 is added to every 1000µF increase over 1000µF. (20°C, 120Hz)</p>	Rated voltage (V)	6.3	10	16	25	35	50	63	100	160	200	250	315	350	400	450	tanδ (max.)	0.28	0.24	0.20	0.16	0.14	0.12	0.10	0.08	0.20	0.20	0.20	0.24	0.24	0.24	0.24															
Rated voltage (V)	6.3	10	16	25	35	50	63	100	160	200	250	315	350	400	450																																	
tanδ (max.)	0.28	0.24	0.20	0.16	0.14	0.12	0.10	0.08	0.20	0.20	0.20	0.24	0.24	0.24	0.24																																	
Characteristics at high and low temperature	<table border="1"> <tr> <th>Rated voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>100</th> <th>160</th> <th>200</th> <th>250</th> <th>315</th> <th>350</th> <th>400</th> <th>450</th> </tr> <tr> <td rowspan="2">Impedance ratio (max.)</td> <td>Z-25°C/Z+20°C</td> <td>5</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>4</td> <td>4</td> <td>4</td> <td>4</td> <td>4</td> <td>4</td> <td>4</td> </tr> <tr> <td>Z-40°C/Z+20°C</td> <td>12</td> <td>10</td> <td>8</td> <td>5</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> <td>15</td> <td>15</td> <td>15</td> <td>10</td> <td>10</td> <td>10</td> </tr> </table>	Rated voltage (V)	6.3	10	16	25	35	50	63	100	160	200	250	315	350	400	450	Impedance ratio (max.)	Z-25°C/Z+20°C	5	4	3	2	2	2	2	4	4	4	4	4	4	4	Z-40°C/Z+20°C	12	10	8	5	4	3	3	3	15	15	15	10	10	10
	Rated voltage (V)	6.3	10	16	25	35	50	63	100	160	200	250	315	350	400	450																																
Impedance ratio (max.)	Z-25°C/Z+20°C	5	4	3	2	2	2	2	4	4	4	4	4	4	4																																	
	Z-40°C/Z+20°C	12	10	8	5	4	3	3	3	15	15	15	10	10	10																																	
(120Hz)																																																
Endurance (85°C) (Applied ripple current)	Test time	2000 hours																																														
	Leakage current	The initial specified value or less																																														
	Percentage of capacitance change	Within ±20% of initial value																																														
	Tangent of the loss angle	200% or less of the initial specified value																																														
Shelf life (85°C)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1																																															
Applicable standards	JIS C5101 - 1, - 4 (IEC 60384 - 1, - 4)																																															

### Outline Drawing

Unit : mm

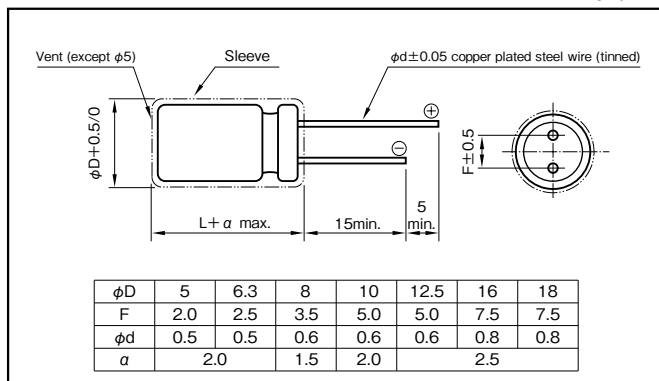

### Coefficient of Frequency for Rated Ripple Current

Rated voltage (V)	Frequency (Hz) CV (µF×VV)	50 · 60	120	1k	10k	100k
		6.3 to 16	All CV value	0.8	1	1.1
25 to 35	≤1000	0.8	1	1.5	1.7	1.7
	1000<	0.8	1	1.2	1.3	1.3
50 to 100	≤1000	0.8	1	1.6	1.9	1.9
	1000<	0.8	1	1.2	1.3	1.3
160 to 450	All CV value	0.8	1	1.3	1.5	1.6

Product code system : 16V1000µF (\*For general product)

RS*	RE3	102	M	1E	F16		T
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Lead-forming and packing code	Additional code

For details, refer to the various "Product Code System" pages.

### Case code

Size φD×L (mm)	Size code	Size φD×L (mm)	Size code
5×11	C11	12.5×25	G25
6.3×11	D11	16×25	J25
8×11.5	E11	16×31.5	J31
10×12.5	F12	16×35.5	J35
10×16	F16	18×31.5	K31
10×20	F20	18×35.5	K35
12.5×20	G20	18×40	K40

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.



## Standard Ratings

Rated voltage (V)	Item	6.3 (1J)			10 (1L)			16 (1E)			25 (1T)			35 (1G)			50 (1U)			63 (4E)			100 (1H)		
		Case	ESR	Rated ripple current (mA <sub>rms</sub> )	Case	ESR	Rated ripple current (mA <sub>rms</sub> )	Case	ESR	Rated ripple current (mA <sub>rms</sub> )	Case	ESR	Rated ripple current (mA <sub>rms</sub> )	Case	ESR	Rated ripple current (mA <sub>rms</sub> )	Case	ESR	Rated ripple current (mA <sub>rms</sub> )	Case	ESR	Rated ripple current (mA <sub>rms</sub> )	Case	ESR	Rated ripple current (mA <sub>rms</sub> )
1		—	—	—	—	—	—	—	—	—	—	—	—	—	—	5×11	199	21	—	—	—	5×11	133	21	
2.2		—	—	—	—	—	—	—	—	—	—	—	—	—	—	5×11	90.5	31	—	—	—	5×11	60.3	30	
3.3		—	—	—	—	—	—	—	—	—	—	—	—	—	—	5×11	60.3	38	—	—	—	5×11	40.2	40	
4.7		—	—	—	—	—	—	—	5×11	56.5	38	5×11	49.4	40	5×11	42.3	45	5×11	35.3	45	5×11	28.2	45		
10		—	—	—	—	—	—	5×11	33.2	50	5×11	26.5	55	5×11	23.2	59	5×11	19.9	66	5×11	16.6	66	6.3×11	13.3	75
22		—	—	—	—	—	—	5×11	15.1	75	5×11	12.1	82	5×11	10.6	87	5×11	9.1	98	5×11	7.5	100	6.3×11	6.0	130
33		—	—	—	—	—	—	5×11	10.1	92	5×11	8.0	100	5×11	7.0	107	5×11	6.0	126	6.3×11	5.0	140	8×11.5	4.0	180
47		—	—	—	5×11	8.5	99	5×11	7.1	110	5×11	5.7	118	5×11	4.9	130	6.3×11	4.2	155	6.3×11	3.5	170	10×12.5	2.8	230
100		—	—	—	5×11	3.8	146	5×11	3.3	160	6.3×11	2.7	199	6.3×11	2.3	214	8×11.5	2.0	260	8×11.5	1.7	298	10×20	1.3	370
220		5×11	2.1	200	6.3×11	1.8	240	6.3×11	1.5	264	8×11.5	1.2	349	10×12.5	1.1	443	10×12.5	0.91	443	10×16	0.75	470	12.5×20	0.60	620
330		6.3×11	1.4	270	6.3×11	1.2	290	8×11.5	1.0	383	10×12.5	0.81	510	10×12.5	0.70	542	10×16	0.60	595	10×20	0.50	710	12.5×25	0.40	760
470		6.3×11	0.99	322	8×11.5	0.85	417	8×11.5	0.71	457	10×12.5	0.57	545	10×16	0.49	664	12.5×20	0.42	887	12.5×20	0.35	900	16×25	0.28	1000
1000		8×11.5	0.47	546	10×12.5	0.40	650	10×16	0.33	791	10×20	0.27	996	12.5×20	0.23	1210	12.5×25	0.20	1400	16×25	0.17	1300	18×40	0.13	1380
2200		10×20	0.23	1010	10×20	0.20	1080	12.5×20	0.17	1350	12.5×25	0.14	1660	16×25	0.12	1950	16×35.5	0.11	2340	—	—	—	—	—	—
3300		10×20	0.16	1230	12.5×20	0.14	1430	12.5×25	0.12	1690	16×25	0.10	2030	16×35.5	0.090	2510	18×35.5	0.080	2810	—	—	—	—	—	—
4700		12.5×20	0.12	1710	12.5×25	0.11	1780	16×25	0.092	2100	16×31.5	0.078	2650	18×35.5	0.071	2990	—	—	—	—	—	—	—	—	—
6800		12.5×25	0.093	1930	16×25	0.083	2200	16×35.5	0.073	2580	18×35.5	0.063	3290	—	—	—	—	—	—	—	—	—	—	—	—
10000		16×25	0.076	2450	16×35.5	0.070	2700	18×35.5	0.063	3130	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
15000		16×35.5	0.062	2860	18×35.5	0.058	3100	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
22000		18×40	0.053	3340	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—


Rated voltage (V)	Item	160 (2R)			200 (1K)			250 (1Q)			315 (9G)			350 (7U)			400 (4H)			450 (1N)					
		Case	ESR	Rated ripple current (mA <sub>rms</sub> )	Case	ESR	Rated ripple current (mA <sub>rms</sub> )	Case	ESR	Rated ripple current (mA <sub>rms</sub> )	Case	ESR	Rated ripple current (mA <sub>rms</sub> )	Case	ESR	Rated ripple current (mA <sub>rms</sub> )	Case	ESR	Rated ripple current (mA <sub>rms</sub> )	Case	ESR	Rated ripple current (mA <sub>rms</sub> )			
0.47		6.3×11	706	15	6.3×11	706	15	6.3×11	706	15	6.3×11	847	15	6.3×11	847	15	6.3×11	847	15	8×11.5	847	18			
1		6.3×11	332	22	6.3×11	332	22	6.3×11	332	22	6.3×11	398	22	6.3×11	398	22	6.3×11	398	22	8×11.5	398	25			
2.2		6.3×11	151	32	6.3×11	151	32	6.3×11	151	32	8×11.5	181	38	8×11.5	181	38	8×11.5	181	38	10×12.5	181	43			
3.3		6.3×11	101	40	6.3×11	101	40	8×11.5	101	48	10×12.5	121	53	10×12.5	121	53	10×12.5	121	54	10×16	121	59			
4.7		6.3×11	70.6	48	8×11.5	70.6	56	8×11.5	70.6	56	10×12.5	84.7	65	10×12.5	84.7	65	10×16	84.7	71	10×20	84.7	76			
10		8×11.5	33.2	81	10×12.5	33.2	94	10×16	33.2	101	10×20	39.8	115	10×20	39.8	115	12.5×20	39.8	123	12.5×20	39.8	123			
22		10×16	15.1	151	10×20	15.1	170	12.5×20	15.1	182	12.5×20	18.1	182	12.5×25	18.1	197	12.5×25	18.1	197	16×25	18.1	226			
33		10×20	10.1	202	12.5×20	10.1	223	12.5×25	10.1	243	16×25	12.1	277	16×25	12.1	277	16×25	12.1	277	16×31.5	12.1	304			
47		12.5×20	7.06	266	12.5×20	7.06	265	12.5×25	7.06	295	16×25	8.47	330	16×25	8.47	330	16×31.5	8.47	361	16×35.5	8.47	380			
100		12.5×25	3.32	422	16×25	3.32	483	16×31.5	3.32	528	18×31.5	3.98	567	18×31.5	3.98	507	—	—	—	—	—	—	—	—	
220		16×31.5	1.51	783	18×35.5	1.51	882	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
330		18×35.5	1.01	1080	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

(Note) Rated ripple current : 85°C, 120Hz ; ESR. : 20°C, 120Hz

## Standard Bipolar Capacitors

GREEN CAP Anti-cleaning solvent

• Guarantees 2000 hours at 85°C.

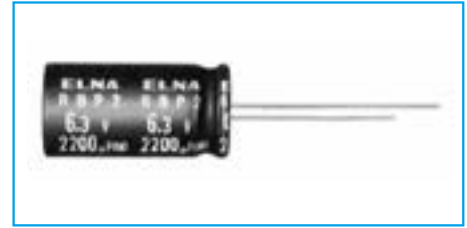


Marking color : White print on a blue sleeve

### Specifications

Item	Performance	
Category temperature range (°C)	-40 to +85	
Tolerance at rated capacitance (%)	±20 (20°C,120Hz)	
Leakage current (µA) (max.)	0.03CV + 3 (after 5 minutes) C : Rated capacitance (µF) ; V : Rated voltage (V) (20°C)	
Tangent of loss angle (tanδ)	Rated voltage (V)	6.3 10 16 25 35 50 63 100
	tan δ (max.)	0.24 0.24 0.20 0.20 0.16 0.14 0.12 0.10
0.02 is added to every 1000µF increase over 1000µF (20°C,120Hz)		
Characteristics at high and low temperature	Rated voltage (V)	6.3 10 16 25 35 50 63 100
	Impedance ratio (max.)	Z-25°C/Z+20°C 4 3 2 2 2 2 2 2 Z-40°C/Z+20°C 10 8 6 4 3 3 3 3
0.5 for -25°C, 1 for -40°C are added to every 1000µF increase over 1000µF (120Hz)		
Endurance (85°C) (Applied ripple current)	Test time	2000 hours (with the polarity inverted every 250 hours)
	Leakage current	The initial specified value or less
	Percentage of capacitance change	Within ±20% of initial value
	Tangent of the loss angle	150% or less of the initial specified value
Shelf life (85°C)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1	
Applicable standards	JIS C5101 - 1, - 4 (IEC 60384 - 1, - 4)	

### Outline Drawing

Unit : mm

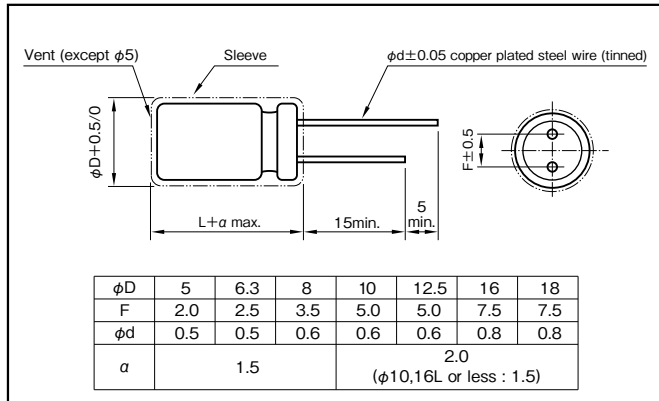

### Coefficient of Frequency for Rated Ripple Current

Rated voltage (V) \ Frequency (Hz)	50 · 60	120	1k	10k · 100k
6.3 to 16	0.8	1	1.1	1.2
25 to 35	0.8	1	1.5	1.7
50 to 100	0.8	1	1.6	1.9

Product code system : 10V1000µF (\*For general product)

RS*	R2B	102	M	1L	G20	T
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Lead-forming and packing code

For details, refer to the various "Product Code System" pages.

### Size code

Case φD×L (mm)	Size code	Case φD×L (mm)	Size code	Case φD×L (mm)	Size code	Case φD×L (mm)	Size code
5×11	C11	10×12.5	F12	12.5×20	G20	16×31.5	J31
6.3×11	D11	10×16	F16	12.5×25	G25	18×35.5	K35
8×11.5	E11	10×20	F20	16×25	J25		

### Standard Ratings

Rated capacitance (µF)	6.3 (1J)		10 (1L)		16 (1E)		25 (1T)		35 (1G)		50 (1U)		63 (4E)		100 (1H)	
	Case φD×L (mm)	Rated ripple current (mA Arms)	Case φD×L (mm)	Rated ripple current (mA Arms)	Case φD×L (mm)	Rated ripple current (mA Arms)	Case φD×L (mm)	Rated ripple current (mA Arms)	Case φD×L (mm)	Rated ripple current (mA Arms)	Case φD×L (mm)	Rated ripple current (mA Arms)	Case φD×L (mm)	Rated ripple current (mA Arms)	Case φD×L (mm)	Rated ripple current (mA Arms)
1	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2.2	—	—	—	—	—	—	—	—	—	—	5×11	14	—	—	—	—
3.3	—	—	—	—	—	—	—	—	—	—	5×11	21	5×11	23	5×11	24
4.7	—	—	—	—	—	—	—	—	—	—	5×11	26	5×11	28	6.3×11	34
10	—	—	—	—	—	—	—	—	—	—	5×11	31	5×11	34	6.3×11	41
22	—	—	—	—	5×11	39	5×11	40	5×11	42	5×11	45	6.3×11	57	8×11.5	70
33	—	—	5×11	52	5×11	58	5×11	60	6.3×11	71	6.3×11	77	8×11.5	89	10×16	136
47	5×11	58	5×11	63	5×11	71	6.3×11	84	6.3×11	87	8×11.5	111	10×12.5	144	10×20	181
100	5×11	69	5×11	75	6.3×11	97	6.3×11	100	8×11.5	122	10×12.5	157	10×16	188	12.5×20	248
220	6.3×11	115	6.3×11	126	8×11.5	167	10×12.5	204	10×12.5	212	10×20	273	12.5×20	343	16×25	458
330	8×11.5	202	8×11.5	221	10×12.5	294	10×16	332	10×20	375	12.5×25	506	16×25	645	18×35.5	837
470	8×11.5	247	10×12.5	322	10×16	394	10×20	444	12.5×20	526	12.5×25	620	—	—	—	—
1000	10×12.5	350	10×16	420	10×20	513	12.5×20	607	12.5×25	685	16×25	861	—	—	—	—
2200	10×20	611	12.5×20	767	12.5×25	935	16×25	1120	16×31.5	1270	—	—	—	—	—	—
3300	12.5×25	1090	16×25	1380	16×31.5	1660	—	—	—	—	—	—	—	—	—	—
4700	16×25	1490	16×31.5	1760	—	—	—	—	—	—	—	—	—	—	—	—
4700	16×31.5	1880	18×35.5	2280	—	—	—	—	—	—	—	—	—	—	—	—

(Note) Rated ripple current : 85°C, 120Hz

NOTE : Design, Specifications are subject to change without notice. It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.


## 105°C Bipolar Capacitors

GREEN CAP Anti-cleaning solvent

• Guarantees 2000 hours at 105°C.



High temperature

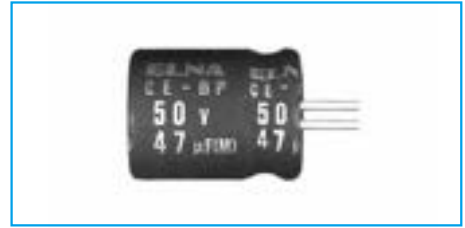


Marking color : White print on a black sleeve

### Specifications

Item	Performance																				
Category temperature range (°C)	-40 to +105																				
Tolerance at rated capacitance (%)	±20 (20°C, 120Hz)																				
Leakage current (µA) (max.)	0.03CV + 3 (after 5 minutes) C : Rated capacitance (µF) ; V : Rated voltage (V) (20°C)																				
Tangent of loss angle (tanδ)	<table border="1"> <tr> <th>Rated voltage (V)</th> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> </tr> <tr> <th>tan δ (max.)</th> <td>0.4</td> <td>0.3</td> <td>0.2</td> <td>0.2</td> <td>0.16</td> <td>0.14</td> </tr> </table>	Rated voltage (V)	6.3	10	16	25	35	50	tan δ (max.)	0.4	0.3	0.2	0.2	0.16	0.14						
	Rated voltage (V)	6.3	10	16	25	35	50														
tan δ (max.)	0.4	0.3	0.2	0.2	0.16	0.14															
0.02 is added to every 1000µF increase over 1000µF (20°C, 120Hz)																					
Characteristics at high and low temperature	<table border="1"> <tr> <th>Rated voltage (V)</th> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> </tr> <tr> <th rowspan="2">Impedance ratio (max.)</th> <td>Z-25°C/Z+20°C</td> <td>5</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z-40°C/Z+20°C</td> <td>10</td> <td>8</td> <td>6</td> <td>4</td> <td>3</td> </tr> </table>	Rated voltage (V)	6.3	10	16	25	35	50	Impedance ratio (max.)	Z-25°C/Z+20°C	5	4	3	2	2	Z-40°C/Z+20°C	10	8	6	4	3
	Rated voltage (V)	6.3	10	16	25	35	50														
Impedance ratio (max.)	Z-25°C/Z+20°C	5	4	3	2	2															
	Z-40°C/Z+20°C	10	8	6	4	3															
0.5 for -25°C, 1 for -40°C are added to every 1000µF increase over 1000µF (120Hz)																					
Endurance (105°C) (Applied ripple current)	Test time	2000 hours (φ5 to φ8 : 1000 hours) with the polarity inverted every 250 hours																			
	Leakage current	The initial specified value or less																			
	Percentage of capacitance change	Within ±20% of initial value																			
	Tangent of the loss angle	200% or less of the initial specified value																			
Shelf life (105°C)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1																				
Applicable standards	JIS C5101 - 1, - 4 (IEC 60384 - 1, - 4)																				

### Outline Drawing

Unit : mm

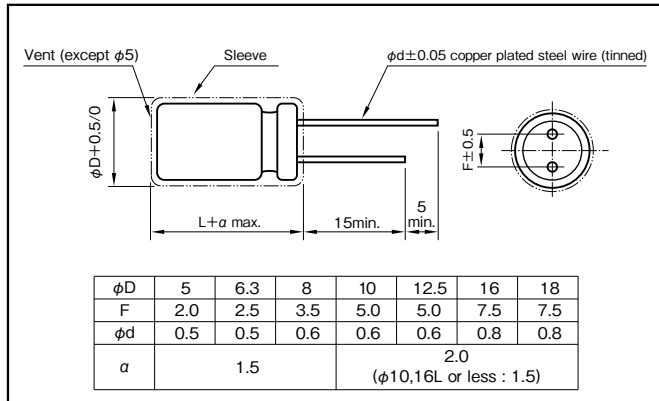

### Coefficient of Frequency for Rated Ripple Current

Frequency (Hz)	50 - 60	120	1k	10k · 100k
Rated voltage (V)				
6.3 to 16	0.8	1	1.1	1.2
25 to 35	0.8	1	1.5	1.7
50	0.8	1	1.6	1.9

Product code system : 10V1000µF (\*For general product)

RS*	RJP	102	M	1L	G20		T
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Lead-forming and packing code	Additional code

For details, refer to the various "Product Code System" pages.

### Size code

Case φD×L (mm)	Size code	Case φD×L (mm)	Size code	Case φD×L (mm)	Size code	Case φD×L (mm)	Size code
5×11	C11	10×12.5	F12	12.5×20	G20	16×31.5	J31
6.3×11.5	D11	10×16	F16	12.5×25	G25	18×35.5	K35
8×11.5	E11	10×20	F20	16×25	J25		

### Standard Ratings

Rated voltage (V)	6.3 (1J)		10 (1L)		16 (1E)		25 (1T)		35 (1G)		50 (1U)	
	Case φD × L (mm)	Rated ripple current (mArms)	Case φD × L (mm)	Rated ripple current (mArms)	Case φD × L (mm)	Rated ripple current (mArms)	Case φD × L (mm)	Rated ripple current (mArms)	Case φD × L (mm)	Rated ripple current (mArms)	Case φD × L (mm)	Rated ripple current (mArms)
1	—	—	—	—	—	—	—	—	—	—	5 × 11	12
2.2	—	—	—	—	—	—	—	—	—	—	5 × 11	18
3.3	—	—	—	—	—	—	—	—	—	—	5 × 11	22
4.7	—	—	—	—	—	—	—	—	5 × 11	25	5 × 11	22
10	—	—	—	—	5 × 11	30	5 × 11	34	5 × 11	30	6.3 × 11.5	37
22	—	—	5 × 11	42	5 × 11	40	6.3 × 11.5	55	6.3 × 11.5	51	8 × 11.5	63
33	5 × 11	46	5 × 11	45	5 × 11	49	6.3 × 11.5	56	8 × 11.5	72	8 × 11.5	77
47	5 × 11	54	5 × 11	54	6.3 × 11.5	67	6.3 × 11.5	67	8 × 11.5	86	10 × 12.5	105
100	6.3 × 11.5	90	6.3 × 11.5	96	8 × 11.5	110	8 × 11.5	110	10 × 16	160	10 × 20	190
220	8 × 11.5	150	8 × 11.5	150	10 × 12.5	195	10 × 16	215	12.5 × 20	290	12.5 × 25	340
330	8 × 11.5	185	10 × 16	240	10 × 16	265	12.5 × 20	320	12.5 × 20	350	16 × 25	460
470	10 × 12.5	260	10 × 16	290	10 × 20	345	12.5 × 20	380	12.5 × 25	465	16 × 31.5	590
1000	10 × 20	460	12.5 × 20	510	12.5 × 25	605	16 × 25	670	16 × 31.5	805	—	—
2200	12.5 × 25	820	16 × 25	910	16 × 31.5	1070	18 × 35.5	1140	—	—	—	—
3300	16 × 25	1110	16 × 31.5	1200	18 × 35.5	1400	—	—	—	—	—	—
4700	16 × 31.5	1430	18 × 35.5	1520	—	—	—	—	—	—	—	—
6800	18 × 35.5	1830	—	—	—	—	—	—	—	—	—	—


(Note) Rated ripple current : 105°C , 120Hz

NOTE : Design, Specifications are subject to change without notice. It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

## Low Leakage Current Capacitors

GREEN CAP

• Low leakage current (after 1 minute) : 0.006CV or 0.5 (μA).

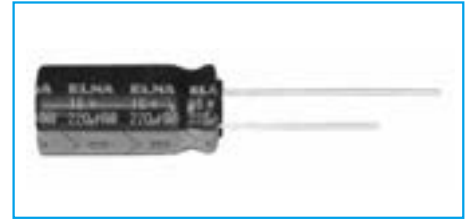


Marking color : White print on a blue sleeve

### Specifications

Item	Performance								
Category temperature range (°C)	-40 to +85								
Tolerance at rated capacitance (%)	±20 (20°C, 120Hz)								
Leakage current (μA) (max.)	0.006CV or 0.5 whichever is larger (after 1 minute) 0.002CV or 0.3 whichever is larger (after 2 minutes), C : Rated capacitance (μF) ; V : Rated voltage (V) (20°C)								
Tangent of loss angle (tanδ)	Rated voltage (V)	6.3	10	16	25	35	50		
	tanδ (max.)	More than 1μF		0.20	0.17	0.13	0.10	0.10	0.08
		1μF		0.06	0.06	0.06	0.06	0.06	0.06
		(20°C, 120Hz)							
Characteristics at high and low temperature	Rated voltage (V)	6.3	10	16	25	35	50		
	Impedance ratio (max.)	Z-25°C/Z+20°C		4	3	2	2	2	2
		Z-40°C/Z+20°C		8	6	4	4	3	3
		(120Hz)							
Endurance (85°C) (Applied ripple current)	Test time	1000 hours							
	Leakage current	The initial specified value or less							
	Percentage of capacitance change	Within ±20% of initial value							
	Tangent of the loss angle	150% or less of the initial specified value							
Shelf life (85°C)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1								
Applicable standards	JIS C5101 - 1, - 4 (IEC 60384 - 1, - 4)								

### Outline Drawing

Unit : mm

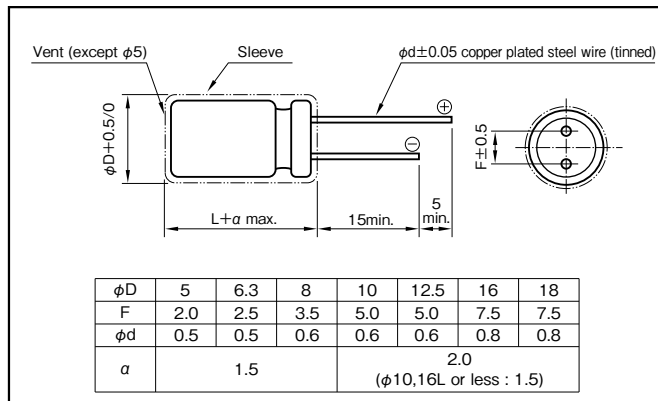

### Coefficient of Frequency for Rated Ripple Current

Rated voltage (V)	Frequency (Hz)				
	CV (μF×V)	50 · 60	120	1k	10k · 100k
6.3 to 10	All CV value	0.8	1	1.1	1.2
16 to 25	≤1000	0.8	1	1.5	1.7
	1000<	0.8	1	1.2	1.3
35 to 50	All CV value	0.8	1	1.6	1.9

Product code system : 10V1000μF (\*For general product)

RS*	RLB	102	M	1L	G25		T
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Lead-forming and packing code	Additional code

For details, refer to the various "Product Code System" pages.

### Size code

Case φD×L (mm)	Size code	Case φD×L (mm)	Size code	Case φD×L (mm)	Size code	Case φD×L (mm)	Size code
5×11	C11	10×12.5	F12	12.5×20	G20	16×31.5	J31
6.3×11	D11	10×16	F16	12.5×25	G25	16×35.5	J35
8×11.5	E11	10×20	F20	16×25	J25	18×35.5	K35

### Standard Ratings

Rated capacitance (μF)	6.3 (1J)		10 (1L)		16 (1E)		25 (1T)		35 (1G)		50 (1U)	
	Case φD×L (mm)	Rated ripple current (mA <sub>rms</sub> )	Case φD×L (mm)	Rated ripple current (mA <sub>rms</sub> )	Case φD×L (mm)	Rated ripple current (mA <sub>rms</sub> )	Case φD×L (mm)	Rated ripple current (mA <sub>rms</sub> )	Case φD×L (mm)	Rated ripple current (mA <sub>rms</sub> )	Case φD×L (mm)	Rated ripple current (mA <sub>rms</sub> )
1	—	—	—	—	—	—	—	—	—	—	5×11	20
2.2	—	—	—	—	—	—	—	—	—	—	5×11	26
3.3	—	—	—	—	—	—	—	—	—	—	5×11	32
4.7	—	—	—	—	—	—	5×11	34	5×11	34	6.3×11	43
10	—	—	—	—	5×11	43	6.3×11	57	6.3×11	57	8×11.5	75
22	—	—	5×11	56	6.3×11	74	8×11.5	99	8×11.5	99	10×12.5	131
33	—	—	6.3×11	79	6.3×11	90	8×11.5	121	10×12.5	144	10×16	176
47	—	—	6.3×11	94	8×11.5	127	10×12.5	172	10×12.5	172	10×16	210
100	—	—	8×11.5	160	10×12.5	220	10×16	270	10×20	300	12.5×20	380
220	10×12.5	260	10×16	350	10×20	390	12.5×20	510	12.5×25	550	16×25	720
330	10×16	350	10×20	420	12.5×20	550	12.5×25	680	16×25	790	16×31.5	970
470	10×20	460	12.5×20	570	12.5×20	650	16×25	940	16×25	940	16×35.5	1210
1000	12.5×25	840	12.5×25	910	16×25	1210	16×35.5	1580	18×35.5	1690	—	—
2200	16×25	1440	16×31.5	1710	18×35.5	2200	—	—	—	—	—	—


(Note) Rated ripple current : 85°C, 120Hz

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

## 105°C Miniature Capacitors

GREEN CAP 105°C 1000hours Anti-cleaning solvent 250V Max.

• Case size is one rank smaller than Series RJ4.




Marking color : White print on a black sleeve

### Specifications

Item	Performance																																															
Category temperature range (°C)	-55~+105	-40~+105																																														
Rated voltage (V)	6.3~100	160~450																																														
Tolerance at rated capacitance (%)	±20 (20°C, 120Hz)																																															
Leakage current (µA) (max.)	0.03CV or 4 whichever is larger (after 1 minute)	CV ≤ 1000 : 0.1CV+40 (after 1 minute)																																														
	0.01CV or 3 whichever is larger (after 2 minutes)	CV > 1000 : 0.04CV+100 (after 1 minute)																																														
C : Rated capacitance (µF) ; V : Rated voltage (V) (20°C)																																																
Tangent of loss angle (tanδ)	<table border="1"> <thead> <tr> <th>Rated voltage (V)</th> <th>6.3</th><th>10</th><th>16</th><th>25</th><th>35</th><th>50</th><th>63</th><th>100</th><th>160</th><th>200</th><th>250</th><th>315</th><th>350</th><th>400</th><th>450</th> </tr> </thead> <tbody> <tr> <td>tan δ (max.)</td> <td>0.34</td><td>0.26</td><td>0.20</td><td>0.16</td><td>0.14</td><td>0.12</td><td>0.10</td><td>0.08</td><td>0.20</td><td>0.20</td><td>0.20</td><td>0.24</td><td>0.24</td><td>0.24</td><td>0.24</td> </tr> </tbody> </table>																Rated voltage (V)	6.3	10	16	25	35	50	63	100	160	200	250	315	350	400	450	tan δ (max.)	0.34	0.26	0.20	0.16	0.14	0.12	0.10	0.08	0.20	0.20	0.20	0.24	0.24	0.24	0.24
	Rated voltage (V)	6.3	10	16	25	35	50	63	100	160	200	250	315	350	400	450																																
tan δ (max.)	0.34	0.26	0.20	0.16	0.14	0.12	0.10	0.08	0.20	0.20	0.20	0.24	0.24	0.24	0.24																																	
0.02 is added to every 1000µF increase over 1000µF. (20°C, 120Hz)																																																
Characteristics at high and low temperature	<table border="1"> <thead> <tr> <th>Rated voltage (V)</th> <th>6.3</th><th>10</th><th>16</th><th>25</th><th>35</th><th>50</th><th>63</th><th>100</th><th>160 to 250</th><th>315 to 450</th> </tr> </thead> <tbody> <tr> <td rowspan="2">Impedance ratio (max.)</td> <td>Z-25°C/Z+20°C</td> <td>5</td><td>4</td><td>3</td><td>2</td><td>2</td><td>2</td><td>2</td><td>4</td><td>4</td> </tr> <tr> <td>Z-40°C/Z+20°C</td> <td>10</td><td>8</td><td>6</td><td>4</td><td>3</td><td>3</td><td>3</td><td>15</td><td>10</td> </tr> </tbody> </table>																Rated voltage (V)	6.3	10	16	25	35	50	63	100	160 to 250	315 to 450	Impedance ratio (max.)	Z-25°C/Z+20°C	5	4	3	2	2	2	2	4	4	Z-40°C/Z+20°C	10	8	6	4	3	3	3	15	10
	Rated voltage (V)	6.3	10	16	25	35	50	63	100	160 to 250	315 to 450																																					
Impedance ratio (max.)	Z-25°C/Z+20°C	5	4	3	2	2	2	2	4	4																																						
	Z-40°C/Z+20°C	10	8	6	4	3	3	3	15	10																																						
(120Hz)																																																
Endurance (105°C) (Applied ripple current)	Test time		2000 hours (φ5 to φ8, 100V or less : 1000 hours)																																													
	Leakage current		The initial specified value or less																																													
	Percentage of capacitance change		Within ±20% of initial value																																													
	Tangent of the loss angle		200% or less of the initial specified value																																													
Shelf life (105°C)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1																																															
Applicable standards	JIS C5101 - 1, - 4 (IEC 60384 - 1, - 4)																																															

### Outline Drawing

Unit : mm

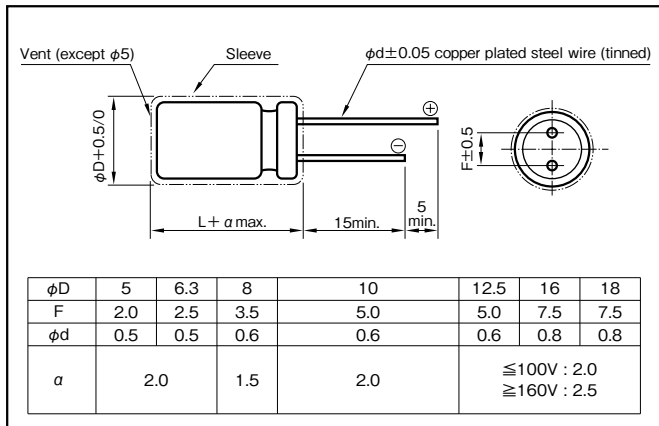

### Coefficient of Frequency for Rated Ripple Current

Rated voltage (V)	Frequency (Hz)	Rated capacitance (µF)				
		1 to 47	100 to 220	330 to 1000	2200 to 22000	1 to 470
6.3 to 100	50 · 60	0.8	1	1.5	1.7	2.0
	120	0.8	1	1.2	1.3	1.4
	1k	0.8	1	1.2	1.2	1.3
	10k	0.8	1	1.1	1.1	1.1
160 to 450	100k	0.8	1	1.3	1.4	1.6

Product code system : 10V1000µF (\*For general product)

RS*	RJ5	102	M	1L	F12		T
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Lead-forming and packing code	Additional code

- In the case of 160V or more, should added "B" to the additional symbol.
- For details, refer to the various "Product Code System" pages.

### Size code

Size φD×L (mm)	Size code	Size φD×L (mm)	Size code	Size φD×L (mm)	Size code	Size φD×L (mm)	Size code
5×11	C11	10×12.5	F12	16×20	J20	18×20	K20
6.3×11	D11	10×16	F16	16×25	J25	18×25	K25
8×11.5	E11	10×20	F20	16×31.5	J31	18×31.5	K31
—	—	12.5×20	G20	16×35.5	J35	18×35.5	K35
—	—	12.5×25	G25	—	—	18×40	K40

NOTE : Design, Specifications are subject to change without notice. It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

## Standard Ratings

Rated capacitance (μF)	6.3 (1J)		10 (1L)		16 (1E)		25 (1T)		35 (1G)		50 (1U)		63 (4E)		100 (1H)		
	Item	Case	Rated ripple current (mA <sub>RMS</sub> )	Case	Rated ripple current (mA <sub>RMS</sub> )	Case	Rated ripple current (mA <sub>RMS</sub> )	Case	Rated ripple current (mA <sub>RMS</sub> )	Case	Rated ripple current (mA <sub>RMS</sub> )	Case	Rated ripple current (mA <sub>RMS</sub> )	Case	Rated ripple current (mA <sub>RMS</sub> )	Case	Rated ripple current (mA <sub>RMS</sub> )
	φD×L (mm)	φD×L (mm)	φD×L (mm)	φD×L (mm)	φD×L (mm)	φD×L (mm)	φD×L (mm)	φD×L (mm)	φD×L (mm)	φD×L (mm)	φD×L (mm)	φD×L (mm)	φD×L (mm)	φD×L (mm)	φD×L (mm)	φD×L (mm)	φD×L (mm)
1	—	—	—	—	—	—	—	—	—	—	5×11	15	—	—	5×11	15	
2.2	—	—	—	—	—	—	—	—	—	—	5×11	22	—	—	5×11	21	
3.3	—	—	—	—	—	—	—	—	—	—	5×11	27	—	—	5×11	29	
4.7	—	—	—	—	—	—	—	—	—	—	5×11	32	—	—	5×11	32	
10	—	—	—	—	—	—	—	—	—	—	5×11	47	—	—	5×11	50	
22	—	—	—	—	—	—	—	—	—	—	5×11	70	5×11	71	6.3×11	93	
33	—	—	—	—	—	—	—	—	—	—	5×11	90	6.3×11	100	8×11.5	130	
47	—	—	—	—	—	—	—	—	5×11	93	6.3×11	115	6.3×11	120	8×11.5	140	
68	—	—	—	—	—	—	—	—	6.3×11	110	6.3×11	150	8×11.5	155	10×12.5	190	
100	—	—	—	—	—	—	5×11	125	6.3×11	151	8×11.5	190	8×11.5	200	10×16	240	
220	—	—	5×11	155	6.3×11	190	6.3×11	200	8×11.5	270	10×12.5	314	10×16	335	12.5×20	390	
330	—	—	6.3×11	210	6.3×11	225	8×11.5	310	10×12.5	384	10×16	421	10×20	510	—	—	
470	—	—	6.3×11	250	8×11.5	323	10×12.5	429	10×16	470	10×20	540	12.5×20	640	16×25	715	
1000	8×11.5	398	10×12.5	460	10×12.5	500	10×16	610	12.5×20	857	12.5×25	1000	16×25	930	18×35.5	960	
2200	10×16	635	10×16	705	10×20	710	12.5×25	1180	16×25	1380	16×31.5	1410	18×35.5	1650	—	—	
3300	10×20	882	12.5×20	1010	12.5×25	1200	16×25	1440	16×31.5	1500	18×35.5	1990	—	—	—	—	
4700	12.5×20	1120	12.5×25	1260	16×25	1500	16×25	1570	16×35.5	1780	—	—	—	—	—	—	
6800	12.5×25	1380	16×25	1570	16×25	1600	16×35.5	1850	18×40	2000	—	—	—	—	—	—	
10000	16×25	1750	16×31.5	1820	16×35.5	1930	18×40	2000	—	—	—	—	—	—	—	—	
15000	16×31.5	1820	16×35.5	2050	18×40	2210	—	—	—	—	—	—	—	—	—	—	
22000	18×35.5	2280	18×40	2420	—	—	—	—	—	—	—	—	—	—	—	—	

Rated capacitance (μF)	160 (2R)		200 (1K)		250 (1Q)		315 (9G)		350 (7U)		400 (4H)		450 (1N)		
	Item	Case	Rated ripple current (mA <sub>RMS</sub> )	Case	Rated ripple current (mA <sub>RMS</sub> )	Case	Rated ripple current (mA <sub>RMS</sub> )	Case	Rated ripple current (mA <sub>RMS</sub> )	Case	Rated ripple current (mA <sub>RMS</sub> )	Case	Rated ripple current (mA <sub>RMS</sub> )	Case	Rated ripple current (mA <sub>RMS</sub> )
	φD×L (mm)	φD×L (mm)	φD×L (mm)	φD×L (mm)	φD×L (mm)	φD×L (mm)	φD×L (mm)	φD×L (mm)	φD×L (mm)	φD×L (mm)	φD×L (mm)	φD×L (mm)	φD×L (mm)	φD×L (mm)	φD×L (mm)
1	—	—	—	—	—	—	—	—	—	—	—	—	6.3×11	12	
2.2	—	—	—	—	—	—	6.3×11	21	6.3×11	21	—	—	8×11.5	20	
3.3	—	—	—	—	6.3×11	35	6.3×11	26	6.3×11	26	—	—	10×12.5	41	
4.7	—	—	6.3×11	42	6.3×11	42	8×11.5	35	8×11.5	35	8×11.5	35	10×12.5	49	
10	6.3×11	61	8×11.5	72	8×11.5	72	10×16	74	10×16	67	10×16	67	10×20	86	
22	10×12.5	125	10×16	135	10×16	135	12.5×20	135	12.5×20	140	12.5×20	140	12.5×25	170	
33	10×16	170	10×20	185	12.5×20	210	12.5×25	195	12.5×25	195	12.5×25	195	16×20	225	
47	10×20	220	—	—	12.5×20	250	—	—	—	—	16×25	350	16×25	296	
68	12.5×25	330	12.5×20	305	16×20	355	18×20	350	16×31.5	390	16×31.5	460	16×31.5	390	
100	16×20	430	12.5×25	400	16×25	465	16×35.5	500	18×20	350	18×25	380	18×25	380	
120	16×25	510	16×20	430	18×20	465	18×25	460	16×35.5	500	18×31.5	505	18×35.5	540	
150	18×20	570	16×25	510	16×31.5	560	18×31.5	560	18×31.5	560	18×35.5	588	18×40	615	
180	18×25	675	16×25	510	16×31.5	560	18×31.5	560	18×31.5	560	18×35.5	588	18×40	615	
220	18×25	745	16×31.5	625	16×35.5	655	18×35.5	648	18×35.5	648	18×40	688	—	—	
330	—	—	18×25	615	18×25	615	—	—	18×40	688	—	—	—	—	
470	18×25	675	16×35.5	790	18×31.5	735	18×40	750	—	—	—	—	—	—	
220	18×25	745	18×25	675	18×31.5	735	18×40	750	—	—	—	—	—	—	
330	—	—	16×35.5	790	18×35.5	855	—	—	—	—	—	—	—	—	
470	18×40	1300	18×31.5	810	—	—	—	—	—	—	—	—	—	—	



(Note) Rated ripple current : 105° C, 120Hz ; ESR. : 20° C, 120Hz

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

### 105°C Miniature Capacitors

GREEN CAP 105°C 2000hours Anti-cleaning solvent 250V Max.

- Case size is one rank smaller than Series RJ3.
- Guarantees 2000 hours at 105°C. (φ5 to φ8 : 1000 hours)

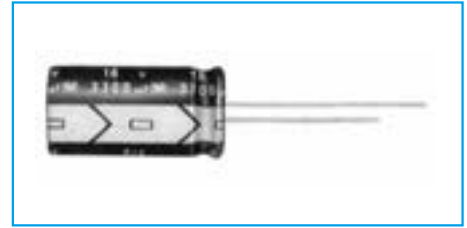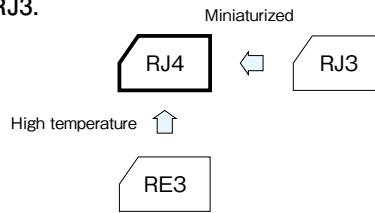


Marking color : White print on a black sleeve

### Specifications

Item	Performance																																	
Category temperature range (°C)	-55 to +105	-40 to +105																																
Rated voltage (V)	6.3 to 100	160 to 450																																
Tolerance at rated capacitance (%)	±20 (20°C, 120Hz)																																	
Leakage current (μA) (max.)	0.03CV or 4 whichever is larger (after 1 minute) 0.01CV or 3 whichever is larger (after 2 minutes)	CV ≤ 1000 : 0.1CV+40 (after 1 minute) CV > 1000 : 0.04CV+100 (after 1 minute)																																
C : Rated capacitance (μF) ; V : Rated voltage (V) (20°C)																																		
Tangent of loss angle (tanδ)	<table border="1"> <thead> <tr> <th>Rated voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>100</th> <th>160</th> <th>200</th> <th>250</th> <th>315</th> <th>350</th> <th>400</th> <th>450</th> </tr> </thead> <tbody> <tr> <td>tan δ (max.)</td> <td>0.28</td> <td>0.24</td> <td>0.20</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> <td>0.08</td> <td>0.20</td> <td>0.20</td> <td>0.20</td> <td>0.24</td> <td>0.24</td> <td>0.24</td> <td>0.24</td> </tr> </tbody> </table> <p>0.02 is added to every 1000μF increase over 1000μF. (20°C, 120Hz)</p>		Rated voltage (V)	6.3	10	16	25	35	50	63	100	160	200	250	315	350	400	450	tan δ (max.)	0.28	0.24	0.20	0.16	0.14	0.12	0.10	0.08	0.20	0.20	0.20	0.24	0.24	0.24	0.24
Rated voltage (V)	6.3	10	16	25	35	50	63	100	160	200	250	315	350	400	450																			
tan δ (max.)	0.28	0.24	0.20	0.16	0.14	0.12	0.10	0.08	0.20	0.20	0.20	0.24	0.24	0.24	0.24																			
Characteristics at high and low temperature	<table border="1"> <thead> <tr> <th>Rated voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>100</th> <th>160 to 250</th> <th>315 to 450</th> </tr> </thead> <tbody> <tr> <td rowspan="2">Impedance ratio (max.)</td> <td>Z-25°C/Z+20°C</td> <td>5</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>4</td> <td>4</td> </tr> <tr> <td>Z-40°C/Z+20°C</td> <td>10</td> <td>8</td> <td>6</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> <td>15</td> <td>10</td> </tr> </tbody> </table> <p>(120Hz)</p>		Rated voltage (V)	6.3	10	16	25	35	50	63	100	160 to 250	315 to 450	Impedance ratio (max.)	Z-25°C/Z+20°C	5	4	3	2	2	2	2	4	4	Z-40°C/Z+20°C	10	8	6	4	3	3	3	15	10
Rated voltage (V)	6.3	10	16	25	35	50	63	100	160 to 250	315 to 450																								
Impedance ratio (max.)	Z-25°C/Z+20°C	5	4	3	2	2	2	2	4	4																								
	Z-40°C/Z+20°C	10	8	6	4	3	3	3	15	10																								
Endurance (105°C) (Applied ripple current)	<table border="1"> <thead> <tr> <th>Test time</th> <th>2000 hours (φ5 to φ8 : 1000 hours)</th> </tr> </thead> <tbody> <tr> <td>Leakage current</td> <td>The initial specified value or less</td> </tr> <tr> <td>Percentage of capacitance change</td> <td>Within ±20% of initial value</td> </tr> <tr> <td>Tangent of the loss angle</td> <td>200% or less of the initial specified value</td> </tr> </tbody> </table>		Test time	2000 hours (φ5 to φ8 : 1000 hours)	Leakage current	The initial specified value or less	Percentage of capacitance change	Within ±20% of initial value	Tangent of the loss angle	200% or less of the initial specified value																								
Test time	2000 hours (φ5 to φ8 : 1000 hours)																																	
Leakage current	The initial specified value or less																																	
Percentage of capacitance change	Within ±20% of initial value																																	
Tangent of the loss angle	200% or less of the initial specified value																																	
Shelf life (105°C)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1																																	
Applicable standards	JIS C5101 - 1, - 4 (IEC 60384 - 1, - 4)																																	

### Outline Drawing

Unit : mm

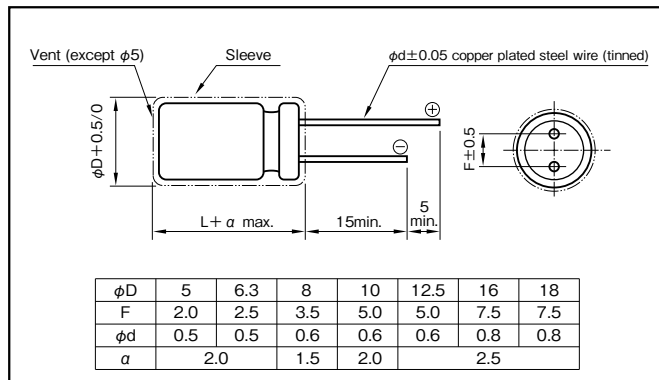

### Coefficient of Frequency for Rated Ripple Current

Rated voltage (V)	Frequency (Hz) Rated capacitance (μF)	Frequency (Hz)				
		50 · 60	120	1k	10k	100k
6.3 to 100	1 to 47	0.8	1	1.5	1.7	2.0
	100 to 220	0.8	1	1.2	1.3	1.4
	330 to 1000	0.8	1	1.2	1.2	1.3
	2200 to 22000	0.8	1	1.1	1.1	1.1
160 to 450	1 to 330	0.8	1	1.3	1.4	1.6

Product code system : 16V2200μF (\*For general product)

RS*	RJ4	222	M	1E	G20		T
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Lead-forming and packing code	Additional code

For details, refer to the various "Product Code System" pages.

### Size code

Size φD×L (mm)	Size code	Size φD×L (mm)	Size code
5×11	C11	12.5×25	G25
6.3×11	D11	16×25	J25
8×11.5	E11	16×31.5	J31
10×12.5	F12	16×35.5	J35
10×16	F16	18×31.5	K31
10×20	F20	18×35.5	K35
12.5×20	G20	18×40	K40

NOTE : Design, Specifications are subject to change without notice. It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

## Standard Ratings

Rated voltage (V)	Item	6.3 (1J)			10 (1L)			16 (1E)			25 (1T)			35 (1G)			50 (1U)			63 (4E)			100 (1H)		
		Case $\phi$ D×L (mm)	ESR ( $\Omega$ )	Rated ripple current (mA <sub>rms</sub> )	Case $\phi$ D×L (mm)	ESR ( $\Omega$ )	Rated ripple current (mA <sub>rms</sub> )	Case $\phi$ D×L (mm)	ESR ( $\Omega$ )	Rated ripple current (mA <sub>rms</sub> )	Case $\phi$ D×L (mm)	ESR ( $\Omega$ )	Rated ripple current (mA <sub>rms</sub> )	Case $\phi$ D×L (mm)	ESR ( $\Omega$ )	Rated ripple current (mA <sub>rms</sub> )	Case $\phi$ D×L (mm)	ESR ( $\Omega$ )	Rated ripple current (mA <sub>rms</sub> )	Case $\phi$ D×L (mm)	ESR ( $\Omega$ )	Rated ripple current (mA <sub>rms</sub> )	Case $\phi$ D×L (mm)	ESR ( $\Omega$ )	Rated ripple current (mA <sub>rms</sub> )
1	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	5×11	199	15	—	—	—	5×11	133	15	
2.2	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	5×11	90.5	22	—	—	—	5×11	60.3	21	
3.3	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	5×11	60.3	27	—	—	—	5×11	40.2	29	
4.7	—	—	—	—	—	—	—	—	5×11	56.5	27	5×11	49.4	30	5×11	42.4	32	—	—	—	5×11	28.2	32		
10	—	—	—	—	—	—	5×11	33.2	37	5×11	26.5	39	5×11	23.2	43	5×11	19.9	47	5×11	16.6	46	6.3×11	13.3	54	
22	—	—	—	—	—	—	5×11	15.1	54	5×11	12.1	58	5×11	10.6	64	5×11	9.05	70	5×11	7.54	71	6.3×11	6.03	93	
33	—	—	—	—	—	—	5×11	10.1	67	5×11	8.04	71	5×11	7.04	78	5×11	6.03	90	6.3×11	5.03	100	8×11.5	4.02	130	
47	—	—	—	5×11	8.47	72	5×11	7.06	79	5×11	5.65	84	5×11	4.94	90	6.3×11	4.24	115	6.3×11	3.53	120	10×12.5	2.82	165	
100	—	—	—	5×11	3.98	105	5×11	3.32	115	6.3×11	2.65	141	6.3×11	2.32	151	8×11.5	1.99	190	10×12.5	1.66	215	10×20	1.33	265	
220	5×11	2.11	140	6.3×11	1.81	166	6.3×11	1.51	190	8×11.5	1.21	247	10×12.5	1.06	314	10×12.5	0.91	314	10×16	0.75	335	12.5×25	0.60	440	
330	6.3×11	1.41	195	6.3×11	1.21	210	8×11.5	1.01	271	10×12.5	0.81	360	10×12.5	0.70	384	10×16	0.60	421	10×20	0.50	510	12.5×25	0.40	540	
470	6.3×11	0.99	232	8×11.5	0.85	325	8×11.5	0.71	323	10×12.5	0.57	429	10×16	0.50	470	12.5×20	0.42	628	12.5×20	0.35	640	16×25	0.28	715	
1000	8×11.5	0.47	398	10×12.5	0.40	457	10×16	0.33	560	10×20	0.27	705	12.5×20	0.23	857	12.5×25	0.20	1000	16×25	0.17	930	18×40	0.13	985	
2200	10×20	0.23	720	10×20	0.20	761	12.5×20	0.17	961	12.5×25	0.14	1180	16×25	0.12	1380	16×35.5	0.11	1660	—	—	—	—	—	—	
3300	10×20	0.16	882	12.5×20	0.14	1010	12.5×25	0.12	1200	16×25	0.10	1440	16×35.5	0.09	1780	18×35.5	0.08	1990	—	—	—	—	—	—	
4700	12.5×20	0.12	1120	12.5×25	0.11	1250	16×25	0.09	1490	16×31.5	0.08	1880	18×35.5	0.07	2120	—	—	—	—	—	—	—	—	—	
6800	12.5×25	0.09	1380	16×25	0.08	1570	16×35.5	0.07	1830	18×35.5	0.06	2330	—	—	—	—	—	—	—	—	—	—	—	—	
10000	16×25	0.08	1750	16×35.5	0.07	1910	18×35.5	0.06	2220	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
15000	16×35.5	0.06	2040	18×35.5	0.06	2190	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
22000	18×40	0.05	2390	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	

Rated voltage (V)	Item	160 (2R)			200 (1K)			250 (1Q)			315 (9G)			350 (7U)			400 (4H)			450 (1N)			
		Case $\phi$ D×L (mm)	ESR ( $\Omega$ )	Rated ripple current (mA <sub>rms</sub> )	Case $\phi$ D×L (mm)	ESR ( $\Omega$ )	Rated ripple current (mA <sub>rms</sub> )	Case $\phi$ D×L (mm)	ESR ( $\Omega$ )	Rated ripple current (mA <sub>rms</sub> )	Case $\phi$ D×L (mm)	ESR ( $\Omega$ )	Rated ripple current (mA <sub>rms</sub> )	Case $\phi$ D×L (mm)	ESR ( $\Omega$ )	Rated ripple current (mA <sub>rms</sub> )	Case $\phi$ D×L (mm)	ESR ( $\Omega$ )	Rated ripple current (mA <sub>rms</sub> )	Case $\phi$ D×L (mm)	ESR ( $\Omega$ )	Rated ripple current (mA <sub>rms</sub> )	
1	6.3×11	332	16	6.3×11	332	16	6.3×11	332	16	6.3×11	398	16	6.3×11	398	16	6.3×11	398	16	8×11.5	398	18		
2.2	6.3×11	151	23	6.3×11	151	23	6.3×11	151	23	8×11.5	181	27	8×11.5	181	27	8×11.5	181	27	10×12.5	181	31		
3.3	6.3×11	101	28	6.3×11	101	28	8×11.5	101	34	10×12.5	121	38	10×12.5	121	38	10×12.5	121	38	10×16	121	42		
4.7	6.3×11	70.6	34	8×11.5	70.6	40	8×11.5	70.6	40	10×12.5	84.7	45	10×12.5	84.7	45	10×16	84.7	50	10×20	84.7	54		
10	8×11.5	33.2	58	10×12.5	33.2	66	10×16	33.2	74	10×20	39.8	79	10×20	39.8	79	12.5×20	39.8	87	12.5×20	39.8	87		
22	10×16	15.1	107	10×20	15.1	120	12.5×20	15.1	130	12.5×20	18.1	129	12.5×25	18.1	140	12.5×25	18.1	140	16×25	18.1	160		
33	10×20	10.1	143	12.5×20	10.1	160	12.5×25	10.1	172	16×25	12.1	196	16×25	12.1	196	16×25	12.1	196	16×31.5	12.1	215		
47	12.5×20	7.06	188	12.5×20	7.06	188	12.5×25	7.06	205	16×25	8.47	234	16×25	8.47	234	16×31.5	8.47	256	16×35.5	8.47	269		
100	12.5×25	3.32	299	16×25	3.32	342	16×31.5	3.32	374	18×31.5	3.98	401	18×31.5	3.98	401	—	—	—	—	—	—	—	—
220	16×31.5	1.51	554	18×35.5	1.51	624	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
330	18×35.5	1.01	764	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

(Note) Rated ripple current : 105°C, 120Hz ; ESR. : 20°C, 120Hz





### 105°C Use, Standard Capacitors

GREEN CAP

105°C  
2000hours

Anti-cleaning solvent  
250V Max.

• Guarantees 2000 hours at 105°C (φ5 to φ8 : 1000 hours).

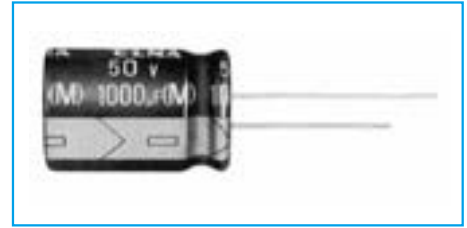


Marking color : White print on a black sleeve

### Specifications

Item	Performance																															
Category temperature range (°C)	-55 to +105	-40 to +105																														
Rated voltage (V)	6.3 to 100	160 to 400																														
Tolerance at rated capacitance (%)	±20 (20°C, 120Hz)																															
Leakage current (μA) (max.)	0.03CV or 4 whichever is larger (after 1 minute) 0.01CV or 3 whichever is larger (after 2 minutes)	CV ≤ 1000 : 0.1CV+40 (after 1 minute) CV > 1000 : 0.04CV+100 (after 1 minute)																														
Tangent of loss angle (tanδ)	C : Rated capacitance (μF) ; V : Rated voltage (V) (20°C)																															
Characteristics at high and low temperature	<table border="1"> <thead> <tr> <th>Rated voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>100</th> <th>160</th> <th>200</th> <th>250</th> <th>315</th> <th>350</th> <th>400</th> </tr> </thead> <tbody> <tr> <td>tan δ (max.)</td> <td>0.22</td> <td>0.19</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> <td>0.09</td> <td>0.08</td> <td>0.15</td> <td>0.15</td> <td>0.15</td> <td>0.20</td> <td>0.20</td> <td>0.20</td> </tr> </tbody> </table>		Rated voltage (V)	6.3	10	16	25	35	50	63	100	160	200	250	315	350	400	tan δ (max.)	0.22	0.19	0.16	0.14	0.12	0.10	0.09	0.08	0.15	0.15	0.15	0.20	0.20	0.20
	Rated voltage (V)	6.3	10	16	25	35	50	63	100	160	200	250	315	350	400																	
tan δ (max.)	0.22	0.19	0.16	0.14	0.12	0.10	0.09	0.08	0.15	0.15	0.15	0.20	0.20	0.20																		
0.02 is added to every 1000μF increase over 1000μF. (20°C, 120Hz)																																
Endurance (105°C) (Applied ripple current)	Test time	2000 hours (φ5 to φ8 : 1000 hours)																														
	Leakage current	The initial specified value or less																														
	Percentage of capacitance change	Within ±20% of initial value																														
Shelf life (105°C)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1																															
	Applicable standards : JIS C5101 - 1, - 4 (IEC 60384 - 1, - 4)																															

### Outline Drawing

Unit : mm

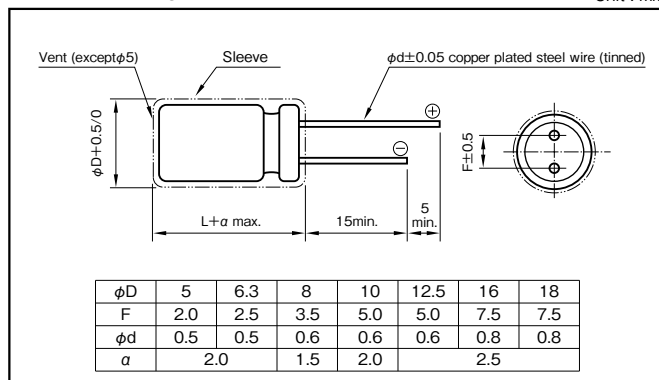

### Coefficient of Frequency for Rated Ripple Current

Rated voltage (V)	Rated capacitance (μF)	Frequency (Hz)				
		50 · 60	120	1k	10k	100k
6.3 to 100	1 to 4.7	—	0.4	0.7	0.8	1
	10 to 47	—	0.5	0.8	0.9	1
	100 to 220	—	0.7	0.9	0.9	1
	330 to 1000	—	0.8	0.9	1.0	1
	2200 to 15000	—	0.9	1.0	1.0	1
160 to 400	1 to 220	0.8	1	1.3	1.4	1.6

Product code system : 63V1000μF (\*For general product)

RS*	RJ3	102	M	4E	J31		T
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Lead-forming and packing code	Additional code

For details, refer to the various "Product Code System" pages.

### Size code

Size φD×L (mm)	Size code	Size φD×L (mm)	Size code
5×11	C11	12.5×25	G25
6.3×11	D11	16×25	J25
8×11.5	E11	16×31.5	J31
10×12.5	F12	16×35.5	K31
10×16	F16	18×35.5	K35
10×20	F20	18×40	K40
12.5×20	G20		

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

## Standard Ratings

Rated voltage (V)	Item	6.3 (1J)				10 (1L)				16 (1E)				25 (1T)			
		Case φD×L (mm)	ESR (Ω)	Impedance (Ω max.)	Rated ripple current (mAmps)	Case φD×L (mm)	ESR (Ω)	Impedance (Ω max.)	Rated ripple current (mAmps)	Case φD×L (mm)	ESR (Ω)	Impedance (Ω max.)	Rated ripple current (mAmps)	Case φD×L (mm)	ESR (Ω)	Impedance (Ω max.)	Rated ripple current (mAmps)
4.7	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
10	—	—	—	—	—	—	—	—	—	5×11	26.5	2.5	92	5×11	23.2	2.5	92
22	—	—	—	—	5×11	14.3	2.5	92	5×11	12.1	1.9	105	5×11	10.6	1.9	105	
33	5×11	11.1	2.5	105	5×11	9.55	1.9	105	5×11	8.04	1.5	120	5×11	7.04	1.5	120	
47	5×11	7.77	1.5	120	5×11	6.71	1.5	120	5×11	5.65	1.2	130	5×11	4.94	1.2	130	
100	5×11	3.65	1.2	130	5×11	3.15	1.2	130	6.3×11	2.65	0.58	220	6.3×11	2.32	0.58	220	
220	6.3×11	1.66	0.87	180	6.3×11	1.43	0.58	220	8×11.5	1.21	0.47	290	8×11.5	1.06	0.39	315	
330	6.3×11	1.11	0.58	220	8×11.5	0.96	0.47	265	8×11.5	0.81	0.39	315	10×12.5	0.70	0.23	500	
470	8×11.5	0.78	0.39	315	8×11.5	0.67	0.39	315	10×12.5	0.57	0.23	500	10×16	0.50	0.18	615	
1000	10×12.5	0.37	0.23	500	10×16	0.32	0.18	615	10×20	0.27	0.12	825	12.5×20	0.23	0.090	1050	
2200	12.5×20	0.18	0.095	1000	12.5×20	0.16	0.090	1050	12.5×25	0.14	0.068	1300	16×25	0.12	0.056	1740	
3300	12.5×20	0.13	0.090	1050	12.5×25	0.12	0.068	1300	16×25	0.10	0.056	1740	16×31.5	0.09	0.045	2110	
4700	16×25	0.10	0.061	1670	16×25	0.09	0.056	1740	16×31.5	0.08	0.045	2110	18×35.5	0.07	0.036	2580	
6800	16×25	0.08	0.056	1740	16×31.5	0.07	0.045	2110	18×35.5	0.06	0.036	2580	—	—	—	—	
10000	16×31.5	0.06	0.045	2110	18×35.5	0.06	0.036	2580	—	—	—	—	—	—	—	—	
15000	18×35.5	0.05	0.036	2580	—	—	—	—	—	—	—	—	—	—	—	—	

Rated voltage (V)	Item	35 (1G)				50 (1U)				63 (4E)				100 (1H)			
		Case φD×L (mm)	ESR (Ω)	Impedance (Ω max.)	Rated ripple current (mAmps)	Case φD×L (mm)	ESR (Ω)	Impedance (Ω max.)	Rated ripple current (mAmps)	Case φD×L (mm)	ESR (Ω)	Impedance (Ω max.)	Rated ripple current (mAmps)	Case φD×L (mm)	ESR (Ω)	Impedance (Ω max.)	Rated ripple current (mAmps)
1	—	—	—	—	5×11	166	4.9	35	—	—	—	—	5×11	133	11	45	
2.2	—	—	—	—	5×11	75.4	4.2	53	—	—	—	—	5×11	60.3	9.2	60	
3.3	—	—	—	—	5×11	50.3	3.9	65	—	—	—	—	5×11	40.2	7.2	67	
4.7	5×11	42.4	2.5	92	5×11	35.3	3.6	82	5×11	31.8	5.8	74	5×11	28.2	6.3	75	
10	5×11	19.9	1.9	105	5×11	16.6	2.7	100	5×11	14.9	3.6	95	6.3×11	13.3	3.3	110	
22	5×11	9.05	1.5	120	5×11	7.54	1.9	125	6.3×11	6.79	2.1	130	8×11.5	6.03	1.4	165	
33	5×11	6.03	1.2	130	6.3×11	5.03	1.1	195	6.3×11	4.52	1.7	160	10×12.5	4.02	0.94	305	
47	6.3×11	4.24	0.58	220	6.3×11	3.53	0.90	245	8×11.5	3.18	1.2	305	10×16	2.82	0.68	320	
100	8×11.5	1.99	0.39	315	8×11.5	1.66	0.50	385	10×12.5	1.49	0.65	395	12.5×20	1.33	0.28	585	
220	10×12.5	0.91	0.23	500	10×16	0.75	0.27	505	10×20	0.68	0.32	505	16×25	0.60	0.16	1120	
330	10×16	0.60	0.18	615	10×20	0.50	0.18	675	12.5×20	0.45	0.22	660	16×25	0.40	0.13	1290	
470	10×20	0.42	0.12	825	12.5×20	0.35	0.12	895	12.5×25	0.32	0.16	850	16×31.5	0.28	0.11	1350	
1000	12.5×25	0.20	0.068	1300	16×25	0.17	0.076	1495	16×31.5	0.15	0.098	1430	—	—	—	—	
2200	16×31.5	0.11	0.045	2110	18×35.5	0.09	0.050	2190	—	—	—	—	—	—	—	—	
3300	18×35.5	0.08	0.036	2580	—	—	—	—	—	—	—	—	—	—	—	—	

(Note) Rated ripple current : 105°C, 100kHz ; ESR : 20°C, 120Hz ; Impedance : 20°C, 100kHz

Rated voltage (V)	Item	160 (2R)			200 (1K)			250 (1Q)			315 (9G)			350 (7U)			400 (4H)		
		Case φD×L (mm)	ESR (Ω)	Rated ripple current (mAmps)	Case φD×L (mm)	ESR (Ω)	Rated ripple current (mAmps)	Case φD×L (mm)	ESR (Ω)	Rated ripple current (mAmps)	Case φD×L (mm)	ESR (Ω)	Rated ripple current (mAmps)	Case φD×L (mm)	ESR (Ω)	Rated ripple current (mAmps)	Case φD×L (mm)	ESR (Ω)	Rated ripple current (mAmps)
1	6.3×11	248	18	6.3×11	248	18	6.3×11	248	18	6.3×11	331	16	6.3×11	331	18	8×11.5	331	18	
2.2	6.3×11	113	26	6.3×11	113	26	8×11.5	113	30	8×11.5	150	27	8×11.5	150	30	10×12.5	150	30	
3.3	8×11.5	75.4	37	8×11.5	75.4	37	10×12.5	75.4	43	10×12.5	100	36	10×12.5	100	36	10×16	100	40	
4.7	8×11.5	52.9	44	10×12.5	52.9	50	10×12.5	52.9	50	10×16	70.6	47	10×16	70.6	47	10×20	70.6	52	
10	10×12.5	24.9	75	10×16	24.9	80	10×20	24.9	90	10×20	33.2	75	12.5×20	33.2	79	12.5×20	33.2	79	
22	10×20	11.3	135	10×20	11.3	135	12.5×25	11.3	155	12.5×25	15.1	130	12.5×25	15.1	130	16×25	15.1	130	
33	12.5×20	7.54	175	12.5×25	7.54	190	12.5×25	7.54	190	16×25	10.1	160	16×25	10.1	160	16×31.5	10.1	175	
47	12.5×25	5.29	230	12.5×25	5.29	230	16×25	5.29	225	16×31.5	7.06	210	16×31.5	7.06	210	18×35.5	7.06	220	
100	16×25	2.49	330	16×31.5	2.49	360	18×35.5	2.49	340	18×40	3.32	335	18×40	3.32	335	—	—	—	
220	18×35.5	1.13	500	18×40	1.13	525	—	—	—	—	—	—	—	—	—	—	—	—	

(Note) Rated ripple current : 105°C, 120Hz ; ESR : 20°C, 120Hz

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

## 105°C Use, Miniature, High-Reliability, Low Impedance Capacitors



GREEN CAP

Low Impedance

105°C 5000hours

Anti-cleaning solvent

- Smaller and higher ripple current than RJB Series.
- Guarantees 5000 hours at 105°C.  
( $\phi 5$  to  $\phi 6.3$  : 2000 hours ;  $\phi 8$  to  $\phi 10$  : 3000 hours)

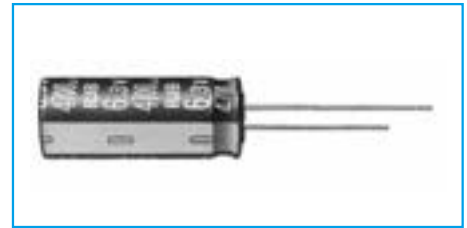


Marking color : White print on a black sleeve

### Specifications

Item	Performance																		
Category temperature range (°C)	-55 to +105																		
Tolerance at rated capacitance (%)	±20 (20°C, 120Hz)																		
Leakage current (µA) (max.)	0.01CV + 1 (after 2 minutes) C : Rated capacitance (µF) ; V : Rated voltage (V) (20°C)																		
Tangent of loss angle (tanδ)	<table border="1"> <thead> <tr> <th>Rated voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>100</th> </tr> </thead> <tbody> <tr> <td>tanδ (max.)</td> <td>0.22</td> <td>0.19</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> <td>0.09</td> <td>0.08</td> </tr> </tbody> </table> <p>0.02 is added to every 1000µF increase over 1000µF. (20°C, 120Hz)</p>	Rated voltage (V)	6.3	10	16	25	35	50	63	100	tanδ (max.)	0.22	0.19	0.16	0.14	0.12	0.10	0.09	0.08
Rated voltage (V)	6.3	10	16	25	35	50	63	100											
tanδ (max.)	0.22	0.19	0.16	0.14	0.12	0.10	0.09	0.08											
Characteristics at high and low temperature	<table border="1"> <thead> <tr> <th>Rated voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>100</th> </tr> </thead> <tbody> <tr> <td>Impedance ratio (max.)</td> <td>Z-55°C/Z+20°C</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> </tr> </tbody> </table> <p>(120Hz)</p>	Rated voltage (V)	6.3	10	16	25	35	50	63	100	Impedance ratio (max.)	Z-55°C/Z+20°C	3	3	3	3	3	3	3
Rated voltage (V)	6.3	10	16	25	35	50	63	100											
Impedance ratio (max.)	Z-55°C/Z+20°C	3	3	3	3	3	3	3											
Endurance (105°C) (Applied ripple current)	<table border="1"> <tbody> <tr> <td>Test time</td> <td>5000 hours (<math>\phi 5</math> to <math>\phi 6.3</math> : 2000 hours) (<math>\phi 8</math> to <math>\phi 10</math> : 3000 hours)</td> </tr> <tr> <td>Leakage current</td> <td>The initial specified value or less</td> </tr> <tr> <td>Percentage of capacitance change</td> <td>Within ±20% of initial value</td> </tr> <tr> <td>Tangent of the loss angle</td> <td>200% or less of the initial specified value</td> </tr> </tbody> </table>	Test time	5000 hours ( $\phi 5$ to $\phi 6.3$ : 2000 hours) ( $\phi 8$ to $\phi 10$ : 3000 hours)	Leakage current	The initial specified value or less	Percentage of capacitance change	Within ±20% of initial value	Tangent of the loss angle	200% or less of the initial specified value										
Test time	5000 hours ( $\phi 5$ to $\phi 6.3$ : 2000 hours) ( $\phi 8$ to $\phi 10$ : 3000 hours)																		
Leakage current	The initial specified value or less																		
Percentage of capacitance change	Within ±20% of initial value																		
Tangent of the loss angle	200% or less of the initial specified value																		
Shelf life (105°C)	<table border="1"> <tbody> <tr> <td>Test time</td> <td>1000 hours</td> </tr> <tr> <td>Leakage current</td> <td>The initial specified value or less</td> </tr> <tr> <td>Percentage of capacitance change</td> <td>Within ±15% of initial value</td> </tr> <tr> <td>Tangent of the loss angle</td> <td>150% or less of the initial specified value</td> </tr> </tbody> </table> <p>Voltage application treatment : According to JIS C5101-4 4.1</p>	Test time	1000 hours	Leakage current	The initial specified value or less	Percentage of capacitance change	Within ±15% of initial value	Tangent of the loss angle	150% or less of the initial specified value										
Test time	1000 hours																		
Leakage current	The initial specified value or less																		
Percentage of capacitance change	Within ±15% of initial value																		
Tangent of the loss angle	150% or less of the initial specified value																		
Applicable standards	JIS C5101 - 1, - 4 (IEC 60384 - 1, - 4)																		

### Outline Drawing

Unit : mm

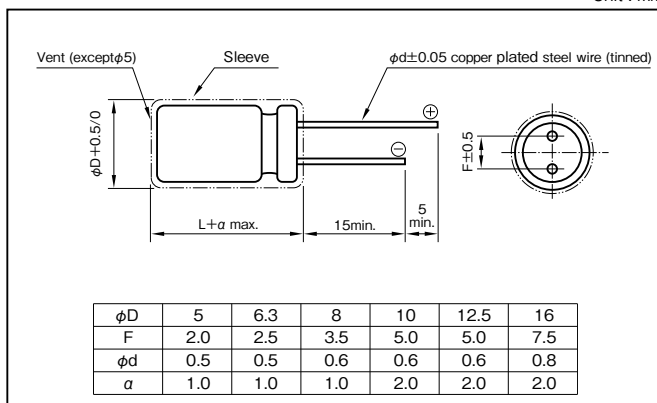

### Coefficient of Frequency for Rated Ripple Current

Rated capacitance (µF) \ Frequency (Hz)	120	1k	10k	100k
3.3 to 180	0.40	0.75	0.90	1
220 to 390	0.50	0.85	0.95	1
470 to 1800	0.60	0.88	0.96	1
2200 to 3900	0.75	0.90	0.98	1
4700 to 10000	0.85	0.95	1.00	1

Product code system : 10V1000µF (\*For general product)

RS*	RJB	102	M	1L	F16		T
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Lead-forming and packing code	Additional code

For details, refer to the various "Product Code System" pages.

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

## Standard Ratings

Rated voltage (V)	Item	6.3 (1J)					10 (1L)					16 (1E)				
		Case φD×L (mm)	Size code	Impedance (Ω max.)		Rated ripple current (mAmps)	Case φD×L (mm)	Size code	Impedance (Ω max.)		Rated ripple current (mAmps)	Case φD×L (mm)	Size code	Impedance (Ω max.)		Rated ripple current (mAmps)
				20°C	-10°C				20°C	-10°C				20°C	-10°C	
100	—	—	—	—	—	5×11.5	C11	0.65	1.3	181	—	—	—	—	—	
220	—	—	—	—	—	6.3×11.5	D11	0.32	0.64	290	—	—	—	—	—	
330	6.3×11.5	D11	0.32	0.64	290	8×12	E12	0.17	0.34	555	8×12	E12	0.17	0.34	555	
470	8×12	E12	0.17	0.34	555	8×12	E12	0.17	0.34	555	10×12.5	F12	0.12	0.24	760	
680	8×12	E12	0.17	0.34	555	10×12.5	F12	0.12	0.24	760	10×16	F16	0.080	0.16	1050	
1000	10×12.5	F12	0.12	0.24	760	10×16	F16	0.080	0.16	1050	10×20	F20	0.062	0.124	1220	
2200	10×25	F25	0.052	0.104	1440	12.5×20	G20	0.042	0.084	1690	12.5×25	G25	0.034	0.068	1950	
3300	12.5×20	G20	0.042	0.084	1690	12.5×25	G25	0.034	0.068	1950	16×25	J25	0.028	0.056	2560	
4700	12.5×30	G30	0.030	0.060	2310	16×25	J25	0.028	0.056	2560	16×31.5	J31	0.025	0.050	3010	
6800	16×25	J25	0.028	0.056	2560	16×31.5	J31	0.025	0.050	3010	—	—	—	—	—	
10000	16×31.5	J31	0.025	0.050	3010	—	—	—	—	—	—	—	—	—	—	

Rated voltage (V)	Item	25 (1T)					35 (1G)					50 (1U)				
		Case φD×L (mm)	Size code	Impedance (Ω max.)		Rated ripple current (mAmps)	Case φD×L (mm)	Size code	Impedance (Ω max.)		Rated ripple current (mAmps)	Case φD×L (mm)	Size code	Impedance (Ω max.)		Rated ripple current (mAmps)
				20°C	-10°C				20°C	-10°C				20°C	-10°C	
22	—	—	—	—	—	—	—	—	—	—	5×11.5	C11	0.95	1.9	170	
33	—	—	—	—	—	5×11.5	C11	0.65	1.3	181	6.3×11.5	D11	0.46	0.92	260	
47	5×11.5	C11	0.65	1.3	181	6.3×11.5	D11	0.32	0.64	290	6.3×11.5	D11	0.46	0.92	260	
100	6.3×11.5	D11	0.32	0.64	290	8×12	E12	0.17	0.34	555	8×12	E12	0.21	0.42	485	
150	—	—	—	—	—	—	—	—	—	—	10×12.5	F12	0.19	0.38	615	
220	8×12	E12	0.17	0.34	555	10×12.5	F12	0.12	0.24	760	10×16	F16	0.16	0.32	850	
330	10×12.5	F12	0.12	0.24	760	10×16	F16	0.080	0.16	1050	10×20	F20	0.085	0.17	1050	
470	10×16	F16	0.080	0.16	1050	10×20	F20	0.062	0.124	1220	12.5×20	G20	0.060	0.12	1500	
680	10×20	F20	0.062	0.124	1220	12.5×20	G20	0.042	0.084	1690	12.5×25	G25	0.045	0.090	1832	
1000	12.5×20	G20	0.042	0.084	1690	12.5×25	G25	0.034	0.068	1950	16×25	J25	0.038	0.076	2240	
2200	16×25	J25	0.028	0.056	2560	16×31.5	J31	0.025	0.050	3010	—	—	—	—	—	
3300	16×31.5	J31	0.025	0.050	3010	—	—	—	—	—	—	—	—	—	—	



Rated voltage (V)	Item	63 (4E)					100 (1H)				
		Case φD×L (mm)	Size code	Impedance (Ω max.)		Rated ripple current (mAmps)	Case φD×L (mm)	Size code	Impedance (Ω max.)		Rated ripple current (mAmps)
				20°C	-10°C				20°C	-10°C	
3.3	—	—	—	—	—	5×11.5	C11	1.9	7.6	57	
4.7	5×11.5	C11	1.2	3.6	120	5×11.5	C11	1.9	7.6	57	
10	5×11.5	C11	1.2	3.6	120	6.3×11.5	D11	1.1	4.4	78	
22	6.3×11.5	D11	0.55	1.7	148	8×12	E12	0.53	2.1	275	
33	6.3×11.5	D11	0.55	1.7	148	10×12.5	F12	0.47	1.9	319	
47	8×12	E12	0.32	0.96	360	10×16	F16	0.32	1.3	424	
100	10×12.5	F12	0.23	0.69	448	12.5×20	G20	0.13	0.52	805	
220	10×20	F20	0.12	0.36	676	16×25	J25	0.081	0.32	1290	
330	12.5×20	G20	0.075	0.23	979	16×25	J25	0.081	0.32	1290	
470	12.5×25	G25	0.065	0.20	1180	16×31.5	J31	0.059	0.23	1630	
1000	16×31.5	J31	0.042	0.13	1890	—	—	—	—	—	

(Note) Rated ripple current : 105°C, 100kHz ; Impedance : 100kHz

## 105°C Use, High-Reliability, Low Impedance Capacitors

GREEN CAP Low Impedance 105°C 5000hours Anti-cleaning solvent

- Guarantees 5000 hours at 105°C.  
( $\phi 5$  to  $\phi 6.3$  : 2000 hours ;  $\phi 8$  to  $\phi 10$  : 3000 hours)

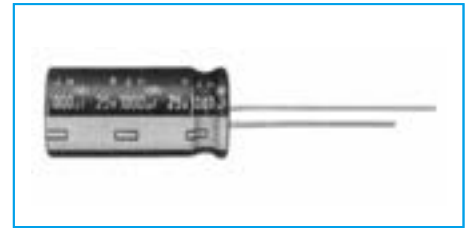


Marking color : White print on a black sleeve

### Specifications

Item	Performance										
Category temperature range (°C)	-55 to +105										
Tolerance at rated capacitance (%)	±20 (20°C, 120Hz)										
Leakage current (µA) (max.)	0.01CV + 2 (after 2 minutes) C : Rated capacitance (µF) ; V : Rated voltage (V) (20°C)										
Tangent of loss angle (tanδ)	Rated voltage (V)	6.3	10	16	25	35	50	63	100		
	tanδ (max.)	0.22	0.19	0.16	0.14	0.12	0.10	0.08	0.07		
0.02 is added to every 1000µF increase over 1000µF. (20°C, 120Hz)											
Characteristics at high and low temperature	Rated voltage (V)	6.3	10	16	25	35	50	63	100		
	Impedance ratio (max.)	Z-25°C/Z+20°C	2	2	2	2	2	2	2	2	
		Z-55°C/Z+20°C	3	3	3	3	3	3	3	3	
(120Hz)											
Endurance (105°C) (Applied ripple current)	Test time	5000 hours ( $\phi 5$ to $\phi 6.3$ : 2000 hours) ( $\phi 8$ to $\phi 10$ : 3000 hours)									
	Leakage current	The initial specified value or less									
	Percentage of capacitance change	Within ±20% of initial value									
	Tangent of the loss angle	200% or less of the initial specified value									
Shelf life (105°C)	Test time	1000 hours									
	Leakage current	The initial specified value or less									
	Percentage of capacitance change	Within ±15% of initial value									
	Tangent of the loss angle	150% or less of the initial specified value									
Voltage application treatment : According to JIS C5101-4 4.1											
Applicable standards	JIS C5101 - 1, - 4 (IEC 60384 - 1, - 4)										

### Outline Drawing

Unit : mm

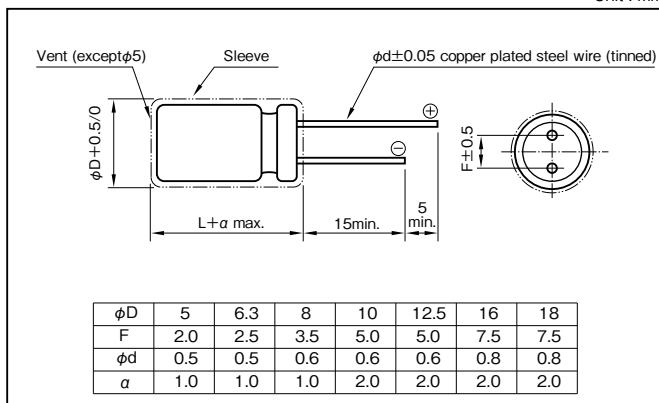

### Coefficient of Frequency for Rated Ripple Current

Rated capacitance (µF) \ Frequency (Hz)	120	1k	10k	100k
1 to 4.7	0.40	0.68	0.78	1
5.6 to 47	0.50	0.76	0.87	1
56 to 270	0.70	0.85	0.90	1
330 to 1000	0.80	0.93	0.98	1
1200 to 15000	0.90	0.95	1.00	1

Product code system : 10V5600µF (\*For general product)

RS*	RJH	562	M	1L	J31		T
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Lead-forming and packing code	Additional code

For details, refer to the various "Product Code System" pages.

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

## Standard Ratings

Rated voltage (V)			6.3 (1J)					10 (1L)				
Case φD×L (mm)	Size code	Item	Rated capacitance (μF)	ESR (Ω)	Impedance (Ω max.)		Rated ripple current (mA rms)	Rated capacitance (μF)	ESR (Ω)	Impedance (Ω max.)		Rated ripple current (mA rms)
					20°C	-10°C				20°C	-10°C	
5×11.5	C11		100	3.65	0.65	1.46	175	82	3.84	0.65	1.46	175
6.3×11.5	D11		220	1.66	0.31	0.70	290	180	1.75	0.31	0.70	290
8×12	E12		470	0.777	0.17	0.38	488	330	0.956	0.17	0.38	488
8×15	E15		680	0.537	0.13	0.29	617	470	0.671	0.13	0.29	617
8×20	E20		1000	0.365	0.095	0.21	800	680	0.464	0.095	0.21	800
10×12.5	F12		680	0.537	0.10	0.23	625	470	0.671	0.10	0.23	625
10×16	F16		820	0.446	0.080	0.18	825	560	0.563	0.080	0.18	825
10×20	F20		1200	0.305	0.062	0.14	1010	1000	0.316	0.062	0.14	1010
10×25	F25		1500	0.244	0.052	0.12	1190	1200	0.263	0.052	0.12	1190
10×30	F30		2200	0.181	0.044	0.099	1440	1500	0.211	0.044	0.099	1440
12.5×15	G15	•	1200	0.305	0.062	0.14	1010	• 1000	0.316	0.062	0.14	1010
12.5×20	G20		2200	0.181	0.042	0.095	1400	1800	0.176	0.042	0.095	1400
12.5×25	G25		2700	0.148	0.034	0.076	1690	2200	0.159	0.034	0.076	1690
12.5×30	G30		3900	0.111	0.030	0.068	1950	2700	0.130	0.030	0.068	1950
12.5×35	G35		4700	0.099	0.024	0.054	2220	3300	0.116	0.024	0.054	2220
12.5×40	G40		5600	0.089	0.021	0.047	2390	3900	0.098	0.021	0.047	2390
16×16	J16	•	2700	0.148	0.046	0.10	1310	• 1800	0.176	0.046	0.10	1310
16×20	J20	•	4700	0.099	0.034	0.077	1660	• 3300	0.116	0.034	0.077	1660
16×25	J25		5600	0.089	0.028	0.063	2070	3900	0.098	0.028	0.063	2070
16×31.5	J31		6800	0.079	0.025	0.056	2350	5600	0.080	0.025	0.056	2350
16×35.5	J35		8200	0.073	0.022	0.050	2550	6800	0.071	0.022	0.050	2550
16×40	J40		12000	0.059	0.018	0.041	2970	8200	0.067	0.018	0.041	2970
18×16	K16	•	3300	0.131	0.043	0.097	1460	• 2200	0.159	0.043	0.097	1460
18×20	K20	•	5600	0.089	0.030	0.068	1850	• 3900	0.098	0.030	0.068	1850
18×25	K25	•	6800	0.079	0.027	0.061	2120	• 4700	0.089	0.027	0.061	2120
18×31.5	K31		10000	0.064	0.023	0.052	2410	6800	0.071	0.023	0.052	2410
18×35.5	K35		12000	0.059	0.019	0.043	2680	8200	0.067	0.019	0.043	2680
18×40	K40		15000	0.054	0.017	0.038	3010	10000	0.059	0.017	0.038	3010

Rated voltage (V)			16 (1E)					25 (1T)				
Case φD×L (mm)	Size code	Item	Rated capacitance (μF)	ESR (Ω)	Impedance (Ω max.)		Rated ripple current (mA rms)	Rated capacitance (μF)	ESR (Ω)	Impedance (Ω max.)		Rated ripple current (mA rms)
					20°C	-10°C				20°C	-10°C	
5×11.5	C11		56	4.74	0.65	1.46	175	39	5.96	0.65	1.46	175
6.3×11.5	D11		120	2.21	0.31	0.70	290	82	2.83	0.31	0.70	290
8×12	E12		270	0.983	0.17	0.38	488	180	1.29	0.17	0.38	488
8×15	E15		330	0.805	0.13	0.29	617	220	1.06	0.13	0.29	617
8×20	E20		470	0.565	0.095	0.21	800	330	0.704	0.095	0.21	800
10×12.5	F12		330	0.805	0.10	0.23	625	220	1.06	0.10	0.23	625
10×16	F16		390	0.681	0.080	0.18	825	270	0.861	0.080	0.18	825
10×20	F20		680	0.391	0.062	0.14	1010	470	0.495	0.062	0.14	1010
10×25	F25		820	0.324	0.052	0.12	1190	560	0.415	0.052	0.12	1190
10×30	F30		1200	0.222	0.044	0.099	1440	820	0.284	0.044	0.099	1440
12.5×15	G15	•	680	0.391	0.062	0.14	1010	• 470	0.495	0.062	0.14	1010
12.5×20	G20		1200	0.222	0.042	0.095	1400	820	0.284	0.042	0.095	1400
12.5×25	G25		1500	0.177	0.034	0.076	1690	1000	0.233	0.034	0.076	1690
12.5×30	G30		2200	0.136	0.030	0.068	1950	1500	0.155	0.030	0.068	1950
12.5×35	G35		2700	0.111	0.024	0.054	2220	1800	0.130	0.024	0.054	2220
12.5×40	G40		3300	0.101	0.021	0.047	2390	2200	0.121	0.021	0.047	2390
16×16	J16	•	1500	0.177	0.046	0.10	1310	• 820	0.284	0.046	0.10	1310
16×20	J20	•	2200	0.136	0.034	0.077	1660	• 1500	0.155	0.034	0.077	1660
16×25	J25		2700	0.111	0.028	0.063	2070	1800	0.130	0.028	0.063	2070
16×31.5	J31		3900	0.086	0.025	0.056	2350	2700	0.099	0.025	0.056	2350
16×35.5	J35		4700	0.078	0.022	0.050	2550	3300	0.091	0.022	0.050	2550
16×40	J40		5600	0.072	0.018	0.041	2970	3900	0.077	0.018	0.041	2970
18×16	K16	•	1500	0.177	0.043	0.097	1460	• 1200	0.194	0.043	0.097	1460
18×20	K20	•	2700	0.111	0.030	0.068	1850	• 1800	0.130	0.030	0.068	1850
18×25	K25	•	3900	0.086	0.027	0.061	2120	• 2700	0.099	0.027	0.061	2120
18×31.5	K31		4700	0.078	0.023	0.052	2410	3300	0.091	0.023	0.052	2410
18×35.5	K35		6800	0.064	0.019	0.043	2680	3900	0.077	0.019	0.043	2680
18×40	K40		8200	0.061	0.017	0.038	3010	4700	0.071	0.017	0.038	3010

(Note) Rated ripple current : 105°C, 100kHz ; ESR : 20°C, 120Hz ; Impedance : 100kHz  
 • : The black circles in the capacitance column denote semi-standard products.

NOTE : Design, Specifications are subject to change without notice.  
 It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

## Standard Ratings

Rated voltage (V)			35 (1G)					50 (1U)				
Case φD×L (mm)	Size code	Item	Rated capacitance (μF)	ESR (Ω)	Impedance (Ω max.)		Rated ripple current (mA rms)	Rated capacitance (μF)	ESR (Ω)	Impedance (Ω max.)		Rated ripple current (mA rms)
					20°C	-10°C				20°C	-10°C	
5×11.5	C11		—	—	—	—	—	1	166	3.5	7.0	36
5×11.5	C11		—	—	—	—	—	2	75.4	3.0	6.0	54
5×11.5	C11		—	—	—	—	—	3.3	50.3	2.6	5.2	63
5×11.5	C11		—	—	—	—	—	4.7	35.3	2.2	4.4	75
5×11.5	C11		—	—	—	—	—	10	16.6	1.4	2.8	110
5×11.5	C11		27	7.37	0.65	1.46	175	18	9.22	0.95	1.9	120
6.3×11.5	D11		56	3.56	0.31	0.70	290	39	4.25	0.43	0.86	148
8×12	E12		120	1.66	0.17	0.38	488	68	2.44	0.20	0.40	360
8×15	E15		180	1.11	0.13	0.29	617	82	2.02	0.18	0.36	460
8×20	E20		220	0.905	0.095	0.21	800	120	1.38	0.13	0.26	670
10×12.5	F12		150	1.33	0.10	0.23	625	82	2.02	0.18	0.36	443
10×16	F16		180	1.11	0.080	0.18	825	100	1.66	0.15	0.30	553
10×20	F20		330	0.604	0.062	0.14	1010	180	0.922	0.085	0.17	676
10×25	F25		390	0.511	0.052	0.12	1190	220	0.754	0.075	0.15	876
10×30	F30		560	0.356	0.044	0.099	1440	330	0.503	0.055	0.11	1010
12.5×15	G15	•	330	0.604	0.062	0.140	1010	• 180	0.922	0.095	0.19	745
12.5×20	G20		560	0.356	0.042	0.095	1400	330	0.503	0.060	0.12	979
12.5×25	G25		680	0.293	0.034	0.076	1690	470	0.353	0.044	0.088	1180
12.5×30	G30		1000	0.200	0.030	0.068	1950	560	0.297	0.040	0.080	1310
12.5×35	G35		1200	0.166	0.024	0.054	2220	680	0.244	0.036	0.072	1470
12.5×40	G40		1500	0.133	0.021	0.047	2390	820	0.203	0.034	0.068	1590
16×16	J16	•	560	0.356	0.046	0.10	1310	• 330	0.503	0.065	0.13	982
16×20	J20	•	1000	0.200	0.034	0.077	1660	• 680	0.244	0.045	0.090	1210
16×25	J25		1200	0.166	0.028	0.063	2070	820	0.203	0.038	0.076	1490
16×31.5	J31		1800	0.111	0.025	0.056	2350	1000	0.166	0.032	0.064	1890
16×35.5	J35		2200	0.106	0.022	0.050	2550	1200	0.139	0.028	0.056	2140
16×40	J40		2700	0.087	0.018	0.041	2970	1500	0.111	0.026	0.052	2410
18×16	K16	•	680	0.293	0.043	0.097	1460	• 470	0.353	0.048	0.096	1180
18×20	K20	•	1200	0.166	0.030	0.068	1850	• 820	0.203	0.036	0.072	1450
18×25	K25	•	1800	0.111	0.027	0.061	2120	• 1000	0.166	0.032	0.064	1720
18×31.5	K31		2200	0.106	0.023	0.052	2410	1500	0.111	0.026	0.052	1970
18×35.5	K35		2700	0.087	0.019	0.043	2680	1800	0.074	0.025	0.050	2310
18×40	K40		3300	0.081	0.017	0.038	3010	2200	0.073	0.024	0.048	2530



Rated voltage (V)			63 (4E)					100 (1H)				
Case φD×L (mm)	Size code	Item	Rated capacitance (μF)	ESR (Ω)	Impedance (Ω max.)		Rated ripple current (mA rms)	Rated capacitance (μF)	ESR (Ω)	Impedance (Ω max.)		Rated ripple current (mA rms)
					20°C	-10°C				20°C	-10°C	
5×11.5	C11		12	11.1	1.2	3.6	120	5.6	20.7	1.9	7.6	57
6.3×11.5	D11		27	4.92	0.55	1.7	148	12	9.68	1.1	4.4	78
8×12	E12		47	2.82	0.32	0.96	360	22	5.28	0.53	2.1	275
8×15	E15		68	1.95	0.24	0.72	469	33	3.52	0.35	1.4	360
8×20	E20		82	1.62	0.17	0.51	682	39	2.98	0.27	1.1	490
10×12.5	F12		56	2.37	0.23	0.69	448	27	4.30	0.47	1.9	319
10×16	F16		68	1.95	0.17	0.51	553	33	3.52	0.32	1.3	424
10×20	F20		120	1.11	0.12	0.36	676	56	2.07	0.25	1.0	499
10×25	F25		150	0.885	0.10	0.30	876	68	1.71	0.18	0.72	634
10×30	F30		180	0.738	0.085	0.26	1020	100	1.16	0.15	0.60	739
12.5×15	G15	•	150	0.885	0.11	0.33	745	• 68	1.71	0.20	0.80	613
12.5×20	G20		220	0.604	0.075	0.23	979	100	1.16	0.13	0.52	805
12.5×25	G25		270	0.492	0.065	0.20	1180	120	0.968	0.11	0.44	857
12.5×30	G30		390	0.341	0.055	0.17	1310	180	0.646	0.090	0.36	1120
12.5×35	G35		470	0.283	0.048	0.14	1470	220	0.528	0.075	0.30	1240
12.5×40	G40		560	0.237	0.042	0.13	1590	270	0.431	0.060	0.24	1330
16×16	J16	•	220	0.604	0.080	0.24	982	• 120	0.968	0.13	0.52	706
16×20	J20	•	390	0.341	0.057	0.17	1210	• 180	0.646	0.11	0.44	916
16×25	J25		470	0.283	0.052	0.16	1490	220	0.528	0.081	0.32	1290
16×31.5	J31		680	0.196	0.042	0.13	1890	330	0.352	0.059	0.23	1630
16×35.5	J35		820	0.162	0.036	0.11	2140	390	0.298	0.052	0.21	1750
16×40	J40		1000	0.133	0.032	0.096	2410	470	0.248	0.045	0.18	1920
18×16	K16	•	330	0.403	0.065	0.20	1200	• 150	0.775	0.12	0.48	871
18×20	K20	•	470	0.237	0.058	0.17	1460	• 270	0.431	0.085	0.34	1170
18×25	K25	•	680	0.196	0.050	0.15	1740	• 330	0.352	0.071	0.28	1500
18×31.5	K31		820	0.162	0.042	0.13	1990	390	0.298	0.058	0.23	1630
18×35.5	K35		1000	0.133	0.035	0.11	2340	560	0.208	0.054	0.22	1920
18×40	K40		1200	0.111	0.032	0.096	2560	680	0.171	0.041	0.16	2100

(Note) Rated ripple current : 105°C, 100kHz ; ESR : 20°C, 120Hz ; Impedance : 100kHz  
 • : The black circles in the capacitance column denote semi-standard products.

## 105°C Use, Miniature, High-Reliability, Extra Low Impedance Capacitors

GREEN CAP	Low Impedance	105°C 10000hours	Anti-cleaning solvent
-----------	---------------	------------------	-----------------------

- Higher ripple current and Lower impedance than RJB series.

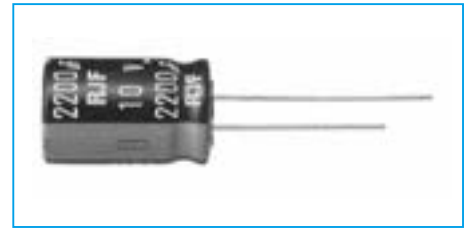


Marking color : White print on a black sleeve

### Specifications

Item	Performance																													
Category temperature range (°C)	-40 to +105																													
Tolerance at rated capacitance (%)	±20 (20°C,120Hz)																													
Leakage current (µA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (µF) ; V : Rated voltage (V) (20°C)																													
Tangent of loss angle (tanδ)	<table border="1"> <tr> <td>Rated voltage (V)</td> <td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td><td>63</td><td>80</td><td>100</td> </tr> <tr> <td>tanδ (max.)</td> <td>0.22</td><td>0.19</td><td>0.16</td><td>0.14</td><td>0.12</td><td>0.10</td><td>0.09</td><td>0.09</td><td>0.08</td> </tr> </table> <p>0.02 is added to every 1000µF increase over 1000µF. (20°C,120Hz)</p>	Rated voltage (V)	6.3	10	16	25	35	50	63	80	100	tanδ (max.)	0.22	0.19	0.16	0.14	0.12	0.10	0.09	0.09	0.08									
Rated voltage (V)	6.3	10	16	25	35	50	63	80	100																					
tanδ (max.)	0.22	0.19	0.16	0.14	0.12	0.10	0.09	0.09	0.08																					
Characteristics at high and low temperature	<table border="1"> <tr> <td>Rated voltage (V)</td> <td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td><td>63</td><td>80</td><td>100</td> </tr> <tr> <td rowspan="2">Impedance ratio (max.)</td> <td>Z-25°C/Z+20°C</td> <td>2</td><td>2</td><td>2</td><td>2</td><td>2</td><td>2</td><td>2</td><td>2</td> </tr> <tr> <td>Z-40°C/Z+20°C</td> <td>3</td><td>3</td><td>3</td><td>3</td><td>3</td><td>3</td><td>3</td><td>3</td> </tr> </table> <p>(120Hz)</p>	Rated voltage (V)	6.3	10	16	25	35	50	63	80	100	Impedance ratio (max.)	Z-25°C/Z+20°C	2	2	2	2	2	2	2	2	Z-40°C/Z+20°C	3	3	3	3	3	3	3	3
Rated voltage (V)	6.3	10	16	25	35	50	63	80	100																					
Impedance ratio (max.)	Z-25°C/Z+20°C	2	2	2	2	2	2	2	2																					
	Z-40°C/Z+20°C	3	3	3	3	3	3	3	3																					
Endurance (105°C) (Applied ripple current)	<table border="1"> <tr> <td>Test time</td> <td>5L &amp; 7L : 1000 hours φ5 &amp; φ6.3 : 2000 hours (63 to 100WV:5000 hours) φ8 &amp; φ10 : 3000 hours (63 to 100WV:7000 hours) φ12.5 to φ18 : 5000 hours (63 to 100WV:10000 hours)</td> </tr> <tr> <td>Leakage current</td> <td>The initial specified value or less</td> </tr> <tr> <td>Percentage of capacitance change</td> <td>Within ±25% of initial value</td> </tr> <tr> <td>Tangent of the loss angle</td> <td>200% or less of the initial specified value</td> </tr> </table>	Test time	5L & 7L : 1000 hours φ5 & φ6.3 : 2000 hours (63 to 100WV:5000 hours) φ8 & φ10 : 3000 hours (63 to 100WV:7000 hours) φ12.5 to φ18 : 5000 hours (63 to 100WV:10000 hours)	Leakage current	The initial specified value or less	Percentage of capacitance change	Within ±25% of initial value	Tangent of the loss angle	200% or less of the initial specified value																					
Test time	5L & 7L : 1000 hours φ5 & φ6.3 : 2000 hours (63 to 100WV:5000 hours) φ8 & φ10 : 3000 hours (63 to 100WV:7000 hours) φ12.5 to φ18 : 5000 hours (63 to 100WV:10000 hours)																													
Leakage current	The initial specified value or less																													
Percentage of capacitance change	Within ±25% of initial value																													
Tangent of the loss angle	200% or less of the initial specified value																													
Shelf life (105°C)	<table border="1"> <tr> <td>Test time</td> <td>1000 hours</td> </tr> <tr> <td>Leakage current</td> <td>The initial specified value or less</td> </tr> <tr> <td>Percentage of capacitance change</td> <td>Within ±25% of initial value</td> </tr> <tr> <td>Tangent of the loss angle</td> <td>200% or less of the initial specified value</td> </tr> </table> <p>Voltage application treatment : According to JIS C5101-4 4.1</p>	Test time	1000 hours	Leakage current	The initial specified value or less	Percentage of capacitance change	Within ±25% of initial value	Tangent of the loss angle	200% or less of the initial specified value																					
Test time	1000 hours																													
Leakage current	The initial specified value or less																													
Percentage of capacitance change	Within ±25% of initial value																													
Tangent of the loss angle	200% or less of the initial specified value																													
Applicable standards	JIS C5101 - 1,- 4 (IEC 60384 - 1,- 4)																													

### Outline Drawing

Unit : mm

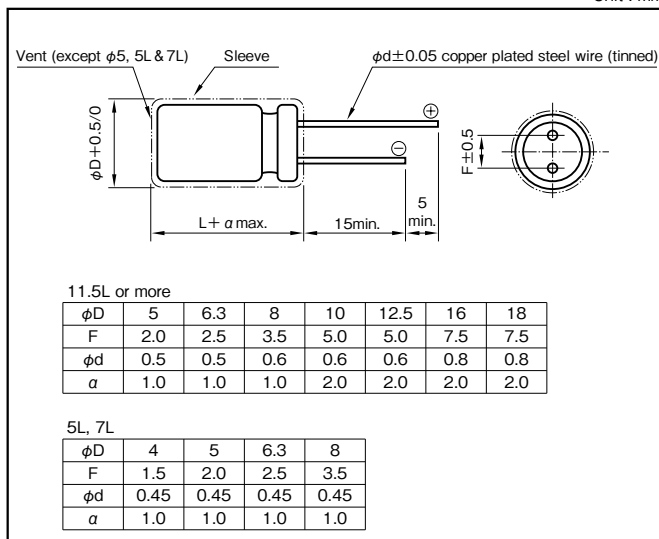

### Coefficient of Frequency for Rated Ripple Current

Rated capacitance (µF) \ Frequency (Hz)	120	1k	10k	100k
5.6 to 180	0.40	0.75	0.90	1
220 to 390	0.50	0.85	0.94	1
470 to 1800	0.60	0.87	0.95	1
2200 to 3900	0.75	0.90	0.95	1
4700 to 6800	0.85	0.95	0.98	1

Product code system : 10V1000µF (\*For general product)

RS*	RJF	102	M	1L	F16		T
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Lead-forming and packing code	Additional code

For details, refer to the various "Product Code System" pages.

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.



## Standard Ratings

Rated voltage (V)	Item	6.3 (1J)					10 (1L)					16 (1E)				
		Case $\phi$ DxL (mm)	Size code	Impedance ( $\Omega$ max.)		Rated ripple current (mA rms)	Case $\phi$ DxL (mm)	Size code	Impedance ( $\Omega$ max.)		Rated ripple current (mA rms)	Case $\phi$ DxL (mm)	Size code	Impedance ( $\Omega$ max.)		Rated ripple current (mA rms)
				20°C	-10°C				20°C	-10°C				20°C	-10°C	
18	—	—	—	—	—	—	—	—	—	—	4 × 7	B07	0.92	2.8	130	
27	—	—	—	—	—	4 × 7	B07	0.89	2.7	130	6.3 × 5	D05	0.30	0.95	210	
33	—	—	—	—	—	—	—	—	—	—	5 × 7	C07	0.45	1.4	210	
39	4 × 7	B07	0.85	2.6	130	—	—	—	—	—	6.3 × 5	D05	0.30	0.95	210	
47	—	—	—	—	—	6.3 × 5	D05	0.29	0.93	210	—	—	—	—	—	
56	—	—	—	—	—	5 × 7	C07	0.44	1.4	210	5 × 11.5	C11	0.22	0.80	345	
68	5 × 7	C07	0.43	1.3	210	—	—	—	—	—	6.3 × 7	D07	0.24	0.72	300	
100	6.3 × 5	D05	0.28	0.91	210	5 × 11.5	C11	0.22	0.8	345	—	—	—	—	—	
120	—	—	—	—	—	6.3 × 7	D07	0.23	0.69	300	8 × 7	E07	0.15	0.45	380	
150	—	—	—	—	—	—	—	—	—	—	6.3 × 11.5	D11	0.094	0.35	540	
180	—	—	—	—	—	8 × 7	E07	0.15	0.45	380	—	—	—	—	—	
220	8 × 7	E07	0.15	0.45	380	6.3 × 11.5	D11	0.094	0.35	540	—	—	—	—	—	
330	6.3 × 11.5	D11	0.094	0.35	540	—	—	—	—	—	8 × 12	E12	0.056	0.19	945	
470	—	—	—	—	—	8 × 12	E12	0.056	0.19	945	8 × 15	E15	0.045	0.15	1250	
560	8 × 12	E12	0.056	0.19	945	—	—	—	—	—	10 × 16	F16	0.028	0.10	1760	
680	—	—	—	—	—	10 × 12.5	F12	0.039	0.14	1330	—	—	—	—	—	
820	8 × 15	E15	0.045	0.15	1250	—	—	—	—	—	—	—	—	—	—	
1000	10 × 12.5	F12	0.039	0.14	1330	10 × 16	F16	0.028	0.10	1760	10 × 20	F20	0.020	0.060	1960	
1200	10 × 16	F16	0.028	0.10	1760	10 × 20	F20	0.020	0.060	1960	10 × 25	F25	0.018	0.054	2250	
1500	10 × 20	F20	0.020	0.060	1960	10 × 25	F25	0.018	0.054	2250	12.5 × 20	G20	0.017	0.043	2480	
2200	10 × 25	F25	0.018	0.054	2250	12.5 × 20	G20	0.017	0.043	2480	12.5 × 25	G25	0.015	0.038	2900	
2700	—	—	—	—	—	—	—	—	—	—	16 × 20	J20	0.015	0.038	3250	
3300	12.5 × 20	G20	0.017	0.043	2480	12.5 × 25	G25	0.015	0.038	2900	16 × 25	J25	0.013	0.035	3630	
3900	12.5 × 25	G25	0.015	0.038	2900	16 × 20	J20	0.015	0.038	3250	16 × 25	J25	0.013	0.035	3630	
4700	12.5 × 30	G30	0.013	0.033	3450	16 × 25	J25	0.013	0.035	3630	—	—	—	—	—	
5600	16 × 20	J20	0.015	0.038	3570	16 × 25	J25	0.013	0.035	3630	—	—	—	—	—	
6800	16 × 25	J25	0.013	0.035	3630	—	—	—	—	—	—	—	—	—	—	

Rated voltage (V)	Item	25 (1T)					35 (1G)					50 (1U)				
		Case $\phi$ D × L (mm)	Size code	Impedance ( $\Omega$ max.)		Rated ripple current (mA rms)	Case $\phi$ D × L (mm)	Size code	Impedance ( $\Omega$ max.)		Rated ripple current (mA rms)	Case $\phi$ D × L (mm)	Size code	Impedance ( $\Omega$ max.)		Rated ripple current (mA rms)
				20°C	-10°C				20°C	-10°C				20°C	-10°C	
5.6	—	—	—	—	—	—	—	—	—	—	4 × 7	B07	1.0	3.0	130	
10	5 × 5	C05	0.61	1.5	130	5 × 5	C05	0.63	1.5	130	5 × 7	C07	0.50	1.5	210	
15	4 × 7	B07	0.94	2.9	130	4 × 7	B07	0.96	2.9	130	—	—	—	—	—	
18	—	—	—	—	—	5 × 7	C07	0.47	1.5	210	—	—	—	—	—	
22	6.3 × 5	D05	0.31	0.97	210	6.3 × 5	D05	0.32	1.0	210	6.3 × 7	D07	0.26	0.78	300	
27	5 × 7	C07	0.46	1.4	210	—	—	—	—	—	5 × 11.5	C11	0.34	1.18	238	
33	—	—	—	—	—	5 × 11.5	C11	0.22	0.80	345	8 × 7	E07	0.17	0.51	380	
39	—	—	—	—	—	6.3 × 7	D07	0.25	0.75	300	—	—	—	—	—	
47	5 × 11.5	C11	0.22	0.80	345	—	—	—	—	—	—	—	—	—	—	
56	6.3 × 7	D07	0.24	0.72	300	8 × 7	E07	0.16	0.48	380	6.3 × 11.5	D11	0.14	0.50	385	
100	—	—	—	—	—	6.3 × 11.5	D11	0.094	0.35	540	—	—	—	—	—	
120	8 × 7	E07	0.15	0.45	380	—	—	—	—	—	8 × 12	E12	0.074	0.22	724	
150	6.3 × 11.5	D11	0.094	0.35	540	—	—	—	—	—	8 × 15	E15	0.061	0.18	950	
180	—	—	—	—	—	8 × 12	E12	0.056	0.19	945	10 × 12.5	F12	0.061	0.18	979	
220	8 × 12	E12	0.056	0.19	945	10 × 12.5	F12	0.039	0.14	1330	8 × 20	E20	0.046	0.14	1190	
270	—	—	—	—	—	8 × 20	E20	0.029	0.11	1500	10 × 16	F16	0.042	0.12	1370	
330	10 × 12.5	F12	0.039	0.14	1330	10 × 16	F16	0.028	0.10	1760	10 × 20	F20	0.030	0.090	1580	
470	10 × 16	F16	0.028	0.10	1760	10 × 20	F20	0.020	0.060	1960	10 × 25	F25	0.028	0.085	1870	
560	—	—	—	—	—	10 × 20	F20	0.020	0.060	1960	12.5 × 20	G20	0.027	0.068	2050	
680	10 × 20	F20	0.020	0.060	1960	10 × 25	F25	0.018	0.054	2250	12.5 × 25	G25	0.023	0.059	2410	
820	10 × 25	F25	0.018	0.054	2250	12.5 × 20	G20	0.017	0.043	2480	16 × 20	J20	0.023	0.059	2730	
1000	12.5 × 20	G20	0.017	0.043	2480	—	—	—	—	—	16 × 20	J20	0.023	0.059	2730	
1200	—	—	—	—	—	12.5 × 25	G25	0.015	0.038	2900	16 × 25	J25	0.021	0.056	3010	
1500	12.5 × 25	G25	0.015	0.038	2900	16 × 20	J20	0.015	0.038	3250	—	—	—	—	—	
1800	16 × 20	J20	0.015	0.038	3250	16 × 25	J25	0.013	0.035	3630	—	—	—	—	—	
2200	16 × 25	J25	0.013	0.035	3630	16 × 25	J25	0.013	0.035	3630	—	—	—	—	—	
2700	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	

(Note) Rated ripple current : 105°C, 100kHz ; Impedance : 100kHz

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

## Standard Ratings

Rated voltage (V) Rated capacitance (μF)	Item	63 (4E)				80 (1R)					100 (1H)					
		Case φDxL (mm)	Size code	Impedance (Ω max.)		Rated ripple current (mA rms)	Case φDxL (mm)	Size code	Impedance (Ω max.)		Rated ripple current (mA rms)	Case φDxL (mm)	Size code	Impedance (Ω max.)		Rated ripple current (mA rms)
				20°C	-10°C				20°C	-10°C				20°C	-10°C	
6.8	—	—	—	—	—	—	—	—	—	—	5 × 11.5	C11	1.4	5.6	125	
15	—	5 × 11.5	C11	0.88	3.5	165	—	—	—	—	6.3 × 11.5	D11	0.57	2.3	205	
27	—	—	—	—	—	—	—	—	—	—	8 × 12	E12	0.36	1.4	335	
33	—	6.3 × 11.5	D11	0.35	1.4	265	—	—	—	—	—	—	—	—	—	
39	—	—	—	—	—	—	—	—	—	—	8 × 15	E15	0.25	1.0	450	
47	—	—	—	—	—	—	—	—	—	—	10 × 12.5	F12	0.17	0.66	480	
56	—	8 × 12	E12	0.22	0.88	500	—	—	—	—	8 × 20	E20	0.19	0.76	565	
68	—	—	—	—	—	—	10 × 12.5	F12	0.17	0.66	480	10 × 16	F16	0.11	0.47	600
82	—	10 × 12.5	F12	0.11	0.44	690	—	—	—	—	10 × 20	F20	0.084	0.34	800	
100	—	—	—	—	—	—	10 × 16	F16	0.11	0.47	600	12.5 × 15	G15	0.11	0.34	750
120	—	8 × 20	E20	0.12	0.48	820	10 × 20	F20	0.084	0.34	800	10 × 25	F25	0.069	0.28	900
	—	10 × 16	F16	0.076	0.31	950										
150	—	—	—	—	—	10 × 25	F25	0.069	0.28	900	12.5 × 20	G20	0.062	0.18	1100	
180	—	10 × 20	F20	0.056	0.23	1150	—	—	—	—	—	—	—	—	—	
220	—	10 × 25	F25	0.046	0.19	1350	12.5 × 20	G20	0.062	0.18	1100	16 × 20	J20	0.048	0.15	1350
270	—	12.5 × 20	G20	0.041	0.13	1500	—	—	—	—	12.5 × 30	G30	0.042	0.13	1500	
330	—	—	—	—	—	—	12.5 × 25	G25	0.047	0.14	1250	12.5 × 35	G35	0.036	0.11	1650
	—	—	—	—	—	—	16 × 20	J20	0.048	0.15	1350	16 × 25	J25	0.038	0.12	1700
	—	—	—	—	—	—	18 × 20	K20	0.045	0.14	1500	18 × 20	K20	0.045	0.14	1500
390	—	12.5 × 25	G25	0.031	0.093	1900	12.5 × 30	G30	0.042	0.13	1500	12.5 × 40	G40	0.032	0.095	1800
470	—	12.5 × 30	G30	0.028	0.084	2300	12.5 × 35	G35	0.036	0.11	1650	16 × 31.5	J31	0.032	0.095	1850
	—	16 × 20	J20	0.032	0.096	2000	16 × 25	J25	0.038	0.12	1700	18 × 25	K25	0.036	0.11	1750
	—	—	—	—	—	—	18 × 20	K20	0.045	0.14	1500	—	—	—	—	—
560	—	12.5 × 35	G35	0.024	0.070	2500	—	—	—	—	—	16 × 35.5	J35	0.029	0.086	2000
	—	—	—	—	—	—	—	—	—	—	—	18 × 31.5	K31	0.030	0.090	1900
680	—	12.5 × 40	G40	0.021	0.063	2800	16 × 31.5	J31	0.032	0.095	1850	16 × 40	J40	0.027	0.081	2480
	—	16 × 25	J25	0.025	0.075	2600						18 × 35.5	K35	0.027	0.081	2200
	—	18 × 20	K20	0.030	0.090	2500						—	—	—	—	—
820	—	16 × 31.5	J31	0.021	0.063	2850	16 × 35.5	J35	0.029	0.086	2000	18 × 40	K40	0.026	0.077	2700
	—	18 × 25	K25	0.024	0.072	2800	18 × 31.5	K31	0.030	0.090	1900					
1000	—	16 × 35.5	J35	0.019	0.057	2900	—	—	—	—	—	—	—	—	—	
1200	—	16 × 40	J40	0.018	0.054	3400	18 × 40	K40	0.026	0.077	2700	—	—	—	—	—
	—	18 × 31.5	K31	0.020	0.060	3300						—	—	—	—	—
1500	—	18 × 35.5	K35	0.018	0.054	3400	—	—	—	—	—	—	—	—	—	
1800	—	18 × 40	K40	0.017	0.051	3500	—	—	—	—	—	—	—	—	—	

(Note) Rated ripple current : 105°C , 100kHz ; Impedance : 100kHz

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

### 105°C Use, Miniature, Long Life, Extra Low Impedance Capacitors



GREEN CAP

Low Impedance

105°C 10000hours

Anti-cleaning solvent

- Long life than RJF series.
- Guarantees 10000 hours at 105°C.  
( $\phi 5$ ,  $\phi 6.3$  : 6000 hours,  $\phi 8$  : 8000 hours)

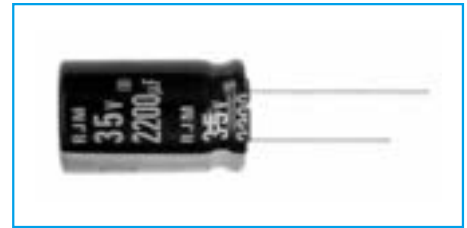


Marking color : White print on a black sleeve

### Specifications

Item	Performance						
Category temperature range (°C)	-40 to +105						
Tolerance at rated capacitance (%)	±20 (20°C, 120Hz)						
Leakage current (µA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (µF), V : Rated voltage (V) (20°C)						
Tangent of loss angle (tanδ)	Rated voltage (V)	6.3	10	16	25	35	50
	tanδ (max.)	0.22	0.19	0.16	0.14	0.12	0.10
0.02 is added to every 1000µF increase over 1000µF. (20°C, 120Hz)							
Characteristics at high and low temperature	Rated voltage (V)	6.3	10	16	25	35	50
	Impedance ratio (max.)	Z-25°C/Z+20°C	2	2	2	2	2
Z-40°C/Z+20°C		3	3	3	3	3	3
(120Hz)							
Endurance (105°C) (Applied ripple current)	Test time	ϕ5 & ϕ6.3 : 6000 hours ϕ8 : 8000 hours ϕ10 or more: 10000 hours					
	Leakage current	The initial specified value or less					
	Percentage of capacitance change	Within ±25% of initial value (ϕ6.3 or less : ±30%)					
	Tangent of the loss angle	200% or less of the initial specified value					
Shelf life (105°C)	Test time	1000 hours					
	Leakage current	The initial specified value or less					
	Percentage of capacitance change	Within ±25% of initial value (ϕ6.3 or less : ±30%)					
	Tangent of the loss angle	200% or less of the initial specified value					
Voltage application treatment : According to JIS C5101-4 4.1							
Applicable standards	JIS C5101 - 1, - 4 (IEC 60384 - 1, - 4)						

### Outline Drawing

Unit : mm

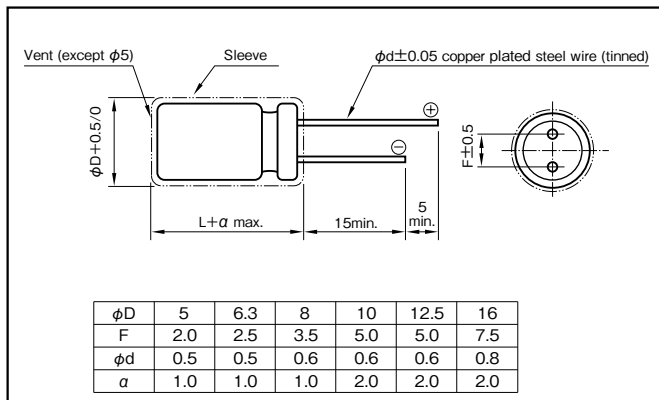

### Coefficient of Frequency for Rated Ripple Current

Rated capacitance (µF)	Frequency (Hz)			
	120	1k	10k	100k
27 to 33	0.42	0.70	0.90	1
39 to 270	0.50	0.73	0.92	1
330 to 680	0.55	0.77	0.94	1
820 to 1800	0.60	0.80	0.96	1
2200 to 8200	0.70	0.85	0.98	1

### Product code system : 10V1000µF (\*For general product)

RS*	RJM	102	M	1L	E15		T
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Lead-forming and packing code	Additional code

For details, refer to the various "Product Code System" pages.

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

## Standard Ratings

Rated voltage(V) Item Rated capacitance (μF)	6.3 (1J)					10 (1L)					16 (1E)				
	Case φDxL (mm)	Size code	Impedance (Ω max.)		Rated ripple current (mAmps)	Case φDxL (mm)	Size code	Impedance (Ω max.)		Rated ripple current (mAmps)	Case φDxL (mm)	Size code	Impedance (Ω max.)		Rated ripple current (mAmps)
			20°C	-10°C				20°C	-10°C				20°C	-10°C	
82	—	—	—	—	—	—	—	—	—	—	5×11.5	C11	0.22	0.80	345
100	—	—	—	—	—	5×11.5	C11	0.22	0.80	345	5×11.5	C11	0.22	0.80	345
120	—	—	—	—	—	5×11.5	C11	0.22	0.80	345	—	—	—	—	—
150	5×11.5	C11	0.22	0.80	345	5×11.5	C11	0.22	0.80	345	—	—	—	—	—
180	—	—	—	—	—	—	—	—	—	—	6.3×11.5	D11	0.094	0.35	540
220	5×11.5	C11	0.22	0.80	345	6.3×11.5	D11	0.094	0.35	540	6.3×11.5	D11	0.094	0.35	540
270	—	—	—	—	—	6.3×11.5	D11	0.094	0.35	540	—	—	—	—	—
330	6.3×11.5	D11	0.094	0.35	540	6.3×11.5	D11	0.094	0.35	540	—	—	—	—	—
470	6.3×11.5	D11	0.094	0.35	540	—	—	—	—	—	8×12	E12	0.056	0.19	945
680	—	—	—	—	—	8×12	E12	0.056	0.19	945	8×15	E15	0.045	0.15	1250
820	8×12	E12	0.056	0.19	945	—	—	—	—	—	10×12.5	F12	0.039	0.14	1560
1000	—	—	—	—	—	8×15	E15	0.045	0.15	1250	8×20	E20	0.029	0.11	1500
1200	8×15	E15	0.045	0.15	1250	10×12.5	F12	0.039	0.14	1560	10×16	F16	0.028	0.10	2000
1500	10×12.5	F12	0.039	0.14	1560	—	—	—	—	—	—	—	—	—	—
1800	8×20	E20	0.029	0.11	1500	8×20	E20	0.029	0.11	1500	10×20	F20	0.020	0.060	2500
2200	10×16	F16	0.028	0.10	2000	10×20	F20	0.020	0.060	2500	10×25	F25	0.017	0.051	2900
2700	10×20	F20	0.020	0.060	2500	10×25	F25	0.017	0.051	2900	12.5×20	G20	0.017	0.043	2600
3300	10×25	F25	0.017	0.051	2900	—	—	—	—	—	12.5×25	G25	0.015	0.038	3200
3900	—	—	—	—	—	12.5×20	G20	0.017	0.043	2600	12.5×30	G30	0.013	0.033	3795
4700	12.5×20	G20	0.017	0.043	2600	12.5×25	G25	0.015	0.038	3200	12.5×35	G35	0.012	0.031	4120
5600	12.5×25	G25	0.015	0.038	3200	16×20	J20	0.015	0.038	3575	16×25	J25	0.013	0.035	3810
6800	12.5×30	G30	0.013	0.033	3795	12.5×35	G35	0.012	0.031	4120	—	—	—	—	—
8200	12.5×35	G35	0.012	0.031	4120	16×25	J25	0.013	0.035	3810	—	—	—	—	—
—	16×20	J20	0.015	0.038	3575	—	—	—	—	—	—	—	—	—	—
—	16×25	J25	0.013	0.035	3810	—	—	—	—	—	—	—	—	—	—

Rated voltage(V) Item Rated capacitance (μF)	25 (1T)					35 (1G)					50 (1U)				
	Case φDxL (mm)	Size code	Impedance (Ω max.)		Rated ripple current (mAmps)	Case φDxL (mm)	Size code	Impedance (Ω max.)		Rated ripple current (mAmps)	Case φDxL (mm)	Size code	Impedance (Ω max.)		Rated ripple current (mAmps)
			20°C	-10°C				20°C	-10°C				20°C	-10°C	
27	—	—	—	—	—	—	—	—	—	—	5×11.5	C11	0.34	1.18	238
39	5×11.5	C11	0.22	0.80	345	5×11.5	C11	0.22	0.80	345	6.3×11.5	D11	0.14	0.50	385
47	—	—	—	—	—	5×11.5	C11	0.22	0.80	345	—	—	—	—	—
56	5×11.5	C11	0.22	0.80	345	—	—	—	—	—	6.3×11.5	D11	0.14	0.50	385
68	5×11.5	C11	0.22	0.80	345	—	—	—	—	—	—	—	—	—	—
82	5×11.5	C11	0.22	0.80	345	6.3×11.5	D11	0.094	0.35	540	—	—	—	—	—
100	6.3×11.5	D11	0.094	0.35	540	6.3×11.5	D11	0.094	0.35	540	8×12	E12	0.074	0.22	724
120	6.3×11.5	D11	0.094	0.35	540	—	—	—	—	—	8×15	E15	0.061	0.18	950
150	6.3×11.5	D11	0.094	0.35	540	—	—	—	—	—	10×12.5	F12	0.061	0.18	1250
180	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
220	—	—	—	—	—	8×12	E12	0.056	0.19	945	8×20	E20	0.046	0.14	1190
270	—	—	—	—	—	8×15	E15	0.045	0.15	1250	10×16	F16	0.042	0.12	1650
330	8×12	E12	0.056	0.19	945	10×12.5	F12	0.039	0.14	1560	10×20	F20	0.030	0.090	2060
390	8×15	E15	0.045	0.15	1250	10×16	F16	0.028	0.10	2000	10×25	F25	0.028	0.084	2420
470	10×12.5	F12	0.039	0.14	1560	10×20	F20	0.020	0.060	2500	12.5×20	G20	0.027	0.068	2300
560	8×20	E20	0.029	0.11	1500	10×25	F25	0.017	0.051	2900	12.5×25	G25	0.023	0.059	2800
680	10×16	F16	0.028	0.10	2000	12.5×30	G30	0.021	0.052	3500	12.5×35	G35	0.019	0.051	3810
820	10×20	F20	0.020	0.060	2500	—	—	—	—	—	16×20	J20	0.023	0.059	3070
1000	10×25	F25	0.017	0.051	2900	12.5×20	G20	0.017	0.043	2600	16×25	J25	0.021	0.056	3270
1200	—	—	—	—	—	12.5×25	G25	0.015	0.038	3200	—	—	—	—	—
1500	12.5×20	G20	0.017	0.043	2600	12.5×30	G30	0.013	0.033	3795	—	—	—	—	—
1800	12.5×25	G25	0.015	0.038	3200	16×20	J20	0.015	0.038	3575	—	—	—	—	—
2200	12.5×30	G30	0.013	0.033	3795	12.5×35	G35	0.012	0.031	4120	—	—	—	—	—
2700	16×20	J20	0.015	0.038	3575	16×25	J25	0.013	0.035	3810	—	—	—	—	—
3300	12.5×35	G35	0.012	0.031	4120	—	—	—	—	—	—	—	—	—	—
—	16×25	J25	0.013	0.035	3810	—	—	—	—	—	—	—	—	—	—


(Note) Rated ripple current : 105°C, 100kHz ; Impedance : 100kHz

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

## 105°C Use, miniature, High-Reliability, Low ESR Capacitors

GREEN CAP Low ESR 105°C 8000hours Anti-cleaning solvent

- Smaller and higher ripple current than RJB series.
- Guarantees 8000 hours at 105°C.  
( $\phi 5$  to  $6.3$ : 2000 hours;  $\phi 8$ : 3000 hours;  $\phi 10$ : 5000 hours)

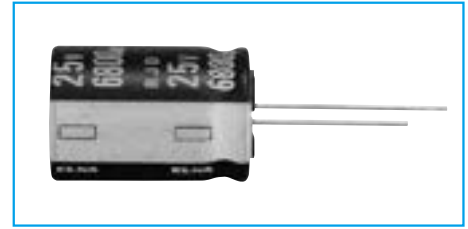

Marking color : White print on a black sleeve




### Specifications

Item	Performance																				
Category temperature range (°C)	-55 to +105																				
Tolerance at rated capacitance (%)	±20 (20°C, 120Hz)																				
Leakage current (µA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (µF), V : Rated voltage (V) (20°C)																				
Tangent of loss angle (tanδ)	<table border="1"> <thead> <tr> <th>Rated voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>80</th> <th>100</th> </tr> </thead> <tbody> <tr> <td>tanδ (max.)</td> <td>0.22</td> <td>0.19</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> <td>0.10</td> <td>0.08</td> <td>0.08</td> </tr> </tbody> </table> <p>0.02 is added to every 1000µF increase over 1000µF. (20°C, 120Hz)</p>	Rated voltage (V)	6.3	10	16	25	35	50	63	80	100	tanδ (max.)	0.22	0.19	0.16	0.14	0.12	0.10	0.10	0.08	0.08
Rated voltage (V)	6.3	10	16	25	35	50	63	80	100												
tanδ (max.)	0.22	0.19	0.16	0.14	0.12	0.10	0.10	0.08	0.08												
Characteristics at high and low temperature	<table border="1"> <thead> <tr> <th>Rated voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>80</th> <th>100</th> </tr> </thead> <tbody> <tr> <td>Impedance ratio (max.)</td> <td>Z-55°C/Z+20°C</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> </tr> </tbody> </table> <p>(120Hz)</p>	Rated voltage (V)	6.3	10	16	25	35	50	63	80	100	Impedance ratio (max.)	Z-55°C/Z+20°C	3	3	3	3	3	3	3	3
Rated voltage (V)	6.3	10	16	25	35	50	63	80	100												
Impedance ratio (max.)	Z-55°C/Z+20°C	3	3	3	3	3	3	3	3												
Endurance (105°C) (Applied ripple current)	<table border="1"> <thead> <tr> <th>Test time</th> <th>Test time</th> </tr> </thead> <tbody> <tr> <td><math>\phi 5</math> &amp; <math>6.3</math></td> <td>: 2000 hours</td> </tr> <tr> <td><math>\phi 8</math></td> <td>: 3000 hours</td> </tr> <tr> <td><math>\phi 10</math></td> <td>: 5000 hours</td> </tr> <tr> <td><math>\phi 12.5</math> or more</td> <td>: 8000 hours</td> </tr> <tr> <td>Leakage current</td> <td>The initial specified value or less</td> </tr> <tr> <td>Percentage of capacitance change</td> <td>Within ±20% of initial value</td> </tr> <tr> <td>Tangent of the loss angle</td> <td>200% or less of the initial specified value</td> </tr> </tbody> </table>	Test time	Test time	$\phi 5$ & $6.3$	: 2000 hours	$\phi 8$	: 3000 hours	$\phi 10$	: 5000 hours	$\phi 12.5$ or more	: 8000 hours	Leakage current	The initial specified value or less	Percentage of capacitance change	Within ±20% of initial value	Tangent of the loss angle	200% or less of the initial specified value				
Test time	Test time																				
$\phi 5$ & $6.3$	: 2000 hours																				
$\phi 8$	: 3000 hours																				
$\phi 10$	: 5000 hours																				
$\phi 12.5$ or more	: 8000 hours																				
Leakage current	The initial specified value or less																				
Percentage of capacitance change	Within ±20% of initial value																				
Tangent of the loss angle	200% or less of the initial specified value																				
Shelf life (105°C)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1																				
Applicable standards	JIS C5101 - 1,- 4 (IEC 60384 - 1,- 4)																				

### Outline Drawing

Unit : mm

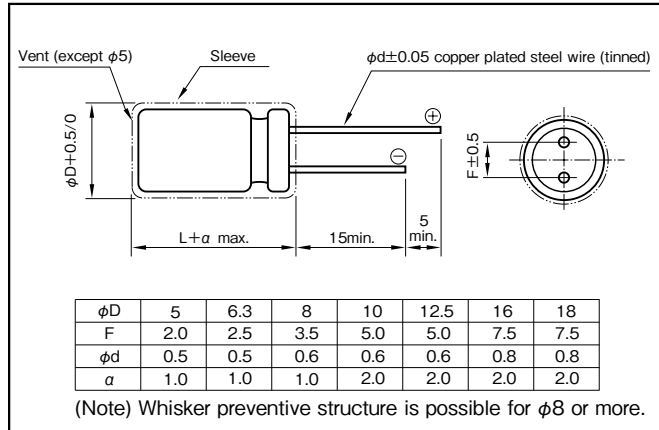

### Coefficient of Frequency for Rated Ripple Current

Rated Capacitance (µF)	50 · 60	120	300	1k	10k · 100k
56 or less	0.20	0.30	0.50	0.80	1
68 to 330	0.55	0.65	0.75	0.85	1
390 to 1000	0.70	0.75	0.80	0.90	1
1200 to 18000	0.80	0.85	0.90	0.95	1

### Product code system : 25V10000µF (\*For general product)

RS*	RJD	103	M	1T	K40		T
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Lead-forming and packing code	Additional code

- If it is whisker preventive structure, should change "T" into "G".
- For details, refer to the various "Product Code System" pages.

## Standard Ratings

Rated voltage(V) Item	6.3 (1J)					10 (1L)					16 (1E)				
	Case φD × L (mm)	Size code	ESR (Ω max.)		Rated ripple current (mA rms)	Case φD × L (mm)	Size code	ESR (Ω max.)		Rated ripple current (mA rms)	Case φD × L (mm)	Size code	ESR (Ω max.)		Rated ripple current (mA rms)
			20°C	-10°C				20°C	-10°C				20°C	-10°C	
22	—	—	—	—	—	—	—	—	—	—	5 × 11.5	C11	0.50	1.0	182
33	—	—	—	—	—	—	—	—	—	—	5 × 11.5	C11	0.50	1.0	182
47	—	—	—	—	—	—	—	—	—	—	5 × 11.5	C11	0.50	1.0	182
82	—	—	—	—	—	—	—	—	—	—	5 × 11.5	C11	0.50	1.0	182
100	—	—	—	—	—	5 × 11.5	C11	0.50	1.0	182	6.3 × 11.5	D11	0.25	0.50	295
150	5 × 11.5	C11	0.50	1.0	182	—	—	—	—	—	6.3 × 11.5	D11	0.25	0.50	295
180	—	—	—	—	—	6.3 × 11.5	D11	0.25	0.50	295	8 × 12	E12	0.117	0.234	567
220	—	—	—	—	—	6.3 × 11.5	D11	0.25	0.50	295	8 × 12	E12	0.117	0.234	567
330	6.3 × 11.5	D11	0.25	0.50	295	8 × 12	E12	0.117	0.234	567	8 × 12	E12	0.117	0.234	567
390	—	—	—	—	—	—	—	—	—	—	8 × 12	E12	0.117	0.234	567
470	8 × 12	E12	0.117	0.234	567	8 × 12	E12	0.117	0.234	567	8 × 15	E15	0.085	0.170	733
											10 × 12.5	F12	0.090	0.180	764
560	8 × 12	E12	0.117	0.234	567	8 × 12	E12	0.117	0.234	567	8 × 20	E20	0.065	0.130	996
680	8 × 12	E12	0.117	0.234	567	—	—	—	—	—	8 × 15	E15	0.085	0.170	733
											10 × 12.5	F12	0.090	0.180	764
820	—	—	—	—	—	8 × 15	E15	0.085	0.170	733	8 × 20	E20	0.065	0.130	996
						10 × 12.5	F12	0.090	0.180	764	10 × 16	F16	0.068	0.136	1060
1000	8 × 15	E15	0.085	0.170	733	8 × 20	E20	0.065	0.130	996	10 × 16	F16	0.068	0.136	1060
	10 × 12.5	F12	0.090	0.180	764	10 × 12.5	F12	0.090	0.180	764	10 × 20	F20	0.052	0.104	1230
1200	10 × 12.5	F12	0.090	0.180	764	8 × 20	E20	0.065	0.130	996	10 × 20	F20	0.052	0.104	1230
	10 × 16	F16	0.068	0.136	1060	10 × 16	F16	0.068	0.136	1060	10 × 25	F25	0.045	0.090	1450
1500	8 × 20	E20	0.065	0.130	996	10 × 20	F20	0.052	0.104	1230	10 × 25	F25	0.045	0.090	1450
	10 × 16	F16	0.068	0.136	1060	12.5 × 15	G15	0.062	0.124	1210	10 × 30	F30	0.035	0.070	1830
1800	12.5 × 15	G15	0.062	0.124	1210	10 × 20	F20	0.052	0.104	1230	—	—	—	—	—
						10 × 25	F25	0.045	0.090	1450					
2200	10 × 20	F20	0.052	0.104	1230	10 × 25	F25	0.045	0.090	1450	10 × 30	F30	0.035	0.070	1830
	10 × 25	F25	0.045	0.090	1450	12.5 × 20	G20	0.038	0.076	1700	12.5 × 20	G20	0.038	0.076	1700
											16 × 16	J16	0.043	0.086	1700
2700	10 × 25	F25	0.045	0.090	1450	10 × 30	F30	0.035	0.070	1830	12.5 × 25	G25	0.030	0.060	1950
						12.5 × 20	G20	0.038	0.076	1700	18 × 16	K16	0.038	0.076	2010
3300	10 × 30	F30	0.035	0.070	1830	12.5 × 25	G25	0.030	0.060	1950	12.5 × 30	G30	0.025	0.050	2330
	12.5 × 20	G20	0.038	0.076	1700						16 × 20	J20	0.029	0.058	2230
3900	12.5 × 25	G25	0.030	0.060	1950	12.5 × 25	G25	0.030	0.060	1950	12.5 × 35	G35	0.022	0.044	2620
						18 × 16	K16	0.038	0.076	2010	16 × 20	J20	0.029	0.058	2230
4700	12.5 × 25	G25	0.030	0.060	1950	12.5 × 30	G30	0.025	0.050	2330	12.5 × 40	G40	0.017	0.034	3160
	18 × 16	K16	0.038	0.076	2010	16 × 20	J20	0.029	0.058	2230	16 × 25	J25	0.022	0.044	2650
											18 × 20	K20	0.028	0.056	2500
5600	12.5 × 30	G30	0.025	0.050	2330	12.5 × 35	G35	0.022	0.044	2620	16 × 25	J25	0.022	0.044	2650
	16 × 20	J20	0.029	0.058	2230						16 × 31.5	J31	0.018	0.036	3210
6800	12.5 × 35	G35	0.022	0.044	2620	12.5 × 40	G40	0.017	0.034	3160	18 × 25	K25	0.020	0.040	3000
						16 × 25	J25	0.022	0.044	2650					
8200	12.5 × 40	G40	0.017	0.034	3160	16 × 31.5	J31	0.018	0.036	3210	18 × 35.5	K35	0.015	0.030	3960
	16 × 25	J25	0.022	0.044	2650										
	18 × 20	K20	0.028	0.056	2500	18 × 25	K25	0.020	0.040	3000					
10000	16 × 31.5	J31	0.018	0.036	3210	16 × 40	J40	0.015	0.030	3880	18 × 40	K40	0.014	0.028	4300
	18 × 25	K25	0.020	0.040	3000	18 × 35.5	K35	0.015	0.030	3960					
12000	18 × 25	K25	0.020	0.040	3000	—	—	—	—	—	—	—	—	—	—
15000	18 × 35.5	K35	0.015	0.030	3960	18 × 40	K40	0.014	0.028	4300	—	—	—	—	—
18000	18 × 40	K40	0.014	0.028	4300	—	—	—	—	—	—	—	—	—	—


(Note) Rated ripple current : 105°C, 100kHz ; ESR : 100kHz

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.



**For SRS AirBag** GREEN CAP 105°C 5000hours Anti-cleaning solvent For AirBag

- For SRS AirBag application
- Special tolerance at rated capacitance and high capacitance, and good low temperature behavior.
- Guarantees 5000 hours at 105°C.

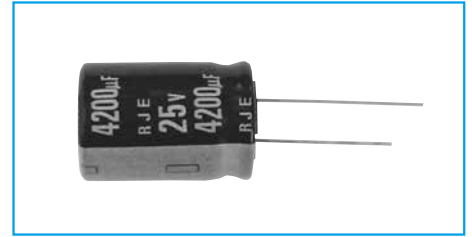


Marking color : White print on a black sleeve

## Specifications

Item	Performance		
Category temperature range (°C)	-55 to +105		
Tolerance at rated capacitance (%)	0 to +30 (20°C, 120Hz)		
Leakage current (µA) (max.)	0.01 CV (after 2 minutes) C : Rated capacitance (µF) , V : Rated voltage (V) (20°C)		
Tangent of loss angle (tanδ)	Rated voltage (V)	25	35
	tanδ (max.)	0.20	0.16
0.02 is added to every 1000µF increase over 1000µF (20°C, 120Hz)			
Characteristics at high and low temperature	Rated voltage (V)	25	35
	Impedance ratio (max.) Z-55°C/Z+20°C	3	3
(120Hz)			
Endurance (105°C)	Test time	5000 hours	
	Leakage current	The initial specified value or less	
	Percentage of capacitance change	Within ±30% of initial value	
	Tangent of loss angle	300% or less of the initial specified value	
Shelf life (105°C)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1		
Applicable standards	JIS C5101 - 1, - 4 (IEC 60384 - 1, - 4)		

## Outline Drawing

Unit : mm

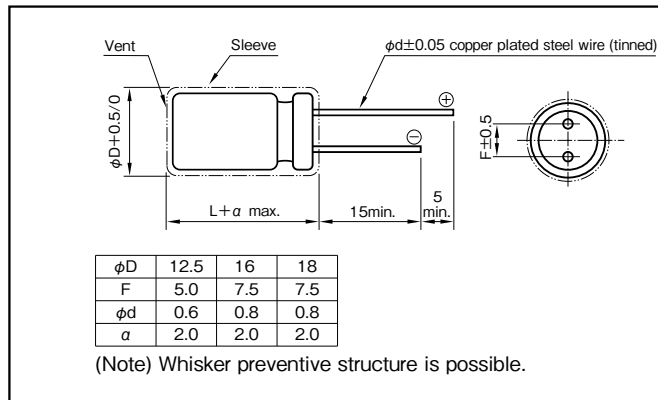

## Coefficient of Frequency for Rated Ripple Current

Frequency (Hz)	50 · 60	120	1k	10k·100k
Rated capacitance (µF)				
830 to 1100	0.70	0.75	0.90	1
1200 to 11000	0.80	0.85	0.95	1

Product code system : 25V4200µF  
(\*For automotive: powertrain, safety)

RA*	RJE	422	A	1T	G40		T
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Lead-forming and packing code	Additional code

- If it is whisker preventive structure, should change "T" into "G".
- For details, refer to the various "Product Code System" pages.

## Standard Ratings

Case size φD×L (mm)	Item Size code	Rated voltage(V)							
		Rated capacitance (µF)	25 (1T)		35 (1G)				
			ESR Ω (max.)		ESR Ω (max.)				
		20°C	-40°C	20°C	-40°C	Rated ripple current (mArms)			
12.5×15	G15	1100	0.174	0.52	1210	830	0.174	0.52	1210
12.5×20	G20	1800	0.107	0.27	1670	1300	0.107	0.27	1670
12.5×25	G25	2400	0.084	0.21	1950	1600	0.084	0.21	1950
12.5×30	G30	3200	0.070	0.18	2330	2200	0.070	0.18	2330
12.5×35	G35	3700	0.062	0.16	2620	2500	0.062	0.16	2620
12.5×40	G40	4200	0.048	0.12	3160	2900	0.048	0.12	3160
16×16	J16	2100	0.121	0.36	1700	1500	0.121	0.36	1700
16×20	J20	3100	0.082	0.21	2230	2100	0.082	0.21	2230
16×25	J25	4300	0.062	0.16	2650	3000	0.062	0.16	2650
16×31.5	J31	5800	0.051	0.13	3210	4000	0.051	0.13	3210
16×35.5	J35	6800	0.045	0.11	3570	4600	0.045	0.11	3570
16×40	J40	7800	0.042	0.11	3880	5300	0.042	0.11	3880
18×16	K16	3000	0.107	0.32	2010	2100	0.107	0.32	2010
18×20	K20	4300	0.079	0.20	2500	3000	0.079	0.20	2500
18×25	K25	6000	0.056	0.14	3000	4200	0.056	0.14	3000
18×31.5	K31	8000	0.045	0.11	3660	5600	0.045	0.11	3660
18×35.5	K35	9300	0.042	0.11	3960	6500	0.042	0.11	3960
18×40	K40	11000	0.040	0.10	4300	7400	0.040	0.10	4300

(Note) Rated ripple current : 105°C, 100kHz ; ESR : 100kHz

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.



For SRS AirBag



GREEN CAP

105°C  
5000hours

Anti-cleaning solvent

For AirBag

- For SRS AirBag application
- Special tolerance at rated capacitance and high capacitance, and good low temperature behavior.
- Guarantees 5000 hours at 105°C.

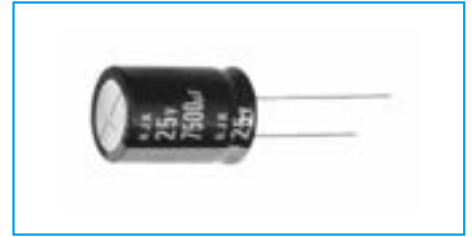


Marking color : White print on a black sleeve

### Specifications

Item	Performance		
Category temperature range (°C)	-55 to +105		
Tolerance at rated capacitance (%)	0 to +30 (20°C, 120Hz)		
Leakage current (µA) (max.)	0.01 CV (after 2 minutes) C : Rated capacitance (µF) , V : Rated voltage (V) (20°C)		
Tangent of loss angle (tanδ)	Rated voltage (V)	25	35
	tanδ (max.)	0.20	0.16
0.02 is added to every 1000µF increase over 1000µF (20°C, 120Hz)			
Characteristics at high and low temperature	Rated voltage (V)	25	35
	Impedance ratio (max.) Z-55°C/Z+20°C	3	3
(120Hz)			
Endurance (105°C)	Test time	5000 hours	
	Leakage current	The initial specified value or less	
	Percentage of capacitance change	Within ±30% of initial value	
	Tangent of loss angle	300% or less of the initial specified value	
Shelf life (105°C)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1		
Applicable standards	JIS C5101 - 1, - 4 (IEC 60384 - 1, - 4)		

### Outline Drawing

Unit : mm

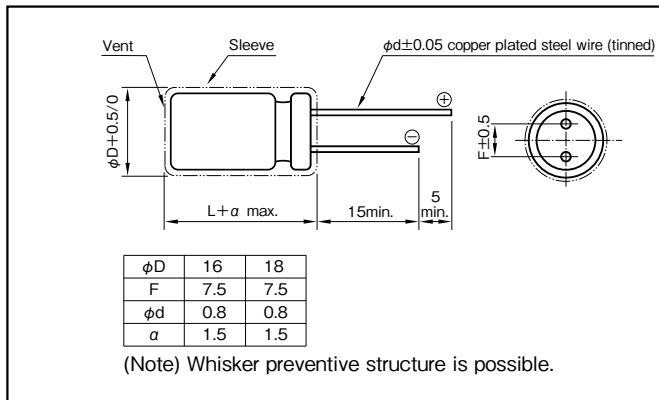

### Coefficient of Frequency for Rated Ripple Current

Frequency (Hz)	120	1k	10k	100k
Rated voltage (V)	120	1k	10k	100k
25, 35	0.80	0.85	0.95	1

Product code system : 25V4200µF  
(\*For automotive: powertrain, safety)

RA*	RJK	422	A	1T	J20		T
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Lead-forming and packing code	Additional code

- If it is whisker preventive structure, should change "T" into "G".
- For details, refer to the various "Product Code System" pages.

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

## Standard Ratings

Rated voltage (V)		25 (1T)				35 (1G)			
Case φD × L (mm)	Item Size code	Rated capacitance (μF)	ESR (Ω max.)		Rated ripple current (mA <sub>rms</sub> )	Rated capacitance (μF)	ESR (Ω max.)		Rated ripple current (mA <sub>rms</sub> )
			20°C	- 40°C			20°C	- 40°C	
			16 × 20	J20			4200	0.033	
18 × 20	K20	5300	0.029	0.082	2500	3100	0.029	0.082	2500
16 × 25	J25	5900	0.024	0.073	2600	3500	0.024	0.073	2600
18 × 25	K25	7500	0.022	0.063	2800	4500	0.022	0.063	2800
16 × 31.5	J31	8000	0.021	0.052	3200	4700	0.021	0.052	3200
18 × 31.5	K31	9500	0.019	0.046	3500	5600	0.019	0.046	3500
16 × 35.5	J35	10000	0.019	0.045	3500	6000	0.019	0.045	3500
18 × 35.5	K35	11000	0.017	0.040	3700	7100	0.017	0.040	3700
16 × 40	J40	11000	0.017	0.040	3800	6600	0.017	0.040	3800
18 × 40	K40	14000	0.015	0.035	4000	8400	0.015	0.035	4000

(Note) Rated ripple current : 105°C, 100kHz ; ESR : 100kHz

## 125°C Use, Miniature, Low ESR Capacitors

GREEN CAP

Low ESR


125°C 5000hours

Anti-cleaning solvent

- Smaller and low ESR than RK1 series.
- Guarantees 5000 hours at 125°C (2000 hours:  $\phi 8$ , 3000h:  $\phi 10$ ) (4000 hours: 63V to 100V -  $\phi 16 \times 20L$ )



Marking color : White print on a black sleeve




### Specifications

Item	Performance																		
Category temperature range (°C)	-40 to +125																		
Tolerance at rated capacitance (%)	±20 (20°C, 120Hz)																		
Leakage current (µA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (µF), V : Rated voltage (V) (20°C)																		
Tangent of loss angle (tanδ)	<table border="1"> <thead> <tr> <th>Rated voltage (V)</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>80</th> <th>100</th> </tr> </thead> <tbody> <tr> <td>tanδ (max.)</td> <td>0.20</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> <td>0.10</td> <td>0.08</td> <td>0.08</td> </tr> </tbody> </table> <p>0.02 is added to every 1000µF increase over 1000µF. (20°C, 120Hz)</p>	Rated voltage (V)	10	16	25	35	50	63	80	100	tanδ (max.)	0.20	0.16	0.14	0.12	0.10	0.10	0.08	0.08
Rated voltage (V)	10	16	25	35	50	63	80	100											
tanδ (max.)	0.20	0.16	0.14	0.12	0.10	0.10	0.08	0.08											
Characteristics at high and low temperature	<table border="1"> <thead> <tr> <th>Rated voltage (V)</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>80</th> <th>100</th> </tr> </thead> <tbody> <tr> <td>Impedance ratio (max.)</td> <td>Z-40°C/Z+20°C</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> </tr> </tbody> </table> <p>(120Hz)</p>	Rated voltage (V)	10	16	25	35	50	63	80	100	Impedance ratio (max.)	Z-40°C/Z+20°C	4	3	3	3	3	3	3
Rated voltage (V)	10	16	25	35	50	63	80	100											
Impedance ratio (max.)	Z-40°C/Z+20°C	4	3	3	3	3	3	3											
Endurance (125°C) (Applied ripple current)	<table border="1"> <thead> <tr> <th>Test time</th> <th>5000 hours (2000 hours: <math>\phi 8</math>, 3000h: <math>\phi 10</math>) (4000 hours: 63V to 100V - <math>\phi 16 \times 20L</math>)</th> </tr> </thead> <tbody> <tr> <td>Leakage current</td> <td>The initial specified value or less</td> </tr> <tr> <td>Percentage of capacitance change</td> <td>Within ±30% of initial value</td> </tr> <tr> <td>Tangent of the loss angle</td> <td>300% or less of the initial specified value</td> </tr> </tbody> </table>	Test time	5000 hours (2000 hours: $\phi 8$ , 3000h: $\phi 10$ ) (4000 hours: 63V to 100V - $\phi 16 \times 20L$ )	Leakage current	The initial specified value or less	Percentage of capacitance change	Within ±30% of initial value	Tangent of the loss angle	300% or less of the initial specified value										
Test time	5000 hours (2000 hours: $\phi 8$ , 3000h: $\phi 10$ ) (4000 hours: 63V to 100V - $\phi 16 \times 20L$ )																		
Leakage current	The initial specified value or less																		
Percentage of capacitance change	Within ±30% of initial value																		
Tangent of the loss angle	300% or less of the initial specified value																		
Shelf life (125°C)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1																		
Applicable standards	JIS C5101 - 1, - 4 (IEC 60384 - 1, - 4)																		

### Outline Drawing

Unit : mm

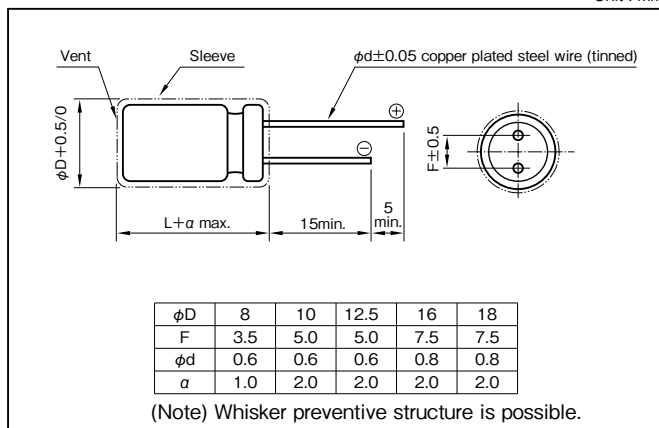

### Coefficient of Frequency for Rated Ripple Current

Rated capacitance (µF) \ Frequency (Hz)	50 · 60	120	1k	10k · 100k
100 to 330	0.55	0.65	0.85	1
390 to 1000	0.70	0.75	0.90	1
1200 to 6800	0.80	0.85	0.95	1

### Product code system : 10V1000µF (\*For general product)

RS*	RKD	102	M	1L	F20		T
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Lead-forming and packing code	Additional code

- If it is whisker preventive structure, should change "T" into "G".
- For details, refer to the various "Product Code System" pages.

NOTE : Design, Specifications are subject to change without notice. It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

## Standard Ratings

Rated voltage (V)	Item	10 (1L)				16 (1E)				25 (1T)				35 (1G)			
		Case φD × L (mm)	Size code	ESR ( Ω max.)	Rated ripple current (mArms)	Case φD × L (mm)	Size code	ESR ( Ω max.)	Rated ripple current (mArms)	Case φD × L (mm)	Size code	ESR ( Ω max.)	Rated ripple current (mArms)	Case φD × L (mm)	Size code	ESR ( Ω max.)	Rated ripple current (mArms)
100	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
220	8×12	E12	0.153	501	8×12	E12	0.153	501	8×12	E12	0.153	501	8×12	E12	0.153	501	
					10×12.5	F12	0.098	732	10×12.5	F12	0.098	732	10×12.5	F12	0.098	732	10×16
330	8×12	E12	0.153	501	8×12	E12	0.153	501	10×12.5	F12	0.098	732	10×16	F16	0.075	953	
	10×12.5	F12	0.098	732	10×12.5	F12	0.098	732	10×16	F16	0.075	953	10×20	F20	0.057	1140	
470	10×12.5	F12	0.098	732	10×16	F16	0.075	953	10×16	F16	0.075	953	10×20	F20	0.057	1140	
									12.5×20	G20	0.040	1820	12.5×25	G25	0.032	2400	12.5×30
1000	10×20	F20	0.057	1140	10×20	F20	0.057	1140	12.5×20	G20	0.040	1820	12.5×25	G25	0.032	2400	
	12.5×15	G15	0.059	1380	12.5×20	G20	0.040	1820	12.5×25	G25	0.032	2400	12.5×30	G30	0.029	2560	
1200	—	—	—	—	—	—	—	—	12.5×20	G20	0.040	1820	12.5×25	G25	0.032	2400	
									12.5×30	G30	0.029	2560	12.5×35	G35	0.023	2970	
1500	—	—	—	—	—	—	—	—	—	—	—	16×31.5	J31	0.020	3160		
												18×25	K25	0.022	3200		
1800	—	—	—	—	—	—	—	—	12.5×25	G25	0.032	2400	12.5×30	G30	0.029	2560	
									16×20	J20	0.032	2280	16×25	J25	0.024	3100	
2200	12.5×25	G25	0.032	2400	12.5×25	G25	0.032	2400	12.5×30	G30	0.029	2560	16×25	J25	0.024	3100	
	16×20	J20	0.032	2280	16×25	J25	0.024	3100	16×30	G30	0.029	2560	16×35.5	J35	0.019	3590	
2700	—	—	—	—	—	—	—	—	18×20	K20	0.029	2490	18×25	K25	0.022	3200	
									12.5×35	G35	0.023	2970	16×35.5	J35	0.019	3590	
3300	16×25	J25	0.024	3100	16×31.5	J31	0.020	3160	12.5×40	G40	0.020	3600	16×40	J40	0.017	4300	
	18×20	K20	0.029	2490	18×25	K25	0.022	3200	18×20	K20	0.029	2490	18×25	K25	0.022	3200	
3900	—	—	—	—	—	—	—	—	16×35.5	J35	0.019	3590	—	—	—	—	
									18×25	K25	0.022	3200	—	—	—	—	
4700	16×31.5	J31	0.020	3160	16×35.5	J35	0.019	3590	18×35.5	K35	0.017	4200	18×40	K40	0.016	4600	
	18×25	K25	0.022	3200	18×31.5	K31	0.018	3410	—	—	—	—	—	—	—		
5600	—	—	—	—	—	—	—	—	16×40	J40	0.017	4300	—	—	—	—	
6800	—	—	—	—	—	—	—	—	18×35.5	K35	0.017	4200	—	—	—	—	
									18×40	K40	0.016	4600	—	—	—	—	

Rated voltage (V)	Item	50 (1U)				63 (4E)				80 (1R)				100 (1H)			
		Case φD × L (mm)	Size code	ESR ( Ω max.)	Rated ripple current (mArms)	Case φD × L (mm)	Size code	ESR ( Ω max.)	Rated ripple current (mArms)	Case φD × L (mm)	Size code	ESR ( Ω max.)	Rated ripple current (mArms)	Case φD × L (mm)	Size code	ESR ( Ω max.)	Rated ripple current (mArms)
220	10×20	F20	0.081	960	—	—	—	—	—	—	—	—	16×20	J20	0.22	1100	
330	—	—	—	—	—	—	—	—	—	—	—	—	16×25	J25	0.12	1500	
470	12.5×20	G20	0.057	1500	—	—	—	—	16×20	J20	0.19	1200	16×35.5	J35	0.077	2000	
560	—	—	—	—	—	—	—	—	16×25	J25	0.11	1530	16×40	J40	0.069	2200	
820	12.5×30	G30	0.038	2150	16×31.5	J31	0.08	1910	18×25	K25	0.094	1640	18×40	K40	0.059	2330	
1000	16×25	J25	0.031	2620	16×35.5	J35	0.066	2110	18×35.5	K35	0.062	2180	—	—	—	—	
1800	18×31.5	K31	0.025	3140	18×40	K40	0.051	2470	18×40	K40	0.051	2470	—	—	—	—	
2200	18×35.5	K35	0.022	3510	—	—	—	—	—	—	—	—	—	—	—	—	

(Note) Rated ripple current : 125°C , 100kHz ; ESR : 20°C , 100kHz

## 135°C Use, Miniature, Low ESR Capacitors

GREEN CAP

Low ESR


135°C 3000hours

Anti-cleaning solvent

- High temperature guaranteed and low ESR series for automotive.
- Guarantees 3000 hours at 135°C.  
( $\phi 10$ , 63V to 100V : 2000 hours)



High temperature

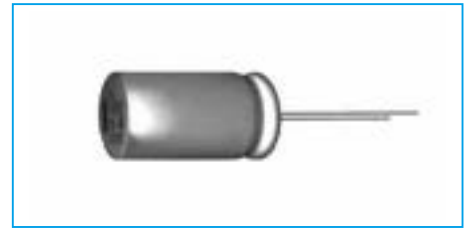


Marking color : Black print

### Specifications

Item	Performance
Category temperature range (°C)	-40 to +135
Tolerance at rated capacitance (%)	$\pm 20$ (20°C, 120Hz)
Leakage current ( $\mu A$ ) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance ( $\mu F$ ), V : Rated voltage (V) (20°C)
Tangent of loss angle ( $\tan\delta$ )	Rated voltage (V)
	$\tan\delta$ (max.)
Characteristics at high and low temperature	Rated voltage (V)
	Impedance ratio (max.)
Endurance (135°C) (Applied ripple current)	Test time
	Leakage current
	Percentage of capacitance change
	Tangent of the loss angle
Shelf life (135°C)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101 - 1, - 4 (IEC 60384 - 1, - 4)

### Outline Drawing

Unit : mm

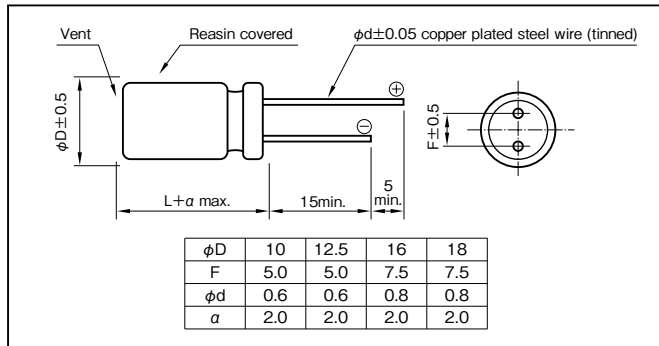

### Coefficient of Frequency for Rated Ripple Current

Rated capacitance ( $\mu F$ )	Frequency (Hz)			
	50 · 60	120	1k	10k · 100k
220 to 330	0.55	0.65	0.85	1
470 to 1000	0.70	0.75	0.90	1
1200 to 6800	0.80	0.85	0.95	1

Product code system : 10V1000 $\mu F$   
 (\*For automotive: powertrain, safety)

RA*	RKB	102	M	1L	F20		T
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Lead-forming and packing code	Additional code

For details, refer to the various "Product Code System" pages.

NOTE : Design, Specifications are subject to change without notice.  
 It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

## Standard Ratings

Rated voltage (V)	Item	10 (1L)				16 (1E)				25 (1T)				35 (1G)			
		Case φD × L (mm)	Size code	ESR (Ω max.)	Rated ripple current (mA rms)	Case φD × L (mm)	Size code	ESR (Ω max.)	Rated ripple current (mA rms)	Case φD × L (mm)	Size code	ESR (Ω max.)	Rated ripple current (mA rms)	Case φD × L (mm)	Size code	ESR (Ω max.)	Rated ripple current (mA rms)
220	—	—	—	—	10×12.5	F12	0.098	725	10×12.5	F12	0.098	725	10×12.5	F12	0.098	725	
													10×16	F16	0.075	951	
330	10×12.5	F12	0.098	725	10×12.5	F12	0.098	725	10×12.5	F12	0.098	725	10×16	F16	0.075	951	
									10×16	F16	0.075	951	10×20	F20	0.057	1130	
470	10×12.5	F12	0.098	725	10×16	F16	0.075	951	10×16	F16	0.075	951	10×20	F20	0.057	1130	
									10×20	F20	0.057	1130	12.5×20	G20	0.040	1550	
1000	10×20	F20	0.057	1130	10×20	F20	0.057	1130	12.5×20	G20	0.040	1550	12.5×25	G25	0.032	1880	
	12.5×15	G15	0.059	1130	12.5×20	G20	0.040	1550	12.5×25	G25	0.032	1880					
1200	—	—	—	—	—	—	—	—	12.5×20	G20	0.040	1550	12.5×30	G30	0.029	2160	
													16×20	J20	0.032	2020	
1500	—	—	—	—	—	—	—	—	—	—	—	—	12.5×35	G35	0.023	2580	
													16×31.5	J31	0.020	3040	
1800	—	—	—	—	—	—	—	—	12.5×25	G25	0.032	1880	12.5×40	G40	0.020	2920	
									16×20	J20	0.032	2020	16×25	J25	0.024	2550	
2200	12.5×25	G25	0.032	1880	12.5×25	G25	0.032	1880	12.5×30	G30	0.029	2160	16×31.5	J31	0.020	3040	
	16×20	J20	0.032	2020	16×25	J25	0.024	2550	16×25	J25	0.024	2550	16×35.5	J35	0.019	3280	
2700	—	—	—	—	—	—	—	—	12.5×35	G35	0.023	2580	16×35.5	J35	0.019	3280	
									16×25	J25	0.024	2550	18×31.5	K31	0.018	3410	
3300	16×25	J25	0.024	2550	16×31.5	J31	0.020	3040	12.5×40	G40	0.020	2920	16×40	J40	0.017	3630	
	18×20	K20	0.029	2320	18×25	K25	0.022	2880	16×31.5	J31	0.020	3040	18×35.5	K35	0.017	3710	
4700	16×31.5	J31	0.020	3040	16×35.5	J35	0.019	3280	16×35.5	J35	0.019	3280	18×40	K40	0.016	4000	
	18×25	K25	0.022	2880	18×31.5	K31	0.018	3410	18×31.5	K31	0.018	3410					
5600	—	—	—	—	—	—	—	—	16×40	J40	0.017	3630	—	—	—	—	
6800	—	—	—	—	—	—	—	—	18×40	K40	0.016	4000	—	—	—	—	

Rated voltage (V)	Item	50 (1U)				63 (4E)				80 (1R)				100 (1H)			
		Case φD × L (mm)	Size code	ESR (Ω max.)	Rated ripple current (mA rms)	Case φD × L (mm)	Size code	ESR (Ω max.)	Rated ripple current (mA rms)	Case φD × L (mm)	Size code	ESR (Ω max.)	Rated ripple current (mA rms)	Case φD × L (mm)	Size code	ESR (Ω max.)	Rated ripple current (mA rms)
220	—	10×20	F20	0.081	930	—	—	—	—	—	—	—	—	—	—	—	—
330	—	—	—	—	—	—	—	—	—	16×20	J20	0.19	1100	16×25	J25	0.12	1220
470	—	12.5×20	G20	0.057	1170	16×20	J20	0.19	1100	16×25	J25	0.11	1370	16×35.5	J35	0.077	1860
560	—	—	—	—	—	—	—	—	—	18×25	K25	0.094	1450	16×40	J40	0.069	2100
820	—	12.5×30	G30	0.038	1680	16×31.5	J31	0.080	1790	18×35.5	K35	0.062	2100	18×40	K40	0.059	2290
1000	—	16×25	J25	0.031	1710	16×35.5	J35	0.066	2010	18×40	K40	0.051	2350	—	—	—	—
1800	—	18×35.5	K31	0.025	2670	18×40	K40	0.051	2350	—	—	—	—	—	—	—	—
2200	—	18×35.5	K35	0.022	2900	—	—	—	—	—	—	—	—	—	—	—	—

(Note) Rated ripple current : 135°C , 100kHz ; ESR : 20°C , 100kHz

## 135°C Use, High CV, Low ESR Capacitors



GREEN CAP

Low ESR

135°C 3000hours

Anti-cleaning solvent

- High temperature guaranteed for automotive.
- Guaranteed 3000 hours at 135°C. (63V to 100V : 2000 hours)
- High CV, high ripple current.
- For ECU of Direct injection engine, ESP etc.

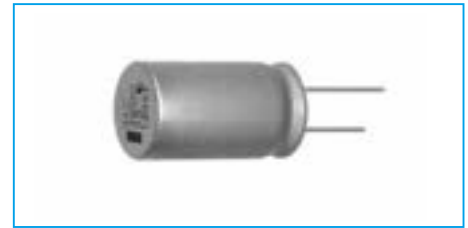


Marking color : Black print

### Specifications

Item	Performance														
Category temperature range (°C)	-40 to +135														
Tolerance at rated capacitance (%)	±20 (20°C, 120Hz)														
Leakage current (µA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (µF), V : Rated voltage (V) (20°C)														
Tangent of loss angle (tanδ)	<table border="1"> <thead> <tr> <th>Rated voltage (V)</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>80</th> <th>100</th> </tr> </thead> <tbody> <tr> <td>tanδ (max.)</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> <td>0.10</td> <td>0.08</td> <td>0.08</td> </tr> </tbody> </table>	Rated voltage (V)	25	35	50	63	80	100	tanδ (max.)	0.14	0.12	0.10	0.10	0.08	0.08
	Rated voltage (V)	25	35	50	63	80	100								
tanδ (max.)	0.14	0.12	0.10	0.10	0.08	0.08									
0.02 is added to every 1000µF increase over 1000µF. (20°C, 120Hz)															
Characteristics at high and low temperature	<table border="1"> <thead> <tr> <th>Rated voltage (V)</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>80</th> <th>100</th> </tr> </thead> <tbody> <tr> <td>Impedance ratio (max.) Z-40°C/Z+20°C</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> </tr> </tbody> </table>	Rated voltage (V)	25	35	50	63	80	100	Impedance ratio (max.) Z-40°C/Z+20°C	3	3	3	3	3	3
	Rated voltage (V)	25	35	50	63	80	100								
Impedance ratio (max.) Z-40°C/Z+20°C	3	3	3	3	3	3									
(120Hz)															
Endurance 1 (135°C) (Applied ripple current)	Test time	3000 hours (63V to 100V : 2000 hours)													
	Leakage current	The initial specified value or less													
	Percentage of capacitance change	Within ±30% of initial value													
	Tangent of the loss angle	300% or less of the initial specified value													
Endurance 2 (135°C) (Applied ripple current)	Test time	3000 hours (63V to 100V : 2000 hours)													
	Leakage current	The initial specified value or less													
	Percentage of capacitance change	Within ±30% of initial value													
	Tangent of the loss angle	300% or less of the initial specified value													
Shelf life (135°C)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1														
Applicable standards	JIS C5101 - 1, - 4 (IEC 60384 - 1, - 4)														

### Outline Drawing

Unit : mm

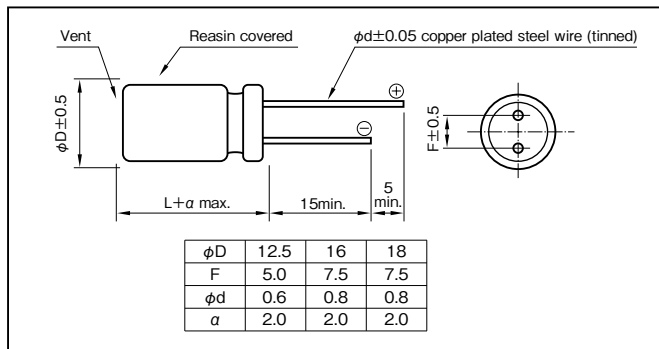

### Coefficient of Frequency for Rated Ripple Current

Rated capacitance (µF) \ Frequency (Hz)	50 · 60	120	1k	10k · 100k
160 to 360	0.55	0.65	0.85	1
390 to 1000	0.70	0.75	0.90	1
1100 to 12000	0.80	0.85	0.95	1

Product code system : 25V2000µF  
(\*For automotive: powertrain, safety)

RA*	RKC	202	M	1T	G20		T
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Lead-forming and packing code	Additional code

For details, refer to the various "Product Code System" pages.

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.






## 150°C Miniature Capacitors

GREEN CAP Low Impedance 150°C 1000hours Anti-cleaning solvent

- 150°C, High temperature guaranteed.
- Guarantees 1000 hours at 150°C.



High temperature

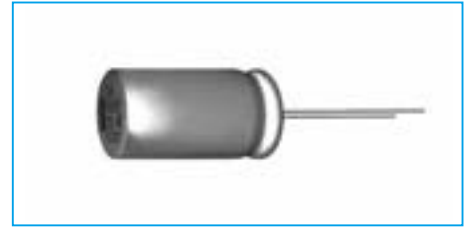


Marking color : Black print

### Specifications

Item	Performance											
Category temperature range (°C)	-40 to +150											
Tolerance at rated capacitance (%)	±20 (20°C, 120Hz)											
Leakage current (µA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (µF), V : Rated voltage (V) (20°C)											
Tangent of loss angle (tanδ)	<table border="1"> <thead> <tr> <th>Rated voltage (V)</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> </tr> </thead> <tbody> <tr> <td>tanδ (max.)</td> <td>0.20</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> </tr> </tbody> </table> <p>0.02 is added to every 1000µF increase over 1000µF. (20°C, 120Hz)</p>	Rated voltage (V)	10	16	25	35	tanδ (max.)	0.20	0.16	0.14	0.12	
Rated voltage (V)	10	16	25	35								
tanδ (max.)	0.20	0.16	0.14	0.12								
Characteristics at high and low temperature	<table border="1"> <thead> <tr> <th>Rated voltage (V)</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> </tr> </thead> <tbody> <tr> <td>Impedance ratio (max.)</td> <td>Z-40°C/Z+20°C</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> </tr> </tbody> </table> <p>(120Hz)</p>	Rated voltage (V)	10	16	25	35	Impedance ratio (max.)	Z-40°C/Z+20°C	4	3	3	3
Rated voltage (V)	10	16	25	35								
Impedance ratio (max.)	Z-40°C/Z+20°C	4	3	3	3							
Endurance (150°C) (Applied ripple current)	<table border="1"> <tbody> <tr> <td>Test time</td> <td>1000 hours</td> </tr> <tr> <td>Leakage current</td> <td>The initial specified value or less</td> </tr> <tr> <td>Percentage of capacitance change</td> <td>Within ±30% of initial value</td> </tr> <tr> <td>Tangent of the loss angle</td> <td>300% or less of the initial specified value</td> </tr> </tbody> </table>	Test time	1000 hours	Leakage current	The initial specified value or less	Percentage of capacitance change	Within ±30% of initial value	Tangent of the loss angle	300% or less of the initial specified value			
Test time	1000 hours											
Leakage current	The initial specified value or less											
Percentage of capacitance change	Within ±30% of initial value											
Tangent of the loss angle	300% or less of the initial specified value											
Shelf life (150°C)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1											
Applicable standards	JIS C5101 - 1, - 4 (IEC 60384 - 1, - 4)											

### Outline Drawing

Unit : mm

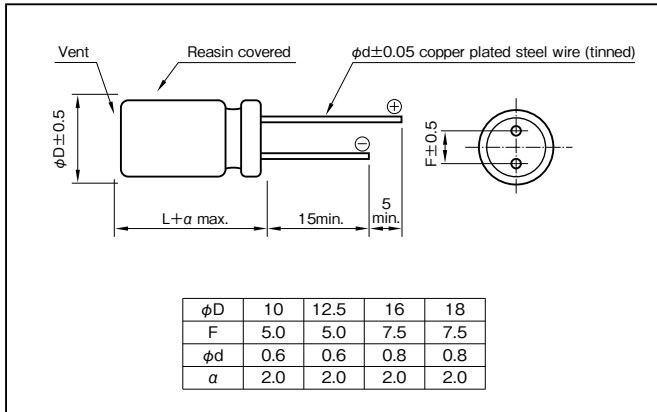

### Coefficient of Frequency for Rated Ripple Current

Rated capacitance (µF)	50 · 60	120	1k	10k · 100k
220 to 330	0.55	0.65	0.85	1
470 to 1000	0.70	0.75	0.90	1
2200 to 4700	0.80	0.85	0.95	1

Product code system : 35V1000µF (\*For general product)

RS*	RQA	102	M	1G	G26		T
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Lead-forming and packing code	Additional code

For details, refer to the various "Product Code System" pages.

### Standard Ratings

Rated voltage (V)	Item	10 (1L)			16 (1E)			25 (1T)			35 (1G)		
		Case φD×L (mm)	Size code	Rated ripple current (mArms)	Case φD×L (mm)	Size code	Rated ripple current (mArms)	Case φD×L (mm)	Size code	Rated ripple current (mArms)	Case φD×L (mm)	Size code	Rated ripple current (mArms)
220		—	—	—	—	—	—	10×14.5	F14	300	10×14.5	F14	300
330		—	—	—	—	—	—	10×18	F18	510	10×18	F18	510
470		—	—	—	10×18	F18	510	10×22	F22	820	10×22	F22	820
1000		10×22	F22	820	10×22	F22	820	12.5×26	G26	1000	12.5×26	G26	1000
2200		12.5×26	G26	1000	12.5×26	G26	1000	16×26.5	J26	1200	16×33	J33	1370
3300		16×26.5	J26	1200	16×33	J33	1370	16×37	J37	1720	18×34	K34	1670
4700		16×33	J33	1370	16×37	J37	1720	18×38	K38	1790	18×42.5	K42	1870


(Note) Rated ripple current : 150°C , 100kHz

NOTE : Design, Specifications are subject to change without notice. It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.



## 150°C Miniature Capacitors

GREEN CAP    LOW ESR    150°C 2000hours    Anti-cleaning solvent

- 150°C, High temperature guaranteed.
- Guaranteed 2000 hours at 150°C.



High ripple  
Long life

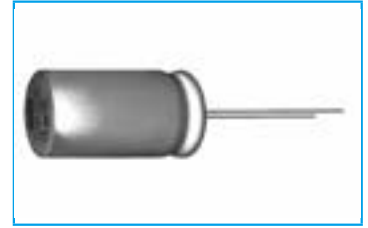


Marking color : Black print

### Specifications

Item	Performance	
Category temperature range (°C)	- 40 to + 150	
Tolerance at rated capacitance (%)	± 20 (20°C, 120Hz)	
Leakage current (µA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (µF) ; V : Rated voltage (V) (20°C)	
Tangent of loss angle (tan δ)	Rated voltage (V)	35                      50
	tan δ (max.)	0.12                      0.10
0.02 is added to every 1000µF increase over 1000µF (20°C, 120Hz)		
Characteristics at high and low temperature	Rated voltage (V)	35                      50
	Impedance ratio (max.)   Z - 40°C / Z + 20°C	3                              3
(120Hz)		
Endurance (105°C) (Applied ripple current)	Test time	2000 hours
	Leakage current	The initial specified value or less
	Percentage of capacitance change	Within ± 30% of initial value
	Tangent of the loss angle	300% or less of the initial specified value
Shelf life (150°C)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1	
Applicable standards	JIS C5101-1, -4 (IEC 60384-1, -4)	

### Outline Drawing

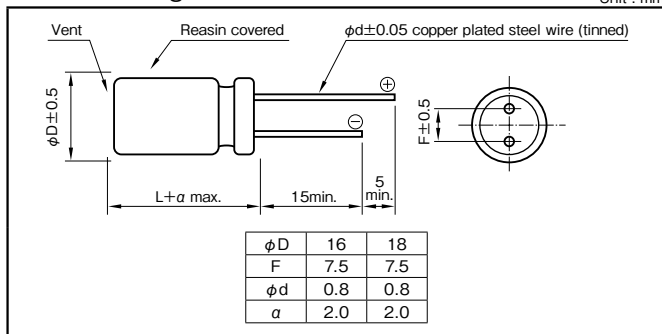

### Coefficient of Frequency for Rated Ripple Current

Rated capacitance (µF) 1300 to 4700	Frequency (Hz)			
	120	1k	10k	100k
	0.85	0.95	1.00	1

Product code system : 35V2200µF (\*For general product)

RS*	RQB	222	M	1G	J26		T
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Lead-forming and packing code	Additional code

For details, refer to the various "Product Code System" pages.

### Standard Ratings

Case size φD×L (mm)	Size code	Rated voltage (V)	35 (1G)				50 (1U)			
			Rated capacitance (µF)	ESR (Ω max.)		Rated ripple current (mArms)	Rated capacitance (µF)	ESR (Ω max.)		Rated ripple current (mArms)
				20°C	- 40°C			20°C	- 40°C	
16 × 26.5	J26	2200	0.038	0.380	1800	1300	0.040	0.400	1800	
16 × 33	J33	2700	0.032	0.320	2200	1800	0.038	0.380	2200	
16 × 37	J37	3000	0.030	0.300	2600	2000	0.032	0.320	2600	
16 × 41.5	J41	3600	0.027	0.270	3000	2400	0.029	0.290	3000	
18 × 27.5	K27	2400	0.036	0.360	2200	1800	0.034	0.340	2200	
18 × 34	K34	3300	0.028	0.280	2800	2400	0.030	0.300	2700	
18 × 42.5	K42	4700	0.023	0.230	3600	3000	0.023	0.230	3700	

(Note) Rated ripple current : 150°C, 100kHz ; ESR : 100kHz

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

**For Vibration, Resistance,  
Miniature Aluminum Electrolytic Capacitors**


## 125°C Use, Long Life Capacitors

<b>GREEN CAP</b>	Vibration Resistance	Low ESR	125°C 5000hours	Anti-cleaning solvent
------------------	----------------------	---------	-----------------	-----------------------

- Guarantees 5000 hours at 125°C. (4000 hours: 63V to 100V - φ16x20L)
- Best-suited to smoothing circuits and control circuits for industrial equipment power supplies of which long life and high reliability are required.
- NC terminal added items are lineup for vibration resistance. (30G guaranteed : 20mmL or less)



Marking color : White print on a black sleeve




### Specifications

Item	Performance																		
Category temperature range (°C)	-40 to +125																		
Tolerance at rated capacitance (%)	±20 (20°C, 120Hz)																		
Leakage current (μA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (μF), V : Rated voltage (V) (20°C)																		
Tangent of loss angle (tanδ)	<table border="1"> <tr> <td>Rated voltage (V)</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>80</td> <td>100</td> </tr> <tr> <td>tanδ (max.)</td> <td>0.20</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> <td>0.10</td> <td>0.08</td> <td>0.08</td> </tr> </table> <p>0.02 is added to every 1000μF increase over 1000μF. (20°C, 120Hz)</p>	Rated voltage (V)	10	16	25	35	50	63	80	100	tanδ (max.)	0.20	0.16	0.14	0.12	0.10	0.10	0.08	0.08
Rated voltage (V)	10	16	25	35	50	63	80	100											
tanδ (max.)	0.20	0.16	0.14	0.12	0.10	0.10	0.08	0.08											
Characteristics at high and low temperature	<table border="1"> <tr> <td>Rated voltage (V)</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>80</td> <td>100</td> </tr> <tr> <td>Impedance ratio (max.)</td> <td>Z-40°C/Z+20°C</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> </tr> </table> <p>(120Hz)</p>	Rated voltage (V)	10	16	25	35	50	63	80	100	Impedance ratio (max.)	Z-40°C/Z+20°C	4	3	3	3	3	3	3
Rated voltage (V)	10	16	25	35	50	63	80	100											
Impedance ratio (max.)	Z-40°C/Z+20°C	4	3	3	3	3	3	3											
Endurance (125°C) (Applied ripple current)	<table border="1"> <tr> <td>Test time</td> <td>5000 hours (4000 hours: 63V to 100V - φ16x20L)</td> </tr> <tr> <td>Leakage current</td> <td>The initial specified value or less</td> </tr> <tr> <td>Percentage of capacitance change</td> <td>Within ±30% of initial value</td> </tr> <tr> <td>Tangent of the loss angle</td> <td>300% or less of the initial specified value</td> </tr> </table>	Test time	5000 hours (4000 hours: 63V to 100V - φ16x20L)	Leakage current	The initial specified value or less	Percentage of capacitance change	Within ±30% of initial value	Tangent of the loss angle	300% or less of the initial specified value										
Test time	5000 hours (4000 hours: 63V to 100V - φ16x20L)																		
Leakage current	The initial specified value or less																		
Percentage of capacitance change	Within ±30% of initial value																		
Tangent of the loss angle	300% or less of the initial specified value																		
Shelf life (125°C)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1																		
Applicable standards	JIS C5101 - 1, - 4 (IEC 60384 - 1, - 4)																		

### Outline Drawing

Unit : mm

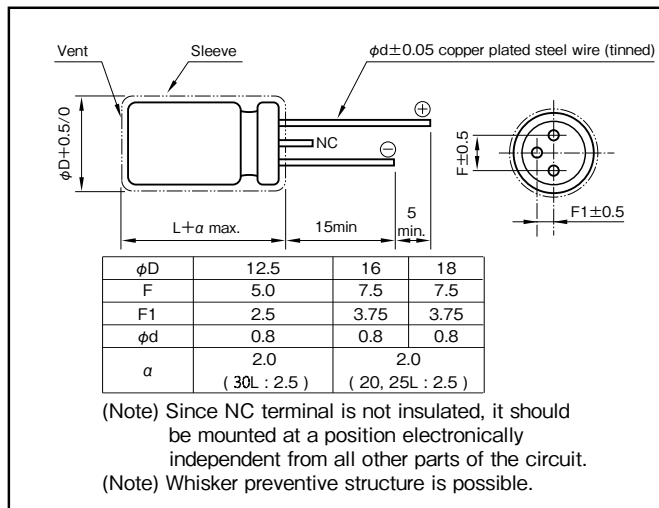

### Coefficient of Frequency for Rated Ripple Current

Rated capacitance (μF) \ Frequency (Hz)	50 · 60	120	1k	10k · 100k
220 to 330	0.55	0.65	0.85	1
390 to 1000	0.70	0.75	0.90	1
1200 to 6800	0.80	0.85	0.95	1

### Product code system : 16V2200μF (\*For general product)

RS*	RPK	222	M	1E	J25		DT
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Lead-forming and packing code	Additional code

- If it is whisker preventive structure, should change "T" into "G".
- For details, refer to the various "Product Code System" pages.

NOTE : Design, Specifications are subject to change without notice.  
 It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

## Standard Ratings

Rated voltage (V)	Item	10 (1L)				16 (1E)				25 (1T)				35 (1G)														
		Case φD × L (mm)	Size code	ESR (Ω max.)	Rated ripple current (mA rms)	Case φD × L (mm)	Size code	ESR (Ω max.)	Rated ripple current (mA rms)	Case φD × L (mm)	Size code	ESR (Ω max.)	Rated ripple current (mA rms)	Case φD × L (mm)	Size code	ESR (Ω max.)	Rated ripple current (mA rms)											
470	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—											
1000	12.5×15	G15	0.059	1380	12.5×20	G20	0.040	1820	12.5×20	G20	0.040	1820	12.5×25	G25	0.032	2400	12.5×25	G25	0.032	2400								
					16×16	J16	0.044	1930	12.5×25	G25	0.032	2400	16×25	J25	0.024	3100	16×25	J25	0.024	3100								
					16×16	J16	0.044	1930	16×25	J25	0.024	3100	16×25	J25	0.024	3100	18×20	K20	0.029	2490	18×20	K20	0.029	2490				
1200	—	—	—	—	—	—	—	—	12.5×20	G20	0.040	1820	12.5×30	G30	0.029	2560	12.5×30	G30	0.029	2560								
1500	—	—	—	—	—	—	—	—	—	—	—	—	16×20	J20	0.032	2280	16×20	J20	0.032	2280								
													12.5×35	G35	0.023	2970	16×20	J20	0.032	2280	12.5×35	G35	0.023	2970	16×20	J20	0.032	2280
													16×31.5	J31	0.020	3160	16×31.5	J31	0.020	3160	16×31.5	J31	0.020	3160	16×31.5	J31	0.020	3160
1800	—	—	—	—	—	—	—	—	—	—	—	—	18×25	K25	0.022	3200	18×25	K25	0.022	3200								
													12.5×25	G25	0.032	2400	12.5×25	G25	0.032	2400	12.5×25	G25	0.032	2400	12.5×25	G25	0.032	2400
													16×20	J20	0.032	2280	16×20	J20	0.032	2280	16×20	J20	0.032	2280	16×20	J20	0.032	2280
2200	12.5×25	G25	0.032	2400	12.5×25	G25	0.032	2400	12.5×30	G30	0.029	2560	12.5×30	G30	0.029	2560	16×25	J25	0.024	3100								
					16×20	J20	0.032	2280	16×25	J25	0.024	3100	16×25	J25	0.024	3100	16×25	J25	0.024	3100								
					18×16	K16	0.041	2170	18×20	K20	0.029	2490	18×20	K20	0.029	2490	18×20	K20	0.029	2490	18×20	K20	0.029	2490				
2700	—	—	—	—	—	—	—	—	—	—	—	—	12.5×35	G35	0.023	2970	12.5×35	G35	0.023	2970								
													16×25	J25	0.024	3100	16×25	J25	0.024	3100	16×25	J25	0.024	3100	16×25	J25	0.024	3100
													18×20	K20	0.029	2490	18×20	K20	0.029	2490	18×20	K20	0.029	2490	18×20	K20	0.029	2490
3300	16×25	J25	0.024	3100	16×31.5	J31	0.020	3160	12.5×40	G40	0.020	3600	12.5×40	G40	0.020	3600	16×40	J40	0.017	4300								
	18×20	K20	0.029	2490	18×25	K25	0.022	3200	16×31.5	J31	0.020	3160	16×31.5	J31	0.020	3160	16×31.5	J31	0.020	3160								
3900	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—									
	16×31.5	J31	0.020	3160	16×31.5	J31	0.020	3160	16×31.5	J31	0.020	3160	16×31.5	J31	0.020	3160	16×31.5	J31	0.020	3160								
4700	18×25	K25	0.022	3200	18×31.5	K31	0.018	3410	18×35.5	K35	0.017	4200	18×35.5	K35	0.017	4200	18×40	K40	0.016	4600								
	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—									
5600	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—									
6800	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—									



Rated voltage (V)	Item	50 (1U)				63 (4E)				80 (1R)				100 (1H)			
		Case φD × L (mm)	Size code	ESR (Ω max.)	Rated ripple current (mA rms)	Case φD × L (mm)	Size code	ESR (Ω max.)	Rated ripple current (mA rms)	Case φD × L (mm)	Size code	ESR (Ω max.)	Rated ripple current (mA rms)	Case φD × L (mm)	Size code	ESR (Ω max.)	Rated ripple current (mA rms)
220	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
330	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
470	12.5×20	G20	0.070	1500	—	—	—	—	16×25	J25	0.116	1500	16×25	J25	0.127	1460	
560	—	—	—	—	—	—	—	—	18×25	K25	0.100	1600	16×40	J40	0.069	2200	
820	12.5×30	G30	0.038	2150	16×31.5	J31	0.080	1910	18×35.5	K35	0.062	2180	18×40	K40	0.059	2330	
1000	16×25	J25	0.031	2620	16×35.5	J35	0.066	2110	18×40	K40	0.051	2470	—	—	—	—	
1800	18×31.5	K31	0.025	3140	—	—	—	—	—	—	—	—	—	—	—	—	
2200	18×35.5	K35	0.022	3510	—	—	—	—	—	—	—	—	—	—	—	—	

(Note) Rated ripple current : 125°C, 100kHz ; ESR : 20°C, 100kHz

## 125°C Use, Miniature, Low ESR, High Vibration Resistance Capacitors

GREEN CAP	High Vibration Resistance	Low ESR	125°C 5000hours	Anti-cleaning solvent
-----------	---------------------------	---------	-----------------	-----------------------

- Vibration resistance (40G,10 to 2000Hz, X,Y,Z = per 2hours).
- For Automotive application (ABS and electric power steering etc.)
- Guaranteed 5000 hours at 125°C

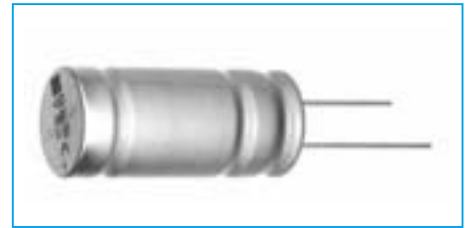


Marking color : Black print

### Specifications

Item	Performance								
Category temperature range (°C)	-40 to +125								
Tolerance at rated capacitance (%)	±20 (20°C,120Hz)								
Leakage current (µA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (µF), V : Rated voltage (V) (20°C)								
Tangent of loss angle (tanδ)	<table border="1"> <tr> <td>Rated voltage (V)</td> <td>25</td> <td>35</td> <td>50</td> </tr> <tr> <td>tanδ (max.)</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> </tr> </table>	Rated voltage (V)	25	35	50	tanδ (max.)	0.14	0.12	0.10
	Rated voltage (V)	25	35	50					
tanδ (max.)	0.14	0.12	0.10						
0.02 is added to every 1000µF increase over 1000µF. (20°C,120Hz)									
Characteristics at high and low temperature	<table border="1"> <tr> <td>Rated voltage (V)</td> <td>25</td> <td>35</td> <td>50</td> </tr> <tr> <td>Impedance ratio (max.)</td> <td>Z-40°C/Z+20°C</td> <td>3</td> <td>3</td> </tr> </table>	Rated voltage (V)	25	35	50	Impedance ratio (max.)	Z-40°C/Z+20°C	3	3
	Rated voltage (V)	25	35	50					
Impedance ratio (max.)	Z-40°C/Z+20°C	3	3						
(120Hz)									
Endurance (125°C) (Applied ripple current)	Test time	5000 hours							
	Leakage current	The initial specified value or less							
	Percentage of capacitance change	Within ±30% of initial value							
	Tangent of the loss angle	300% or less of the initial specified value							
Shelf life (125°C)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1								
Vibration	Vibration test condition								
	Frequency range	10 to 2000Hz							
	Amplitude or Acceleration	1.5 mm peak to peak or 40G (392m/s <sup>2</sup> ), whichever is the less severe							
	Sweep rate	0.5 octave/min.							
	Vibration axis and duration	X, Y, Z per 2 hours, total 6 hours							
	Fixation	Capacitor mounted by its body which is rigidly clamped to the work surface.							
Specification after test									
Leakage current	The initial specified value or less								
Percentage of capacitance change	Within ±30% of initial value								
Tangent of the loss angle	300% or less of the initial specified value								
Applicable standards	JIS C5101 - 1, - 4 (IEC 60384 - 1, - 4)								

### Outline Drawing

Unit : mm

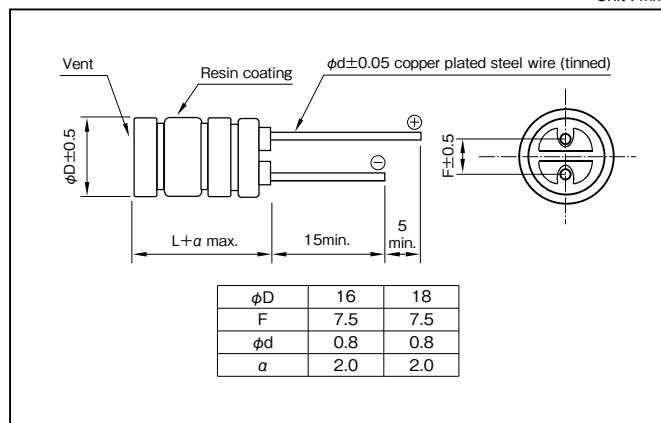

### Coefficient of Frequency for Rated Ripple Current

Rated capacitance (µF)	Frequency (Hz)	120	1k	10k	100k
1200 to 6800		0.85	0.95	1.00	1

Product code system : 35V2700µF  
(\*For automotive: powertrain, safety)

RA*	RKE	272	M	1G	K31		T
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Lead-forming and packing code	Additional code

For details, refer to the various "Product Code System" pages.

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

## Standard Ratings



Rated voltage(V) Item Rated capacitance ( $\mu$ F)	25 (1T)					35 (1G)					50 (1U)				
	Case $\phi$ D $\times$ L (mm)	Size code	ESR ( $\Omega$ max.)		Rated ripple current (mA rms)	Case $\phi$ D $\times$ L (mm)	Size code	ESR ( $\Omega$ max.)		Rated ripple current (mA rms)	Case $\phi$ D $\times$ L (mm)	Size code	ESR ( $\Omega$ max.)		Rated ripple current (mA rms)
			20°C	-40°C				20°C	-40°C				20°C	-40°C	
1200	—	—	—	—	—	—	—	—	—	—	16 $\times$ 31.5	J31	0.048	0.20	2940
1500	—	—	—	—	—	16 $\times$ 31.5	J31	0.024	0.14	3160	16 $\times$ 35.5	J35	0.039	0.16	3300
2200	—	—	—	—	—	16 $\times$ 35.5	J35	0.023	0.13	3590	18 $\times$ 35.5	K35	0.033	0.15	3520
2700	16 $\times$ 31.5	J31	0.024	0.14	3160	18 $\times$ 31.5	K31	0.020	0.11	3410	—	—	—	—	—
3300	16 $\times$ 35.5	J35	0.023	0.13	3590	18 $\times$ 35.5	K35	0.019	0.10	3840	—	—	—	—	—
4700	18 $\times$ 31.5	K31	0.020	0.11	3410	18 $\times$ 40	K40	0.017	0.094	4250	—	—	—	—	—
5600	18 $\times$ 35.5	K35	0.019	0.10	3840	—	—	—	—	—	—	—	—	—	—
6800	18 $\times$ 40	K40	0.017	0.094	4250	—	—	—	—	—	—	—	—	—	—

(Note) Rated ripple current : 125°C , 100kHz ; ESR : 100kHz

### 135°C Use, Miniature, Low ESR, High Vibration Resistance Capacitors

GREEN CAP	High Vibration Resistance	Low ESR	135°C 3000hours	Anti-cleaning solvent
-----------	---------------------------	---------	-----------------	-----------------------

- Vibration resistance (40G, 10 to 2000Hz, X, Y, Z = per 2 hours).
- For Automotive application (ABS and electric power steering etc.)
- Guaranteed 3000 hours at 135°C (63V to 100V : Guaranteed 2000 hours)

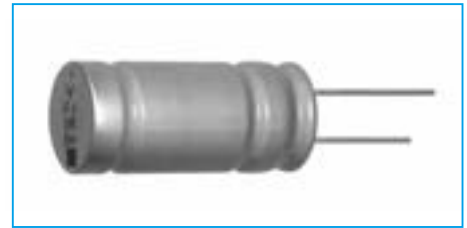


Marking color : Black print

### Specifications

Item	Performance														
Category temperature range (°C)	-40 to +135														
Tolerance at rated capacitance (%)	±20 (20°C, 120Hz)														
Leakage current (μA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (μF), V : Rated voltage (V) (20°C)														
Tangent of loss angle (tanδ)	<table border="1"> <tr> <th>Rated voltage (V)</th> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>80</td> <td>100</td> </tr> <tr> <th>tanδ (max.)</th> <td>0.14</td> <td>0.12</td> <td>0.10</td> <td>0.10</td> <td>0.08</td> <td>0.08</td> </tr> </table>	Rated voltage (V)	25	35	50	63	80	100	tanδ (max.)	0.14	0.12	0.10	0.10	0.08	0.08
	Rated voltage (V)	25	35	50	63	80	100								
tanδ (max.)	0.14	0.12	0.10	0.10	0.08	0.08									
0.02 is added to every 1000μF increase over 1000μF. (20°C, 120Hz)															
Characteristics at high and low temperature	<table border="1"> <tr> <th>Rated voltage (V)</th> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>80</td> <td>100</td> </tr> <tr> <th>Impedance ratio (max.)</th> <td>Z-40°C/Z+20°C</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> </tr> </table>	Rated voltage (V)	25	35	50	63	80	100	Impedance ratio (max.)	Z-40°C/Z+20°C	3	3	3	3	3
	Rated voltage (V)	25	35	50	63	80	100								
Impedance ratio (max.)	Z-40°C/Z+20°C	3	3	3	3	3									
(120Hz)															
Endurance (135°C or 125°C) (Applied ripple current)	Test time	3000 hours (63V to 100V : 2000 hours)													
	Leakage current	The initial specified value or less													
	Percentage of capacitance change	Within ±30% of initial value													
	Tangent of the loss angle	300% or less of the initial specified value													
Shelf life (135°C)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1														
Vibration	Vibration test condition														
	Frequency range	10 to 2000Hz													
	Amplitude or Acceleration	1.5 mm peak to peak or 40G (392m/s <sup>2</sup> ), whichever is the less severe													
	Sweep rate	0.5 octave/min.													
	Vibration axis and duration	X, Y, Z per 2 hours, total 6 hours													
	Fixation	Capacitor mounted by its body which is rigidly clamped to the work surface.													
Specification after test															
Leakage current	The initial specified value or less														
Percentage of capacitance change	Within ±30% of initial value														
Tangent of the loss angle	300% or less of the initial specified value														
Applicable standards	JIS C5101 - 1, - 4 (IEC 60384 - 1, - 4)														

### Outline Drawing

Unit : mm

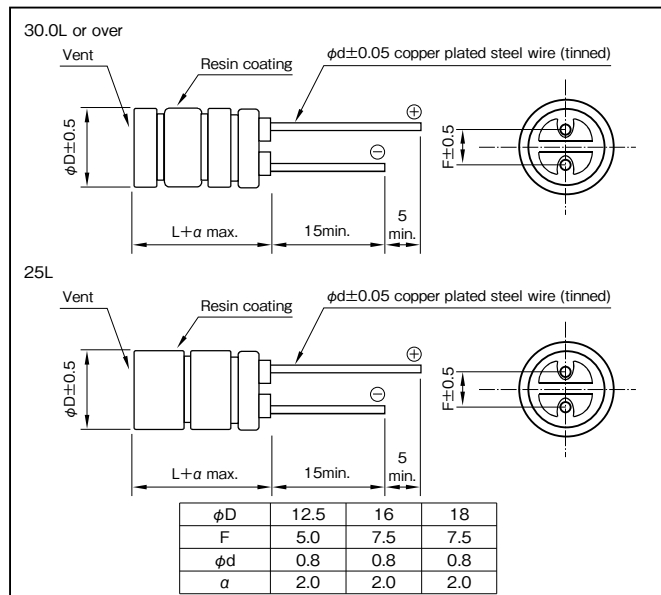

### Coefficient of Frequency for Rated Ripple Current

Rated capacitance (μF) \ Frequency (Hz)	120	1k	10k	100k
180 to 330	0.65	0.85	1.00	1
390 to 1000	0.75	0.90	1.00	1
1100 to 8200	0.85	0.95	1.00	1

Product code system : 35V3600μF  
(\*For automotive: powertrain, safety)

RA*	RKF	362	M	1G	K31		T
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Lead-forming and packing code	Additional code

For details, refer to the various "Product Code System" pages.

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.



## Standard Ratings

Rated voltage (V)	Rated capacitance (μF)	Case φD × L (mm)	Size code	ESR (Ω max. / 100kHz)		Rated ripple current (mA rms / 100kHz)	
				20°C	-40°C	135°C	125°C
				25 (1T)			
0.028	0.24	2900	4490				
0.025	0.21	3190	5140				
0.024	0.19	3470	5810				
0.023	0.18	3400	5480				
0.020	0.14	3630	6070				
0.019	0.12	3930	6810				
0.022	0.16	3470	5600				
0.019	0.12	3750	6280				
0.018	0.10	4080	7070				
35 (1G)				0.033	0.30	2010	3480
				0.028	0.24	2900	4490
				0.025	0.21	3190	5140
				0.024	0.19	3470	5810
				0.023	0.18	3400	5480
				0.020	0.14	3630	6070
				0.019	0.12	3930	6810
				0.022	0.16	3470	5600
				0.019	0.12	3750	6280
				0.018	0.10	4080	7070
50 (1U)				0.079	0.39	2260	3350
				0.065	0.30	2520	4220
				0.057	0.25	2780	4810
				0.050	0.22	3020	5240
				0.048	0.20	2960	5130
				0.039	0.15	3160	5480
				0.034	0.14	3420	5930
				0.038	0.15	3020	5240
				0.033	0.12	3390	5870
				0.031	0.11	3700	6420



Rated voltage (V)	Rated capacitance (μF)	Case φD × L (mm)	Size code	ESR (Ω max. / 100kHz)		Rated ripple current (mA rms / 100kHz)	
				20°C	-40°C	135°C	125°C
				63 (4E)			
0.061	0.30	2630	3110				
0.051	0.25	2970	3760				
0.045	0.22	3260	4610				
0.049	0.20	3050	3860				
0.039	0.15	3420	4590				
0.041	0.15	3220	4080				
0.036	0.14	3670	5190				
0.032	0.12	3690	5220				
0.031	0.11	3820	5660				
80 (1R)				0.076	0.39	2050	2520
				0.061	0.30	2630	3110
				0.051	0.25	2970	3760
				0.045	0.22	3260	4610
				0.049	0.20	3050	3860
				0.039	0.15	3420	4590
				0.041	0.15	3220	4080
				0.036	0.14	3670	5190
				0.032	0.12	3690	5220
				0.031	0.11	3820	5660
100 (1H)				0.099	0.55	1960	2140
				0.076	0.41	2330	2950
				0.065	0.35	2630	3530
				0.055	0.29	2920	4140
				0.060	0.27	2720	3440
				0.052	0.23	2960	4190
				0.054	0.20	2920	3920
				0.041	0.18	3380	5020
				0.044	0.16	3330	4710
				0.038	0.14	3560	5280

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

## 150°C Use, Miniature, Low ESR, High Vibration Resistance Capacitors

GREEN CAP	High Vibration Resistance	Low ESR	150°C 2000hours	Anti-cleaning solvent
-----------	---------------------------	---------	-----------------	-----------------------

- Vibration resistance (40G,10 to 2000Hz, X,Y,Z = per 2hours).
- For Automotive application (ABS and electric power steering etc.)
- Guaranteed 2000 hours at 150°C (63V, 80V : 1000 hours)

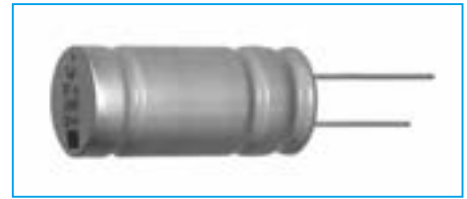


Marking color : Black print

### Specifications

Item	Performance												
Category temperature range (°C)	-40 to +150												
Tolerance at rated capacitance (%)	±20 (20°C,120Hz)												
Leakage current (μA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (μF), V : Rated voltage (V) (20°C)												
Tangent of loss angle (tanδ)	<table border="1"> <tr> <th>Rated voltage (V)</th> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>80</td> </tr> <tr> <th>tanδ (max.)</th> <td>0.14</td> <td>0.12</td> <td>0.10</td> <td>0.10</td> <td>0.08</td> </tr> </table>	Rated voltage (V)	25	35	50	63	80	tanδ (max.)	0.14	0.12	0.10	0.10	0.08
	Rated voltage (V)	25	35	50	63	80							
tanδ (max.)	0.14	0.12	0.10	0.10	0.08								
0.02 is added to every 1000μF increase over 1000μF. (20°C,120Hz)													
Characteristics at high and low temperature	<table border="1"> <tr> <th>Rated voltage (V)</th> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>80</td> </tr> <tr> <th>Impedance ratio (max.)</th> <td>Z-40°C/Z+20°C</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> </tr> </table>	Rated voltage (V)	25	35	50	63	80	Impedance ratio (max.)	Z-40°C/Z+20°C	3	3	3	3
	Rated voltage (V)	25	35	50	63	80							
Impedance ratio (max.)	Z-40°C/Z+20°C	3	3	3	3								
(120Hz)													
Endurance (150°C or 125°C) (Applied ripple current)	Test time	2000 hours (63V, 80V : 1000 hours)											
	Leakage current	The initial specified value or less											
	Percentage of capacitance change	Within ±30% of initial value											
	Tangent of the loss angle	300% or less of the initial specified value											
Shelf life (150°C)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1												
Vibration	Vibration test condition												
	Frequency range	10 to 2000Hz											
	Amplitude or Acceleration	1.5 mm peak to peak or 40G (392m/s <sup>2</sup> ), whichever is the less severe											
	Sweep rate	0.5 octave/min.											
	Vibration axis and duration	X, Y, Z per 2 hours, total 6 hours											
	Fixation	Capacitor mounted by its body which is rigidly clamped to the work surface.											
Specification after test													
Leakage current	The initial specified value or less												
Percentage of capacitance change	Within ±30% of initial value												
Tangent of the loss angle	300% or less of the initial specified value												
Applicable standards	JIS C5101 - 1, - 4 (IEC 60384 - 1, - 4 )												

### Outline Drawing

Unit : mm

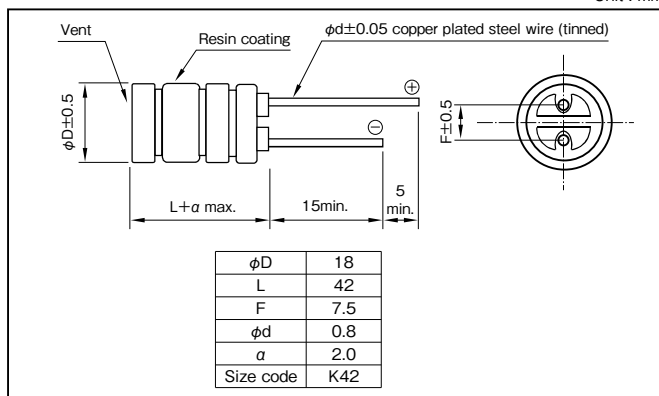

### Coefficient of Frequency for Rated Ripple Current

Rated capacitance (μF)	Frequency (Hz)			
	120	1k	10k	100k
800	0.75	0.90	1.00	1
1200 to 3900	0.85	0.95	1.00	1

Product code system : 35V2700μF  
(\*For automotive: powertrain, safety)

RA*	RKG	272	M	1G	K42		T
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Lead-forming and packing code	Additional code

For details, refer to the various "Product Code System" pages.

### Standard Ratings

Rated voltage (V)	Rated capacitance (μF)	ESR (Ω max. / 100kHz)		Rated ripple current (mA rms / 100kHz)	
		20°C	-40°C	150°C	125°C
25 (1T)	3900	0.020	0.11	3100	8000
35 (1G)	2700	0.020	0.11	3100	8000
50 (1U)	1800	0.034	0.19	2800	7000
63 (4E)	1200	0.034	0.19	2900	7300
80 (1R)	800	0.034	0.19	2900	7300

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

**Aluminum Electrolytic Capacitors for Audio**


**Chip Type Audio Use Capacitors (PURECAP™)**

GREEN CAP


SMD

For Audio

- Audio grade surface mount product with completely new components using synthetic mica paper for the separator.
- Both quality sense and sound field that could not be realized by the surface mount products are reproducible.

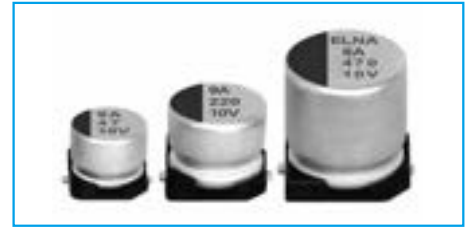

Marking color : Black print




**Specifications**

Item	Performance							
Category temperature range (°C)	-40 to +85							
Tolerance at rated capacitance (%)	±20 (20°C,120Hz)							
Leakage current (µA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (µF) ; V: Rated voltage (V) (20°C)							
Tangent of loss angle (tanδ)	Rated voltage (V)	6.3	10	16	25	35	50	
	tanδ (max.)	0.28	0.24	0.20	0.14	0.12	0.10	
Characteristics at high and low temperature	Rated voltage (V)	6.3	10	16	25	35	50	
	Impedance ratio (max.)	Z-25°C/Z+20°C	3	3	2	2	2	2
		Z-40°C/Z+20°C	8	5	4	3	3	3
Endurance (85°C) (Applied ripple current)	Test time	2000 hours						
	Leakage current	The initial specified value or less						
	Percentage of capacitance change	Within ±20% of initial value						
	Tangent of the loss angle	200% or less of the initial specified value						
Shelf life (85°C)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1							
Applicable standards	JIS C5101 - 1, - 18 (IEC 60384 - 1, - 18)							

**Outline Drawing**

Unit : mm

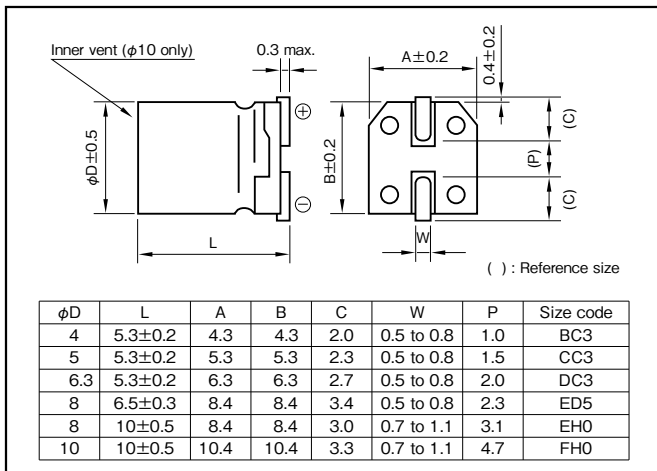

Refer to individual page.

(Soldering conditions, Land pattern size, The taping specifications)

**Coefficient of Frequency for Rated Ripple Current**

Rated voltage (V)	Frequency (Hz)			
	50	120	1k	10k·100k
6.3 to 16	0.80	1	1.15	1.25
25 to 35	0.80	1	1.25	1.40
50	0.80	1	1.35	1.50

**Product code system (\*For general product)**

φ4 to φ6.3, φ8×6.5 (example : 16V47µF)

RS*	VVO	470	M	1E	DC3		P2U
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Taping and packing code	Additional code

φ8×10 (example : 16V330µF)

RS*	VVO	331	M	1E	EH0		Y1U
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Taping and packing code	Additional code

φ10×10 (example : 16V470µF)

RS*	VVO	471	M	1E	FH0		EU
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Taping and packing code	Additional code

For details, refer to the various "Product Code System" pages.

**Standard Ratings**

Rated capacitance (µF)	6.3 (1J)		10 (1L)		16 (1E)		25 (1T)		35 (1G)		50 (1U)	
	Case φD×L (mm)	Rated ripple current (mArms)	Case φD×L (mm)	Rated ripple current (mArms)	Case φD×L (mm)	Rated ripple current (mArms)	Case φD×L (mm)	Rated ripple current (mArms)	Case φD×L (mm)	Rated ripple current (mArms)	Case φD×L (mm)	Rated ripple current (mArms)
0.33	—	—	—	—	—	—	—	—	—	—	4×5.3	6
0.47	—	—	—	—	—	—	—	—	—	—	4×5.3	7
1	—	—	—	—	—	—	—	—	—	—	4×5.3	10
2.2	—	—	—	—	—	—	—	—	—	—	4×5.3	15
3.3	—	—	—	—	—	—	—	—	4×5.3	17	4×5.3	19
4.7	—	—	—	—	4×5.3	18	4×5.3	19	4×5.3	20	5×5.3	26
10	—	—	4×5.3	23	4×5.3	26	5×5.3	32	5×5.3	34	6.3×5.3	44
22	4×5.3	31	5×5.3	40	5×5.3	44	6.3×5.3	55	6.3×5.3	59	8×6.5	124
33	5×5.3	44	5×5.3	49	6.3×5.3	63	6.3×5.3	67	8×6.5	124	8×6.5	124
47	5×5.3	53	6.3×5.3	68	6.3×5.3	76	8×6.5	124	8×6.5	124	8×10	200
100	6.3×5.3	90	6.3×5.3	99	8×6.5	124	8×6.5	137	8×10	200	10×10	366
220	8×6.5	149	8×6.5	149	8×10	200	8×10	235	10×10	366	—	—
330	8×6.5	160	8×10	226	8×10	245	10×10	366	—	—	—	—
470	8×10	251	10×10	366	10×10	366	—	—	—	—	—	—
1000	10×10	423	—	—	—	—	—	—	—	—	—	—

(Note) Rated ripple current : 85°C, 120Hz.

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Chip Type, For Audio, High Grade Capacitors


GREEN CAP

SMD

105°C  
2000hours

For Audio

- New developed Al-Foil and Electrolyte for Audio grade allow lower distortion.
- New range of bright and smooth sound is achieved in SMD area.
- Guarantees 2000 hours 105°C.




Marking color : Black print

Specifications

Item	Performance																				
Category temperature range (°C)	-55 to +105																				
Tolerance at rated capacitance (%)	±20 (20°C, 120Hz)																				
Leakage current (µA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (µF), V: Rated voltage (V) (20°C)																				
Tangent of loss angle (tanδ)	<table border="1"> <thead> <tr> <th>Rated voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> </tr> </thead> <tbody> <tr> <td>tanδ (max.)</td> <td>0.28</td> <td>0.24</td> <td>0.20</td> <td>0.16</td> <td>0.13</td> <td>0.12</td> </tr> </tbody> </table> <p>(20°C, 120Hz)</p>	Rated voltage (V)	6.3	10	16	25	35	50	tanδ (max.)	0.28	0.24	0.20	0.16	0.13	0.12						
Rated voltage (V)	6.3	10	16	25	35	50															
tanδ (max.)	0.28	0.24	0.20	0.16	0.13	0.12															
Characteristics at high and low temperature	<table border="1"> <thead> <tr> <th>Rated voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> </tr> </thead> <tbody> <tr> <td rowspan="2">Impedance ratio (max.)</td> <td>Z-25°C/Z+20°C</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z-55°C/Z+20°C</td> <td>8</td> <td>4</td> <td>4</td> <td>3</td> <td>3</td> </tr> </tbody> </table> <p>(120Hz)</p>	Rated voltage (V)	6.3	10	16	25	35	50	Impedance ratio (max.)	Z-25°C/Z+20°C	2	2	2	2	2	Z-55°C/Z+20°C	8	4	4	3	3
Rated voltage (V)	6.3	10	16	25	35	50															
Impedance ratio (max.)	Z-25°C/Z+20°C	2	2	2	2	2															
	Z-55°C/Z+20°C	8	4	4	3	3															
Endurance (105°C)	<table border="1"> <tbody> <tr> <td>Test time</td> <td>2000 hours</td> </tr> <tr> <td>Leakage current</td> <td>The initial specified value or less</td> </tr> <tr> <td>Percentage of capacitance change</td> <td>Within ±30% of initial value</td> </tr> <tr> <td>Tangent of the loss angle</td> <td>300% or less of the initial specified value</td> </tr> </tbody> </table>	Test time	2000 hours	Leakage current	The initial specified value or less	Percentage of capacitance change	Within ±30% of initial value	Tangent of the loss angle	300% or less of the initial specified value												
Test time	2000 hours																				
Leakage current	The initial specified value or less																				
Percentage of capacitance change	Within ±30% of initial value																				
Tangent of the loss angle	300% or less of the initial specified value																				
Shelf life (105°C)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1																				
Applicable standards	JIS C5101 - 1, - 18 (IEC 60384 - 1, - 18)																				

Outline Drawing

Unit : mm

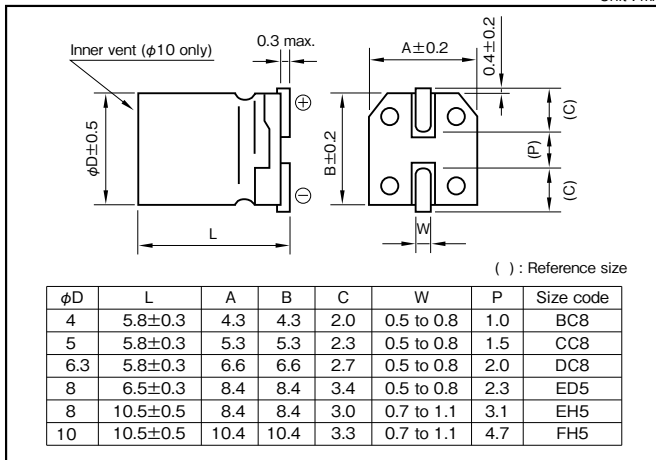

Coefficient of Frequency for Rated Ripple Current

Rated voltage (V)	Frequency (Hz)			
	50	120	1k	10k·100k
6.3 to 16	0.80	1	1.15	1.25
25 to 35	0.80	1	1.25	1.40
50	1 to 3.3µF	0.50	1	1.35
	4.7µF or more	0.70	1	1.35

Product code system : 6.3V220µF (\*For general product)

RS*	VVM	221	M	1J	EH5	PU
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Taping and packing code

For details, refer to the various "Product Code System" pages.

Refer to individual page.  
(Soldering conditions, Land pattern size, The taping specifications)

Standard Ratings

Rated voltage (V)	6.3 (1J)		10 (1L)		16 (1E)		25 (1T)		35 (1G)		50 (1U)	
	Case φD×L (mm)	Rated ripple current (mA Arms)	Case φD×L (mm)	Rated ripple current (mA Arms)	Case φD×L (mm)	Rated ripple current (mA Arms)	Case φD×L (mm)	Rated ripple current (mA Arms)	Case φD×L (mm)	Rated ripple current (mA Arms)	Case φD×L (mm)	Rated ripple current (mA Arms)
1	—	—	—	—	—	—	—	—	—	—	4×5.8	7
2.2	—	—	—	—	—	—	—	—	—	—	4×5.8	10
3.3	—	—	—	—	—	—	—	—	—	—	4×5.8	12
4.7	—	—	—	—	4×5.8	11	4×5.8	13	4×5.8	14	5×5.8	17
10	—	—	4×5.8	15	4×5.8	17	5×5.8	21	5×5.8	24	6.3×5.8	29
22	4×5.8	21	5×5.8	26	5×5.8	28	6.3×5.8	37	6.3×5.8	41	8×6.5	52
33	5×5.8	29	5×5.8	32	6.3×5.8	41	6.3×5.8	45	8×6.5	62	8×10.5	75
47	5×5.8	35	6.3×5.8	44	6.3×5.8	48	8×6.5	66	8×10.5	86	8×10.5	90
100	6.3×5.8	60	8×6.5	79	8×6.5	86	8×10.5	113	10×10.5	145	10×10.5	151
					8×10.5	101						
220	8×10.5	127	8×10.5	137	8×10.5	150	10×10.5	194	10×10.5	216	—	—
					10×10.5	174						
330	8×10.5	156	10×10.5	194	10×10.5	213	—	—	—	—	—	—
470	10×10.5	215	10×10.5	232	10×10.5	254	—	—	—	—	—	—

(Note) Rated ripple current : 105°C, 120Hz.

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

**Chip Type Audio Use Capacitors**

GREEN CAP SMD For Audio



Marking color : Black print


- New developed Al-Foil and Electrolyte for Audio grade allow lower distortion.
- New range of bright and smooth sound is achieved in SMD area.

**Specifications**

Item	Performance						
Category temperature range (°C)	-40 to +85						
Tolerance at rated capacitance (%)	±20 (20°C,120Hz)						
Leakage current (µA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (µF) ; V : Rated voltage (V) (20°C)						
Tangent of loss angle (tanδ)	Rated voltage (V)	6.3	10	16	25	35	
	tanδ (max.)	0.28	0.24	0.20	0.16	0.14	
Characteristics at high and low temperature	Rated voltage (V)	6.3	10	16	25	35	
	Impedance ratio (max.)	Z-25°C/Z+20°C	4	3	2	2	2
		Z-40°C/Z+20°C	8	5	4	3	3
Endurance (85°C) (Applied ripple current)	Test time	2000 hours					
	Leakage current	The initial specified value or less					
	Percentage of capacitance change	Within ±20% of initial value					
	Tangent of the loss angle	200% or less of the initial specified value					
Shelf life (85°C)	Test time : 500hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1						
Applicable standards	JIS C5101 - 1, - 18 (IEC 60384 - 1, - 18)						

**Outline Drawing**

Unit : mm

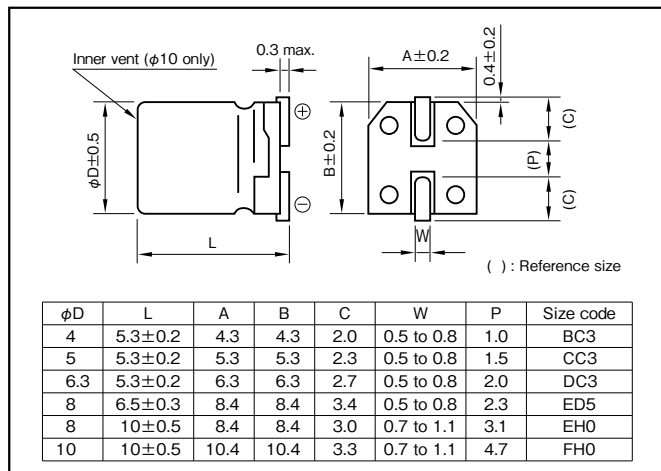

Refer to individual page.  
(Soldering conditions, Land pattern size, The taping specifications)

**Coefficient of Frequency for Rated Ripple Current**

Frequency (Hz)	50	120	1k	10k - 100k
Rated voltage (V)				
6.3 to 16	0.80	1	1.15	1.25
25 to 35	0.80	1	1.25	1.40

**Product code system : 16V47µF (\*For general product)**

RS*	VVG	470	M	1E	DC3		U
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Taping and packing code	Additional code

For details, refer to the various "Product Code System" pages.

**Standard Ratings**

Rated voltage (V)	6.3 (1J)		10 (1L)		16 (1E)		25 (1T)		35 (1G)	
	Case φD×L (mm)	Rated ripple current (mArms)	Case φD×L (mm)	Rated ripple current (mArms)	Case φD×L (mm)	Rated ripple current (mArms)	Case φD×L (mm)	Rated ripple current (mArms)	Case φD×L (mm)	Rated ripple current (mArms)
3.3	—	—	—	—	—	—	—	—	4×5.3	11
4.7	—	—	—	—	4×5.3	11	4×5.3	12	4×5.3	13
10	—	—	—	—	5×5.3	19	5×5.3	21	5×5.3	22
22	4×5.3	20	—	—	5×5.3	28	6.3×5.3	36	6.3×5.3	39
33	5×5.3	29	5×5.3	31	6.3×5.3	40	6.3×5.3	44	8×6.5	60
47	5×5.3	34	6.3×5.3	43	6.3×5.3	47	8×6.5	66	8×10	82
100	6.3×5.3	58	8×6.5	79	8×6.5	87	8×10	112	10×10	139
220	8×6.5	107	8×10	136	8×10	149	10×10	192	—	—
330	8×10	153	8×10	166	10×10	221	—	—	—	—
470	8×10	183	10×10	229	—	—	—	—	—	—


(Note) Rated ripple current : 85°C, 120Hz

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

## Miniature Capacitors for Audio (TONEREX™)

GREEN CAP

For Audio

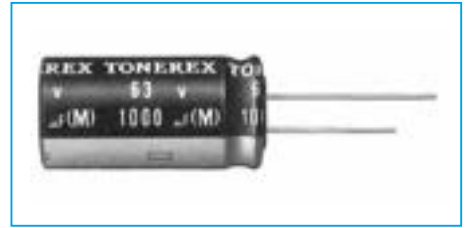

Marking color : Gold print on a black sleeve


- Adopting the newly developed formation method and composite electrolytic paper for audio application has reduced distortion, achieving high-quality sound.
- All lead wires are oxygen-free copper wires to reduce distortion.

### Specifications

Item	Performance								
Category temperature range (°C)	-40 to +85								
Tolerance at rated capacitance (%)	±20 (20°C,120Hz)								
Leakage current (μA) (max.)	0.01CV or 4 whichever is larger (after 5 minutes) C : Rated capacitance (μF) ; V: Rated voltage (V) (20°C)								
Tangent of loss angle (tanδ)	Rated voltage (V)	6.3	10	16	25	35	50	63	100
	tanδ (max.)	0.24	0.20	0.16	0.14	0.12	0.10	0.09	0.08
0.02 is added to every 1000μF increase over 1000μF (20°C,120Hz)									
Endurance (85°C) (Applied ripple current)	Test time	1000 hours							
	Leakage current	The initial specified value or less							
	Percentage of capacitance change	Within ±20% of initial value							
	Tangent of the loss angle	150% or less of the initial specified value							
Shelf life (85°C)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1								
Applicable standards	JIS C5101 - 1, - 4 (IEC 60384 - 1, - 4)								

### Outline Drawing

Unit : mm

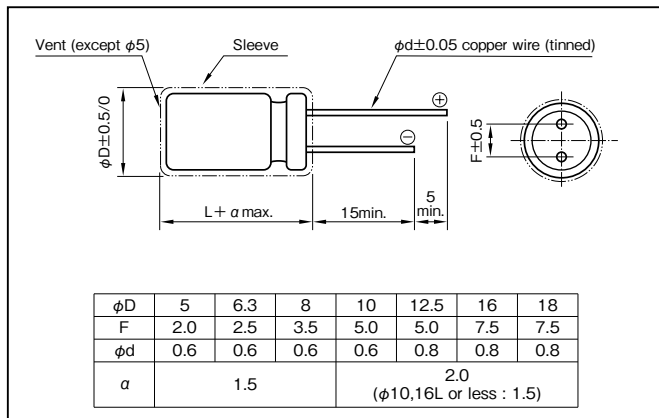

### Coefficient of Frequency for Rated Ripple Current

Rated voltage (V)	Frequency (Hz)	CV (μF×VV)					
		50·60	120	1k	10k	100k	
6.3 to 16	All CV value	0.8	1	1.1	1.2	1.2	
	≤1000	0.8	1	1.5	1.7	1.7	
25 to 35	1000<	0.8	1	1.2	1.3	1.3	
	≤1000	0.8	1	1.6	1.9	1.9	
50 to 100	1000<	0.8	1	1.2	1.3	1.3	
	≤1000	0.8	1	1.2	1.3	1.3	

### Product code system : 25V100μF (\*For general product)

RS*	ROB	101	M	1T	E11		T
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Lead-forming and packing code	Additional code

For details, refer to the various "Product Code System" pages.

### Size code

Case φD×L (mm)	Size code	Case φD×L (mm)	Size code	Case φD×L (mm)	Size code	Case φD×L (mm)	Size code
5×11	C11	10×12.5	F12	12.5×20	G20	16×31.5	J31
6.3×11	D11	10×16	F16	12.5×25	G25	16×35.5	J35
8×11.5	E11	10×20	F20	16×25	J25	18×35.5	K35
						18×40	K40

### Standard Ratings


Rated capacitance (μF)	Rated voltage (V)	6.3 (1J)		10 (1L)		16 (1E)		25 (1T)		35 (1G)		50 (1U)		63 (4E)		100 (1H)	
		Case φD×L (mm)	Rated ripple current (mArms)	Case φD×L (mm)	Rated ripple current (mArms)	Case φD×L (mm)	Rated ripple current (mArms)	Case φD×L (mm)	Rated ripple current (mArms)	Case φD×L (mm)	Rated ripple current (mArms)	Case φD×L (mm)	Rated ripple current (mArms)	Case φD×L (mm)	Rated ripple current (mArms)	Case φD×L (mm)	Rated ripple current (mArms)
1		—	—	—	—	—	—	—	—	—	—	5×11	10	—	—	5×11	15
2.2		—	—	—	—	—	—	—	—	—	—	5×11	20	—	—	5×11	25
3.3		—	—	—	—	—	—	—	—	—	—	5×11	25	—	—	5×11	30
4.7		—	—	—	—	—	—	5×11	25	—	—	5×11	35	5×11	35	6.3×11	40
10		—	—	—	—	5×11	35	5×11	40	5×11	45	5×11	50	6.3×11	60	8×11.5	70
22		—	—	5×11	50	5×11	60	5×11	60	6.3×11	75	6.3×11	80	8×11.5	100	10×12.5	120
33		5×11	55	5×11	65	5×11	70	6.3×11	80	6.3×11	90	8×11.5	110	8×11.5	115	10×16	160
47		5×11	65	5×11	75	6.3×11	95	6.3×11	100	8×11.5	120	8×11.5	130	10×12.5	165	10×20	210
100		6.3×11	110	6.3×11	120	8×11.5	150	8×11.5	165	10×12.5	210	10×16	250	10×20	285	12.5×20	340
220		8×11.5	185	8×11.5	200	10×12.5	265	10×16	310	10×20	365	12.5×20	440	12.5×20	470	16×25	620
330		10×12.5	265	10×12.5	290	10×16	350	10×20	410	12.5×20	500	12.5×20	540	12.5×25	620	16×31.5	820
470		10×12.5	315	10×16	380	10×20	460	12.5×20	550	12.5×25	640	16×25	800	16×25	840	18×35.5	1000
1000		10×20	550	12.5×20	670	12.5×25	810	16×25	1000	16×25	1050	16×31.5	1200	18×35.5	1500	—	—
2200		12.5×25	980	16×25	1200	16×25	1350	16×35.5	1650	18×35.5	1900	—	—	—	—	—	—
3300		16×25	1300	16×31.5	1600	16×35.5	1800	18×40	2100	—	—	—	—	—	—	—	—
4700		16×31.5	1700	16×35.5	1900	18×35.5	2400	—	—	—	—	—	—	—	—	—	—
6800		16×35.5	2100	18×40	2600	—	—	—	—	—	—	—	—	—	—	—	—
10000		18×40	2800	—	—	—	—	—	—	—	—	—	—	—	—	—	—

(Note) Rated ripple current : 85°C, 120Hz

NOTE : Design, Specifications are subject to change without notice. It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.


## Miniature Capacitors for Audio (PURECAP™)

GREEN CAP For Audio

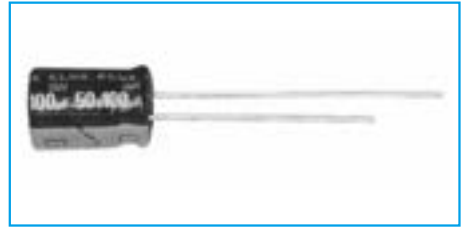

Marking color : Gold print on a black sleeve


- A standard capacitor utilizing a newly developed material for a high grade of audio reproduction.
- All lead wires are copper plated steel wires.
- New type miniaturized capacitor for audio, using synthetic mica paper for the separator.



### Specifications

Item	Performance							
Category temperature range (°C)	-40 to +85							
Tolerance at rated capacitance (%)	±20 (20°C,120Hz)							
Leakage current (µA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (µF) ; V : Rated voltage (V) (20°C)							
Tangent of loss angle (tanδ)	Rated voltage (V)	6.3	10	16	25	35	50	63
		0.22	0.19	0.16	0.14	0.12	0.10	0.09
0.02 is added to every 1000µF increase over 1000µF (20°C,120Hz)								
Endurance (85°C) (Applied ripple current)	Test time	1000 hours						
	Leakage current	The initial specified value or less						
	Percentage of capacitance change	Within ±20% of initial value						
	Tangent of the loss angle	150% or less of the initial specified value						
Shelf life (85°C)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1							
Applicable standards	JIS C5101 - 1, - 4 (IEC 60384 - 1, - 4)							

### Outline Drawing

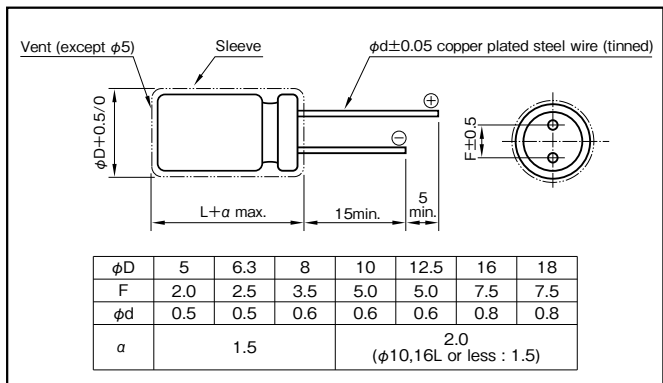

### Coefficient of Frequency for Rated Ripple Current

Rated voltage(V)	Frequency(Hz)	CV(µF×VV)				
		50・60	120	1k	10k	100k
6.3 to 16	All CV value	0.8	1	1.1	1.2	1.2
	≤1000	0.8	1	1.5	1.7	1.7
25 to 35	1000<	0.8	1	1.2	1.3	1.3
	≤1000	0.8	1	1.6	1.9	1.9
50 to 63	1000<	0.8	1	1.2	1.3	1.3
	≤1000	0.8	1	1.2	1.3	1.3

### Product code system : 25V100µF (\*For general product)

RS*	RFO	101	M	1T	D11		PT
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Lead-forming and packing code	Additional code

For details, refer to the various "Product Code System" pages.

### Size code

Case	Size code	Case	Size code	Case	Size code	Case	Size code
φD×L (mm)		φD×L (mm)		φD×L (mm)		φD×L (mm)	
5×11	C11	10×12.5	F12	12.5×20	G20	16×31.5	J31
6.3×11	D11	10×16	F16	12.5×25	G25	18×35.5	J35
8×11.5	E11	10×20	F20	16×25	J25		

### Standard Ratings

Rated capacitance (µF)	6.3 (1J)		10 (1L)		16 (1E)		25 (1T)		35 (1G)		50 (1U)		63 (4E)	
	Case	Rated ripple current (mArms)	Case	Rated ripple current (mArms)	Case	Rated ripple current (mArms)	Case	Rated ripple current (mArms)	Case	Rated ripple current (mArms)	Case	Rated ripple current (mArms)	Case	Rated ripple current (mArms)
1	—	—	—	—	—	—	—	—	—	—	5×11	15	—	—
2.2	—	—	—	—	—	—	—	—	—	—	5×11	20	—	—
3.3	—	—	—	—	—	—	—	—	—	—	5×11	25	—	—
4.7	—	—	—	—	—	—	—	—	5×11	30	5×11	30	5×11	35
10	—	—	—	—	—	—	—	—	5×11	45	5×11	45	5×11	50
22	—	—	—	—	5×11	50	5×11	55	5×11	60	5×11	70	6.3×11	85
33	—	—	5×11	55	5×11	60	5×11	70	5×11	80	6.3×11	100	6.3×11	100
47	—	—	5×11	65	5×11	75	5×11	85	6.3×11	110	6.3×11	120	8×11.5	150
100	5×11	85	5×11	95	6.3×11	120	6.3×11	140	8×11.5	190	8×11.5	210	10×12.5	260
220	6.3×11	150	6.3×11	165	8×11.5	220	8×11.5	250	10×12.5	330	10×16	400	10×20	460
330	6.3×11	180	8×11.5	240	8×11.5	270	10×12.5	370	10×16	450	10×20	540	12.5×20	650
470	8×11.5	260	8×11.5	280	10×12.5	390	10×16	480	10×20	590	12.5×20	740	12.5×25	850
1000	10×12.5	450	10×16	540	10×20	680	12.5×20	880	12.5×25	1050	16×25	1350	16×31.5	1550
2200	12.5×20	890	12.5×20	970	12.5×25	1200	16×25	1550	16×31.5	1750	18×35.5	2100	—	—
3300	12.5×20	1050	12.5×25	1250	16×25	1600	16×31.5	1950	18×35.5	2250	—	—	—	—
4700	16×25	1550	16×25	1650	16×31.5	2050	18×35.5	2500	—	—	—	—	—	—
6800	16×25	1750	16×31.5	2050	18×35.5	2550	—	—	—	—	—	—	—	—
10000	16×31.5	2150	18×35.5	2550	—	—	—	—	—	—	—	—	—	—
15000	18×35.5	2700	—	—	—	—	—	—	—	—	—	—	—	—

(Note) Rated ripple current : 85°C, 120Hz


NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.



## Miniature Capacitors for Audio

GREEN CAP For Audio

- With the same size as that for Series RE3 miniaturized standard capacitors, a high resolution sound quality grade has been realized.
- The newly developed audio use material makes clear sound a reality.
- All lead wires are copper plated steel wires.




Marking color : White print on a brown sleeve

### Specifications

Item	Performance	
Category temperature range (°C)	-40 to +85	
Tolerance at rated capacitance (%)	±20 (20°C,120Hz)	
Leakage current (µA) (max.)	0.01 CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (µF) ; V : Rated voltage (V) (20°C)	
Tangent of loss angle (tanδ)	Rated voltage (V)	6.3    10    16    25    35    50    63    100
	tanδ (max.)	0.28    0.24    0.20    0.16    0.14    0.12    0.11    0.10
0.02 is added to every 1000µF increase over 1000µF (20°C,120Hz)		
Endurance (85°C) (Applied ripple current)	Test time	2000 hours
	Leakage current	The initial specified value or less
	Percentage of capacitance change	Within ±20% of initial value
	Tangent of the loss angle	200% or less of the initial specified value
Shelf life (85°C)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1	
Applicable standards	JIS C5101 - 1,- 4 (IEC 60384 - 1,- 4)	

### Outline Drawing

Unit : mm

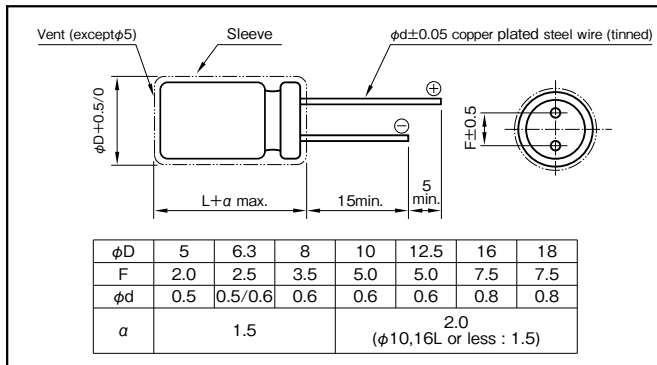

### Coefficient of Frequency for Rated Ripple Current

Rated voltage(V)	Frequency (Hz)	CV (µF×VV)				
		50 · 60	120	1k	10k	100k
6.3 to 16	All CV value	0.8	1	1.1	1.2	1.2
	≤1000	0.8	1	1.5	1.7	1.7
25 to 35	1000<	0.8	1	1.2	1.3	1.3
	≤1000	0.8	1	1.6	1.9	1.9
50 to 100	1000<	0.8	1	1.2	1.3	1.3
	≤1000	0.8	1	1.2	1.3	1.3

### Product code system : 25V100µF (\*For general product)

RS*	RA3	101	M	1T	D11		T8
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Lead-forming and packing code	Additional code

For details, refer to the various "Product Code System" pages.

### Size code

Case φD×L (mm)	Size code	Case φD×L (mm)	Size code	Case φD×L (mm)	Size code	Case φD×L (mm)	Size code
5×11	C11	10×12.5	F12	12.5×20	G20	16×31.5	J31
6.3×11	D11	10×16	F16	12.5×25	G25	18×35.5	K35
8×11.5	E11	10×20	F20	16×25	J25		

### Standard Ratings


Rated capacitance (µF)	6.3 (1J)		10 (1L)		16 (1E)		25 (1T)		35 (1G)		50 (1U)		63 (4E)		100 (1H)	
	Case φD×L (mm)	Rated ripple current (mA)	Case φD×L (mm)	Rated ripple current (mA)	Case φD×L (mm)	Rated ripple current (mA)	Case φD×L (mm)	Rated ripple current (mA)	Case φD×L (mm)	Rated ripple current (mA)	Case φD×L (mm)	Rated ripple current (mA)	Case φD×L (mm)	Rated ripple current (mA)	Case φD×L (mm)	Rated ripple current (mA)
1	—	—	—	—	—	—	—	—	—	—	5×11	21	—	—	5×11	21
2.2	—	—	—	—	—	—	—	—	—	—	5×11	31	—	—	5×11	31
3.3	—	—	—	—	—	—	—	—	—	—	5×11	38	—	—	5×11	40
4.7	—	—	—	—	—	—	—	—	—	—	5×11	45	—	—	5×11	50
10	—	—	—	—	5×11	50	5×11	55	5×11	60	5×11	66	5×11	70	5×11	70
22	—	—	—	—	5×11	75	5×11	90	5×11	95	5×11	100	5×11	105	6.3×11	115
33	—	—	—	—	5×11	110	5×11	110	5×11	110	5×11	110	6.3×11	130	8×11.5	158
47	—	—	—	—	5×11	130	5×11	130	5×11	130	6.3×11	155	6.3×11	160	8×11.5	188
100	5×11	130	5×11	150	5×11	180	6.3×11	199	6.3×11	214	8×11.5	250	8×11.5	270	10×16	358
220	5×11	240	6.3×11	250	6.3×11	280	8×11.5	349	8×11.5	350	10×12.5	429	10×16	505	12.5×20	663
330	6.3×11	300	6.3×11	330	8×11.5	383	8×11.5	383	10×12.5	542	10×16	595	10×20	676	12.5×25	886
470	6.3×11	380	8×11.5	417	8×11.5	480	10×12.5	545	10×16	664	12.5×20	887	12.5×20	924	16×25	1230
1000	8×11.5	580	10×12.5	650	10×16	791	10×20	996	12.5×20	1210	12.5×25	1400	16×25	1710	18×35.5	2210
2200	10×16	939	10×20	1080	12.5×20	1350	12.5×25	1660	16×25	1950	16×31.5	2340	18×35.5	2870	—	—
3300	10×20	1230	12.5×20	1430	12.5×25	1690	16×25	2030	16×31.5	2320	18×35.5	2810	—	—	—	—
4700	12.5×20	1710	12.5×25	1780	16×25	2100	16×31.5	2650	18×35.5	2990	—	—	—	—	—	—
6800	12.5×25	1930	16×25	2270	16×31.5	2480	18×35.5	3290	—	—	—	—	—	—	—	—
10000	16×25	2450	16×31.5	2500	18×35.5	3130	—	—	—	—	—	—	—	—	—	—
15000	16×31.5	2580	18×35.5	3100	—	—	—	—	—	—	—	—	—	—	—	—
22000	18×35.5	3150	—	—	—	—	—	—	—	—	—	—	—	—	—	—

(Note) Rated ripple current : 85°C, 120Hz


NOTE : Design, Specifications are subject to change without notice. It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

## 105°C Miniature Capacitors for Audio

GREEN CAP 105°C 1000hours For Audio

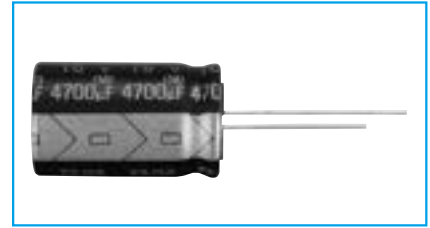


- With the same size as that for Series RJ5 miniaturized standard capacitors, a high resolution sound quality grade has been realized.
- Guarantees 1000 hours at 105°C



### Specifications

Item	Performance														
Category temperature range (°C)	-55 to +105														
Tolerance at rated capacitance (%)	±20 (20°C, 120Hz) <span style="float: right;">Marking color : Gold print on a black sleeve</span>														
Leakage current (µA) (max.)	0.03CV or 4 whichever is larger (after 1 minutes) C : Rated capacitance (µF) , V : Rated voltage (V) (20°C)														
Tangent of loss angle (tanδ)	<table border="1"> <tr> <td>Rated voltage (V)</td> <td>16</td> <td>25</td> </tr> <tr> <td>tanδ (max.)</td> <td>0.24</td> <td>0.20</td> </tr> </table> <p>0.02CV is added to every 1000µF increase over 1000µF (20°C, 120Hz)</p>	Rated voltage (V)	16	25	tanδ (max.)	0.24	0.20								
Rated voltage (V)	16	25													
tanδ (max.)	0.24	0.20													
Characteristics at high and low temperature	<table border="1"> <tr> <td>Rated voltage (V)</td> <td>16</td> <td>25</td> </tr> <tr> <td rowspan="2">Impedance ratio (max.)</td> <td>Z-25°C/Z+20°C</td> <td>3</td> </tr> <tr> <td>Z-40°C/Z+20°C</td> <td>6</td> </tr> <tr> <td></td> <td></td> <td>2</td> </tr> <tr> <td></td> <td></td> <td>4</td> </tr> </table> <p>(120Hz)</p>	Rated voltage (V)	16	25	Impedance ratio (max.)	Z-25°C/Z+20°C	3	Z-40°C/Z+20°C	6			2			4
Rated voltage (V)	16	25													
Impedance ratio (max.)	Z-25°C/Z+20°C	3													
	Z-40°C/Z+20°C	6													
		2													
		4													
Endurance (105°C) (Applied ripple current)	<table border="1"> <tr> <td>Test time</td> <td>1000 hours</td> </tr> <tr> <td>Leakage current</td> <td>The initial specified value or less</td> </tr> <tr> <td>Percentage of capacitance change</td> <td>Within ±20% of initial value</td> </tr> <tr> <td>Tangent of the loss angle</td> <td>200% or less of the initial specified value</td> </tr> </table>	Test time	1000 hours	Leakage current	The initial specified value or less	Percentage of capacitance change	Within ±20% of initial value	Tangent of the loss angle	200% or less of the initial specified value						
Test time	1000 hours														
Leakage current	The initial specified value or less														
Percentage of capacitance change	Within ±20% of initial value														
Tangent of the loss angle	200% or less of the initial specified value														
Shelf life (105°C)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1														
Applicable standards	JIS C5101 - 1, - 4 (IEC 60384 - 1, - 4)														

### Outline Drawing

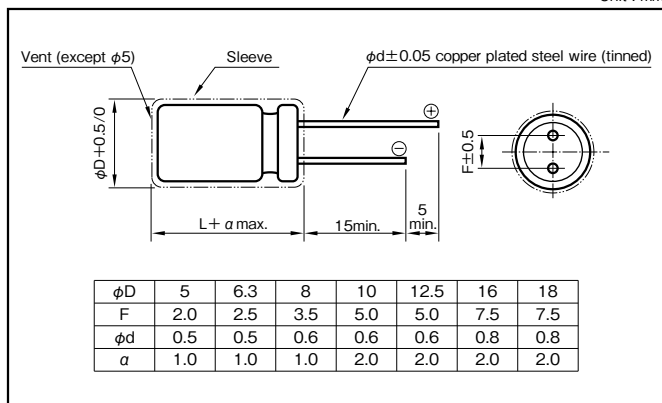

### Coefficient of Frequency for Rated Ripple Current

Rated Capacitance (µF)	Frequency (Hz)					
	50 - 60	120	1k	10k	100k	
100 to 220	0.8	1	1.2	1.3	1.4	
330 to 1000	0.8	1	1.2	1.2	1.3	
2200 to 15000	0.8	1	1.1	1.1	1.1	

Product code system : 16V3300µF (\*For general product)

RS*	RW5	332	M	1E	G25		T
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Lead-forming and packing code	Additional code

For details, refer to the various "Product Code System" pages.

### Standard Ratings

Rated voltage (V)	Item	16 (1E)			25 (1T)		
		Case φD×L (mm)	Size code	Rated ripple current (mArms)	Case φD×L (mm)	Size code	Rated ripple current (mArms)
100	—	—	—	—	5×11.5	C11	125
	220	6.3×11.5	D11	190	6.3×11.5	D11	200
	330	6.3×11.5	D11	225	8×12	E12	310
	470	8×12	E12	323	10×12.5	F12	429
	1000	10×12.5	F12	500	10×16	F16	610
2200	10×20	F20	710	12.5×25	G25	1180	
				16×20	J20	1230	
				18×16	K16	1200	
3300	12.5×25	G25	1200	16×25	J25	1440	
	16×20	J20	1250	18×20	K20	1400	
4700	16×25	J25	1500	16×25	J25	1570	
	18×20	K20	1460	18×20	K20	1530	
6800	16×25	J25	1600	16×35.5	J35	1850	
	18×20	K20	1560	18×31.5	K31	1870	
10000	16×35.5	J35	1930	18×40	K40	2000	
15000	18×40	K40	2210	—	—	—	

(Note) Rated ripple current : 105°C, 120Hz

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

## Miniature Bipolar Capacitors for Audio

GREEN CAP For Audio



Marking color : Gold print on a black sleeve


- The newly developed audio use foil and special electrolyte makes clear and far-carrying sound a reality.
- All lead wires are copper plated steel wires.



### Specifications

Item	Performance									
Category temperature range (°C)	-40 to +85									
Tolerance at rated capacitance (%)	±20 (20°C, 120Hz)									
Leakage current (µA) (max.)	0.03CV + 3 (after 5 minutes) C : Rated capacitance (µF); V : Rated voltage (V) (20°C)									
Tangent of loss angle (tanδ)	Rated voltage (V)	6.3	10	16	25	35	50	63	100	
	tanδ (max.)	0.24	0.20	0.16	0.15	0.14	0.12	0.10	0.09	
0.02 is added to every 1000µF increase over 1000µF. (20°C, 120Hz)										
Characteristics at high and low temperature	Rated voltage (V)	6.3	10	16	25	35	50	63	100	
	Impedance ratio (max.)	Z-25°C/Z+20°C	4	3	2	2	2	2	2	2
0.5 for -25°C, 1 for -40°C are added to every 1000µF increase over 1000µF. (120Hz)										
Endurance (85°C) (Applied ripple current)	Test time	2000 hours (with the polarity inverted every 250 hours)								
	Leakage current	The initial specified value or less								
	Percentage of capacitance change	Within ±20% of initial value								
	Tangent of the loss angle	150% or less of the initial specified value								
Applicable standards	JIS C5101 - 1, - 4 1998 (IEC 60384 - 1, - 4)									

### Outline Drawing

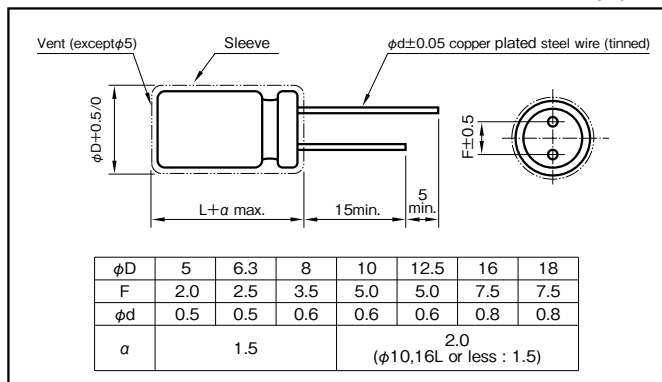

### Coefficient of Frequency for Rated Ripple Current

Rated voltage (V)	Frequency (Hz)			
	50 · 60	120	1k	10k · 100k
6.3 to 16	0.8	1	1.1	1.2
25 to 35	0.8	1	1.5	1.7
50 to 100	0.8	1	1.6	1.9

### Product code system : 10V1000µF (\*For general product)

RS*	RBD	102	M	1L	G20		T
Category code	Series code	capacitance code	Cap tol. code	Voltage code	Size code	Lead-forming and packing code	Additional code

For details, refer to the various "Product Code System" pages.

### Size code

Case	Size code	Case	Size code	Case	Size code	Case	Size code
φD×L (mm)		φD×L (mm)		φD×L (mm)		φD×L (mm)	
5×11	C11	10×12.5	F12	12.5×20	G20	16×31.5	J31
6.3×11	D11	10×16	F16	12.5×25	G25	18×35.5	K35
8×11.5	E11	10×20	F20	16×25	J25		

### Standard Ratings

Rated voltage (V)	6.3 (1J)		10 (1L)		16 (1E)		25 (1T)		35 (1G)		50 (1U)		63 (4E)		100 (1H)	
	Case	Rated ripple current (mA <sub>rms</sub> )	Case	Rated ripple current (mA <sub>rms</sub> )	Case	Rated ripple current (mA <sub>rms</sub> )	Case	Rated ripple current (mA <sub>rms</sub> )	Case	Rated ripple current (mA <sub>rms</sub> )	Case	Rated ripple current (mA <sub>rms</sub> )	Case	Rated ripple current (mA <sub>rms</sub> )	Case	Rated ripple current (mA <sub>rms</sub> )
1	—	—	—	—	—	—	—	—	—	—	5×11	14	—	—	5×11	16
2.2	—	—	—	—	—	—	—	—	—	—	5×11	21	5×11	23	5×11	24
3.3	—	—	—	—	—	—	—	—	—	—	5×11	26	5×11	28	6.3×11	34
4.7	—	—	—	—	—	—	5×11	28	5×11	28	5×11	31	5×11	34	6.3×11	41
10	—	—	—	—	5×11	39	5×11	40	5×11	42	5×11	45	6.3×11	57	8×11.5	70
22	—	—	5×11	52	5×11	58	5×11	60	6.3×11	71	6.3×11	77	8×11.5	89	10×16	136
33	5×11	58	5×11	63	5×11	71	6.3×11	84	6.3×11	87	8×11.5	111	10×12.5	144	10×20	181
47	5×11	69	5×11	75	6.3×11	97	6.3×11	100	8×11.5	122	10×12.5	157	10×16	188	12.5×20	248
100	6.3×11	115	6.3×11	126	8×11.5	167	10×12.5	204	10×12.5	212	10×20	273	12.5×20	343	16×25	458
220	8×11.5	202	8×11.5	221	10×12.5	294	10×16	332	10×20	375	12.5×25	506	16×25	645	18×35.5	837
330	8×11.5	247	10×12.5	322	10×16	394	10×20	444	12.5×20	526	12.5×25	620	—	—	—	—
470	10×12.5	350	10×16	420	10×20	513	12.5×20	607	12.5×25	685	16×25	861	—	—	—	—
1000	10×20	611	12.5×20	767	12.5×25	935	16×25	1120	16×31.5	1270	—	—	—	—	—	—
2200	12.5×25	1090	16×25	1380	16×31.5	1660	—	—	—	—	—	—	—	—	—	—
3300	16×25	1490	16×31.5	1760	—	—	—	—	—	—	—	—	—	—	—	—
4700	16×31.5	1880	18×35.5	2280	—	—	—	—	—	—	—	—	—	—	—	—

(Note) Rated ripple current : 85°C, 120Hz

NOTE : Design, Specifications are subject to change without notice. It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

## 1 General Description of Aluminum Electrolytic Capacitors

### 1-1 The Principle of Capacitor

The principle of capacitor can be presented by the principle drawing as in Fig.1-1.

When a voltage is applied between the metal electrodes placed opposite on both surfaces of a dielectric, electric charge can be stored proportional to the voltage.

$$Q = C \cdot V$$

Q : Quantity of electricity (C)

V : Voltage (V)

C : Capacitance (F)




Fig.1-1

C, called the capacitance of capacitor, is expressed by the following expression with the electrode area S[m<sup>2</sup>], the electrode spacing t [m] and the dielectric constant of dielectric “ε”:

$$C[F] = \epsilon_0 \cdot \epsilon \cdot \frac{S}{t}$$

ε<sub>0</sub> : Dielectric constant in vacuum (=8.85×10<sup>-12</sup>F/m)

The dielectric constant of an aluminum oxide film is 7 to 8. Larger capacitances can be obtained by enlarging the electrode area S or reducing t.

Table 1-1 shows the dielectric constants of typical dielectrics used in the capacitor. In many cases, capacitor names are determined by the dielectric material used, for example, aluminum electrolytic capacitor, tantalum capacitor, etc.

Table 1

Dielectric	Dielectric Constant	Dielectric	Dielectric Constant
Aluminum oxide film	7 to 8	Porcelain (ceramic)	10 to 120
Mylar	3.2	Polystyrene	2.5
Mica	6 to 8	Tantalum oxide film	10 to 20

Although the aluminum electrolytic capacitor is small, it has a large capacitance. It is because the electrode area is roughened by electrochemical etching, enlarging the electrode area and also because the dielectric is very thin.

The schematic cross section of the aluminum electrolytic capacitor is as in Fig.1-2.


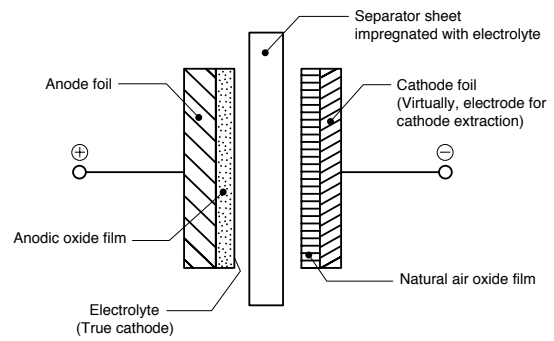


Fig.1-2

### 1-2 Equivalent Circuit of the Capacitor

The electrical equivalent circuit of the aluminum electrolytic capacitor is as presented in the following figure.

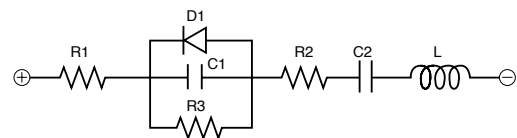

R1 : Resistance of terminal and electrode

R2 : Resistances of anodic oxide film and electrolyte

R3 : Insulation resistance because of defective anodic oxide film

D1 : Oxide semiconductor of anode foil

C1 : Capacity of anode foil

C2 : Capacity of cathode foil

L : Inductance caused by terminals, electrodes, etc.

## 2 About the Life of an Aluminum Electrolytic Capacitor

### 2-1 Estimation of life with minimal ripple current (negligible).

Generally, the life of an aluminum electrolytic capacitor is closely related with its ambient temperature and the life will be approximately the same as the one obtained by Arrhenius' equation.

$$L = L_0 \times 2^{\left(\frac{T_0 - T}{10}\right)} \dots\dots\dots(1)$$

Where L : Life at temperature T

L<sub>0</sub> : Life at temperature T<sub>0</sub>

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

### 2-2 Estimation of life considering the ripple current.

The ripple current affects the life of a capacitor because the internal loss (ESR) generates heat. The generated heat will be :

$$P = I^2R \dots\dots\dots(2)$$

Where I : Ripple current (Arms)  
R : ESR ( $\Omega$ )


With increase in the temperature of the capacitor:

$$\Delta T = \frac{I^2 \times R}{A \times H} \dots\dots\dots(3)$$

Where  $\Delta T$  : Temperature increase in the capacitor core(deg.)

I : Ripple current (Arms)  
R : ESR ( $\Omega$ )  
A : Surface area of the capacitor ( $\text{cm}^2$ )  
H : Radiation coefficient (Approx. 1.5 to 2.0  $\times 10^{-3} \text{W/cm}^2 \times ^\circ\text{C}$ )

The above equation (3) shows that the temperature of a capacitor increases in proportion to the square of the applied ripple current and ESR, and in inverse proportion to the surface area. Therefore, the amount of the ripple current determines the heat generation, which affects the life. The value of  $\Delta T$  varies depending on the capacitor types and operating conditions. The usage is generally desirable if  $\Delta T$  remains less than  $5^\circ\text{C}$ . The measuring point for temperature increase due to ripple current is shown below ;



Test results:

(1) The life equation considering the ambient temperature and the ripple current will be :

$$L = L_d \times 2^{\left(\frac{T_0 - T}{10}\right)} \times K^{\left(\frac{-\Delta T}{10}\right)} \dots\dots\dots(4)$$

Where  $L_d$  : Life at DC operation (h)  
K : Ripple acceleration factor  
(K=2, within allowable ripple current)  
(K=4, if exceeding allowable ripple current)  
 $T_0$  : Upper category temperature ( $^\circ\text{C}$ )  
T : Operating temperature ( $^\circ\text{C}$ )  
 $\Delta T$  : Temperature increase at capacitor core (deg.)

(2) The life equation based on the life with the rated ripple current applied under the maximum guaranteed temperature will be a conversion of the above equation (4), as below :

$$L = L_r \times 2^{\left(\frac{T_0 - T}{10}\right)} \times K^{\left(\frac{\Delta T_0 - \Delta T}{10}\right)} \dots\dots\dots(5)$$

Where  $L_r$  : Life at the upper category temperature with the rated ripple current (h)

$\Delta T_0$  : Temperature increase at capacitor core, at the upper category temperature (deg.)

(3) The life equation considering the ambient temperature and the ripple current will be a conversion of the above equation (5), as below :

$$L = L_r \times 2^{\left(\frac{T_0 - T}{10}\right)} \times K^{\left\{1 - \left(\frac{I}{I_0}\right)^2\right\}} \times \frac{\Delta T_0}{10} \dots\dots\dots(6)$$

Where  $I_0$  : Rated ripple current at the upper category temperature (Arms)

I : Applied ripple current (Arms)

$\Delta T_0$  of each category highest temperature

Aluminum Electrolytic Capacitors	<table border="0"> <tr><td>85</td><td>: 10deg</td></tr> <tr><td>105 to 135</td><td>: 5deg</td></tr> <tr><td>150</td><td>: 3deg</td></tr> </table>	85	: 10deg	105 to 135	: 5deg	150	: 3deg
85	: 10deg						
105 to 135	: 5deg						
150	: 3deg						
Polymer hybrid type aluminum Electrolytic Capacitors	<table border="0"> <tr><td>105</td><td>: 15deg</td></tr> <tr><td>125</td><td>: 10deg</td></tr> <tr><td>135</td><td>: 10deg</td></tr> </table>	105	: 15deg	125	: 10deg	135	: 10deg
105	: 15deg						
125	: 10deg						
135	: 10deg						

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.


Since it is actually difficult to measure the temperature increase at the capacitor core, the following table is provided for conversion from the surface temperature increase to the core temperature increase.

Table 2-1

Case diameter	~10	12.5~16	18	20~22	25	30	35
Core / Surface	1.1	1.2	1.25	1.3	1.4	1.6	1.65

The life expectancy formula shall in principle be applied to the temperature range between the ambient temperature of +40°C and upper category temperature. The expected life time shall be about fifteen years at maximum as a guide in terms of deterioration of the sealant.

(Fig. 2-1 Life Expectancy Chart)

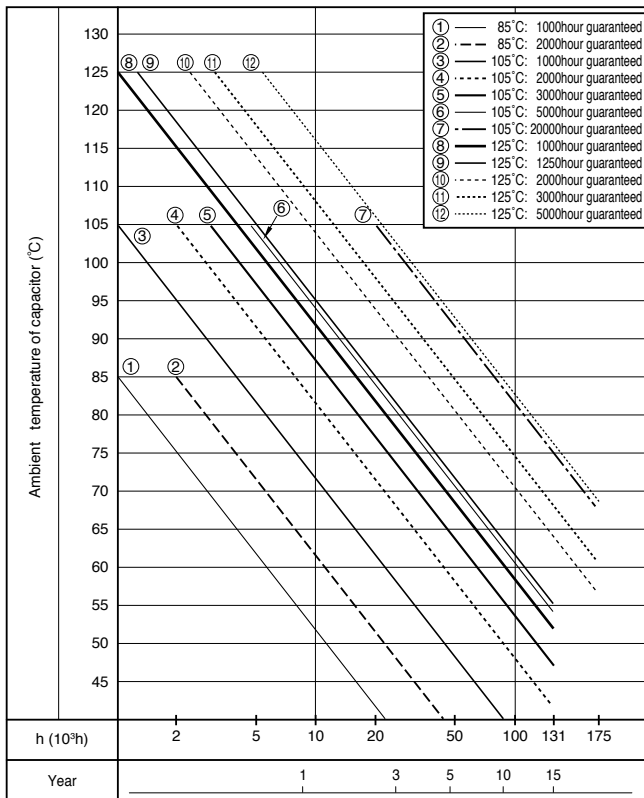


NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

### 3 To calculate Balance when connecting in series

#### 3-1 Circuit layout

Circuit for connecting two capacitors (C1, C2) in series and equivalent circuit can be illustrated as below figure. Formula to calculate a balance resistance  $R_B$  of below figure is shown as follows.

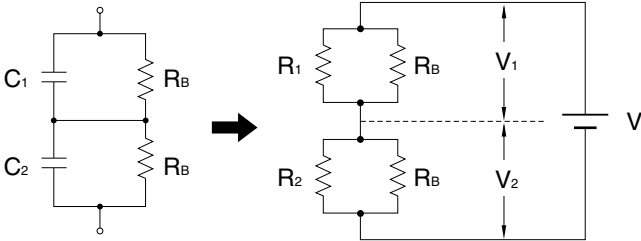

Following are the preconditions of the circuit.

- ①  $V_2$  shall be the rated voltage ( $=V_0$ ). ( $V_1 < V_2$ )
- ②  $V$  shall be a times  $V_0 \times 2$ .  $V = 2aV_0$  ( $a < 1$ )
- ③  $R_2$  shall equal  $R_1 \times b$ . ( $b < 1$ ) (1)

#### 3-2 Formulas to calculate $[R_B]$

3-2-1 Following formula can be established from balanced condition.

$$V_1 \left[ \frac{1}{R_1} + \frac{1}{R_B} \right] = V_2 \left[ \frac{1}{R_2} + \frac{1}{R_B} \right] \quad (2)$$

3-2-2 Following formula can be established from preconditions.

$$V_2 \leq V_0 \quad (3)$$

$$V_1 = V - V_2 \quad (4)$$

$$= 2aV_0 - V_2 \quad (4')$$

3-2-3 Put formulas (1), (3) and (4') in formula (2).

$$(2aV_0 - V_2) \left[ \frac{R_1 + R_B}{R_1 \times R_B} \right] = V_2 \left[ \frac{bR_1 + R_B}{bR_1 \times R_B} \right]$$

$$2abV_0(R_1 + R_B) = V_2 \{b(R_1 + R_B) + bR_1 + R_B\}$$

$$2ab(R_1 + R_B) \leq 2bR_1 + (1+b)R_B$$

Accordingly, balance resistance  $R$  shall be the following formula.

$$R_B \leq 2bR_1 \frac{(1-a)}{(2a-1) \times b-1} \quad (5)$$

#### 3-3 Calculation Example

Calculate the value of the balance resistance in the case of connecting two 400V 470 $\mu$ F ( LC standard value : 1.88mA) capacitors in series.

$$R_1 = \frac{400(V)}{1.88(mA)} = 213(k\Omega)$$

If  $a=0.8$ ,  $400(V) \times 2 \times 0.8 = 640(V)$  as an impressed voltage.

If  $b=2$ ,  $R_2 = b R_1 = 426(k\Omega)$ ,  $LC = 0.94(mA)$ .

Balance resistance  $R_B$  will be.

$$R_B \leq 2 \times 2 \times 213(k\Omega) \frac{(1-0.8)}{(2 \times 0.8) \times 2 - 1} = 852(k\Omega)$$

### 4 Regarding Recovery Voltage

• After charging and then discharging the aluminum electrolytic capacitor, and further causing short-circuit to the terminals and leave them alone, the voltage between the two terminals will rise again after some interval. Voltage caused in such case is called recovery voltage. Following is the process that causes this phenomenon :

- When the voltage is impressed on a dielectric, electrical transformation will be caused inside the dielectric due to dielectric action, and electrification will occur in positive-negative opposite to the voltage impressed on the surface of the dielectric. This phenomenon is called polarization action.
- After the voltage is impressed with this polarization action, and if the terminals are discharged till the terminal voltage reaches 0 and are left open for a while, an electric potential will arise between the two terminals and thus causes recovery voltage.
- Recovery voltage comes to a peak around 10 to 20 days after the two terminals are left open, and then gradually declines. Recovery voltage has a tendency to become bigger as the component (stand-alone base type) becomes bigger.
- If the two terminals are short-circuited after the recovery voltage is generated, a spark may scare the workers working in the assembly line, and may put low-voltage driven components (CPU, memory, etc.) in danger of being destroyed. Measures to prevent this is to discharge the accumulated electric charge with resistor of about 100 to 1k $\Omega$  before using, or ship out by making the terminals in short-circuit condition by covering them with an aluminum foil at the production stage. Please consult us for adequate procedures.

### 5 Electrode Foil Development Technology

#### 5-1 Corrosion inhibition of cathode foil

Inactive treatment is implemented to ensure long life by inhibiting natural corrosion of the cathode foil. Fig. 3-1 shows its effects with values of the polarization resistance inversely proportional to the corrosion rate using the AC impedance method (FRA). This indicates that the cathode foil used in the High reliability capacitors has the polarization resistance higher than that of the conventional capacitors owing to corrosion inhibition.

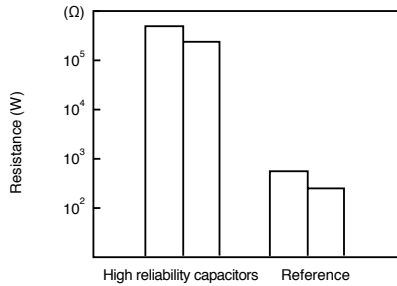


Fig. 3-1

#### 5-2 Sealing material permeability of electrolyte

To ensure long life, a low permeable lactone solvent for the sealing material is used as the main solvent of the electrolyte of the High reliability capacitor. Fig. 3-2 shows the test results on the permeability obtained by changing the weight of the capacitors produced with different types of electrolytes at a high temperature.

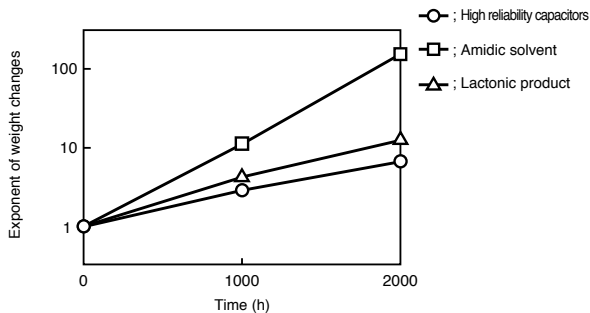


Fig. 3-2

#### 5-3 Airtightness of sealing material

Since the electrolyte is stable for hours, the key element for capacitor's life is the sealing material. By optimizing the crosslinking density of the sealing material polymer, the sealing material of the High reliability capacitor attains its long life with electrolyte permeability less than that of the conventional capacitors.

Fig. 3-3 shows the test results on the airtightness of the sealing material obtained by changing the weight of the capacitors at a high temperature, producing capacitors with the conventional sealing material and improved one both containing the electrolyte used in the High reliability capacitor.

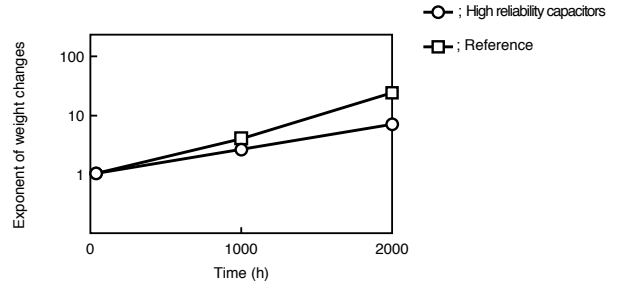


Fig. 3-3

#### 5-4 Long-time stability of electrolyte

The electrolyte used in the High reliability capacitor is stable with low initial resistivity and small secular changes at a high temperature. Fig. 3-4 shows change in resistivity at 105°C.

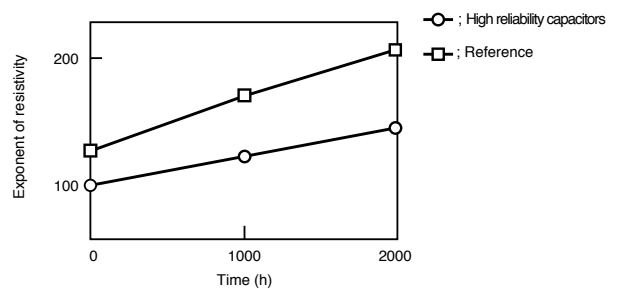


Fig. 3-4

#### 5-5 Dielectric formation voltage and leakage current characteristics of anode foil

To increase the operating life by controlling the gas generation inside capacitor because of 1.5 to 2 times the rated voltage, while that of the previous capacitor is about 1.3 times the rated voltage.

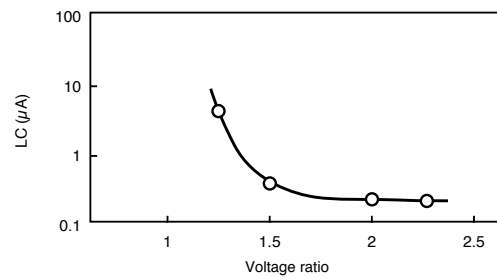


Fig. 3-5

#### 5-6 Lowered ESR of Electrode Foil

To reduce the ESR of electrolytic capacitor, we have improved our chemical conversion technology for anode foil to develop lower ESR electrode foil compared to the conventional product as shown in Fig. 3-6

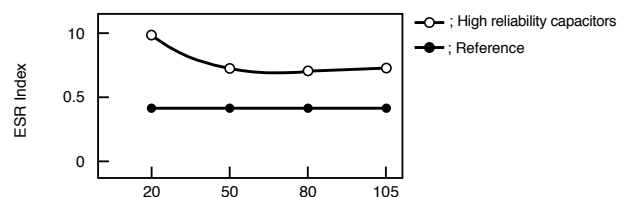


Fig. 3-6 ESR Index of Anode Foil

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.




## Electric Characteristics Data

### 1. CONDUCTIVE POLYMER HYBRID ALUMINUM ELECTROLYTIC CAPACITORS


Series HV1 (guaranteed 105°C)  
Frequency characteristics at 20°C

	Series	Ratings	Case size
●	HV1	25V330μF	φ10×10 L
▲	VVD	25V470μF	φ10×10 L

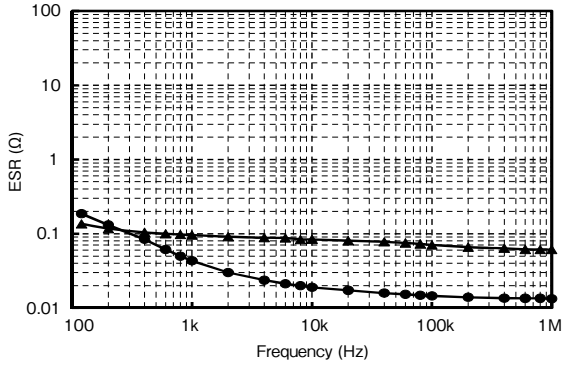


Series HVK (guaranteed 125°C)  
Frequency characteristics at 20°C

	Series	Ratings	Case size
●	HVK	25V100μF	φ6.3×7.7 L
▲	VVT	25V100μF	φ6.3×7.7 L

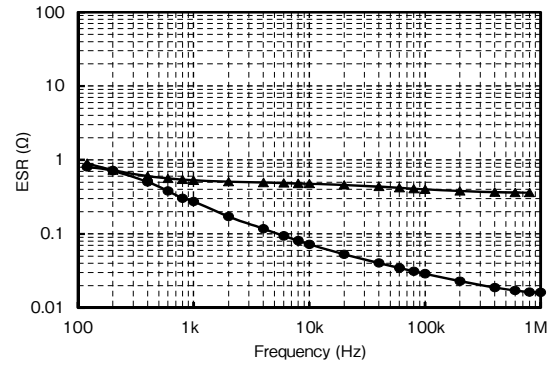


### Temperature Characteristics

	Series	Ratings	Case size
●	HV1	25V330μF	φ10×10 L
▲	VVD	25V470μF	φ10×10 L

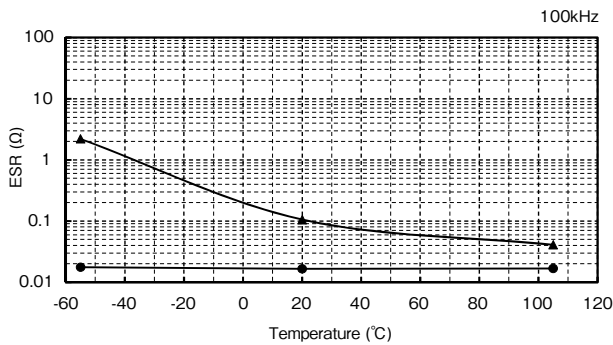


### Temperature Characteristics

	Series	Ratings	Case size
●	HVK	25V100μF	φ6.3×7.7 L
▲	VVT	25V100μF	φ6.3×7.7 L

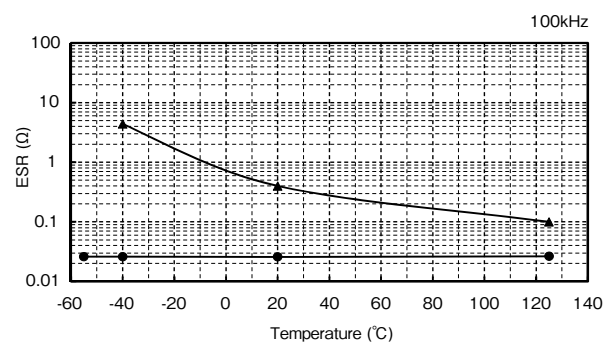


### Endurance (Applied ripple current) at 105°C

	Series	Ratings	Case size	Rated ripple current (100kHz)
●	HV1	25V220μF	φ8×10 L	2300mArms
▲	VVD	25V220μF	φ8×10 L	600mArms

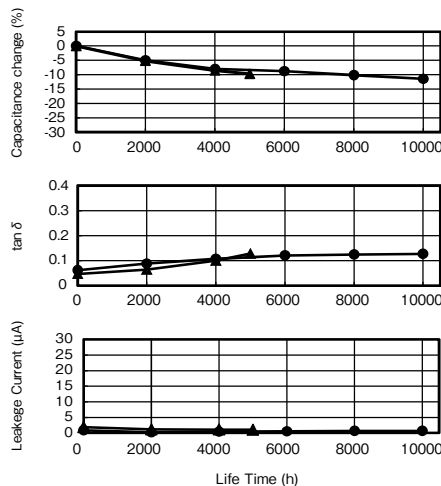

### Endurance (Applied ripple current) at 125°C

	Series	Ratings	Case size	Rated ripple current (100kHz)
●	HVK	35V270μF	φ10×10 L	2000mArms
▲	VVT	35V220μF	φ10×10 L	500mArms

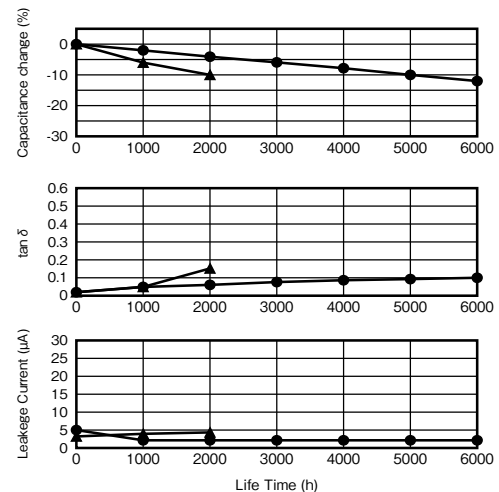


Notice : The measurement values are not guaranteed values, but measurements.


NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

## 2.CHIP TYPE ALUMINUM ELECTROLYTIC CAPACITORS


### Series VZD (guaranteed 105°C) Frequency characteristics at 20°C

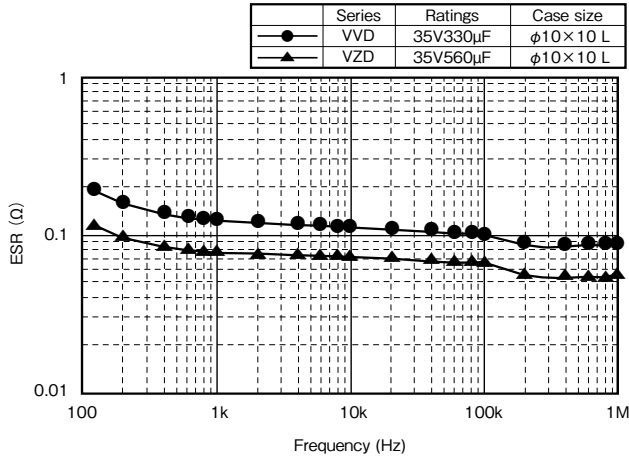


### Series VZF (guaranteed 125°C) Frequency characteristics at 20°C

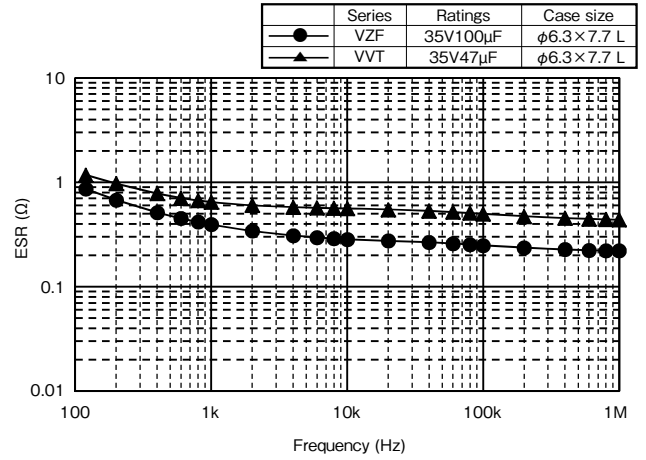


### Temperature Characteristics (20°C, -40°C)

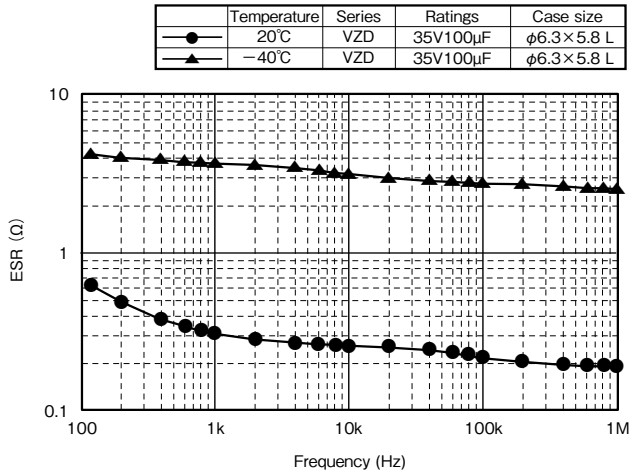


### Temperature Characteristics (20°C, -40°C)

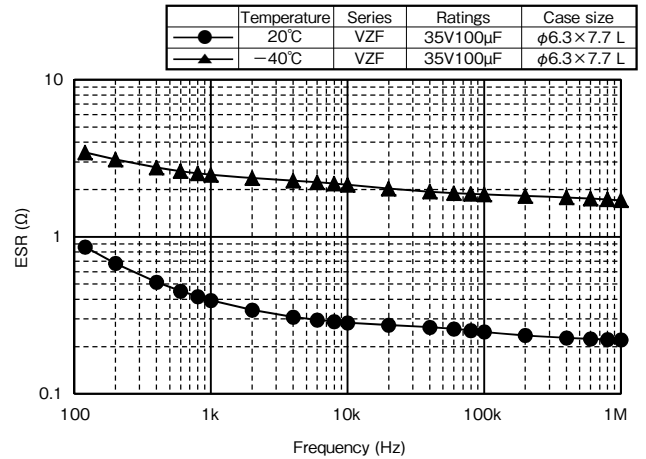

### Endurance at 105°C

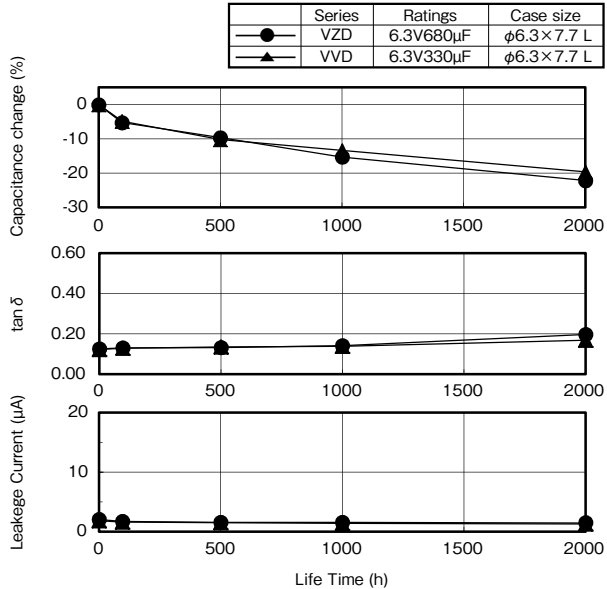

### Endurance at 125°C

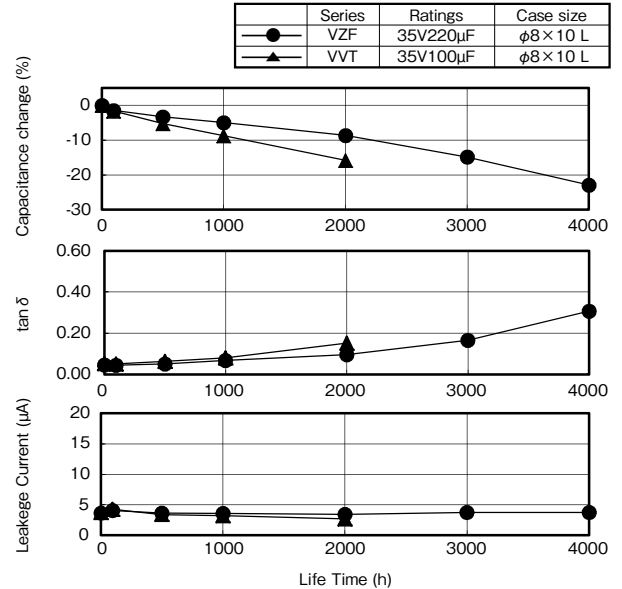


Notice : The measurement values are not guaranteed values, but measurements.

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

### 3. MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS (1)


#### Series RJD (guaranteed 105°C) Frequency characteristics at 20°C

	Series	Rated	Case size
●	RJD	35V1000μF	φ12.5×20 L
▲	RJB	35V680μF	φ12.5×20 L

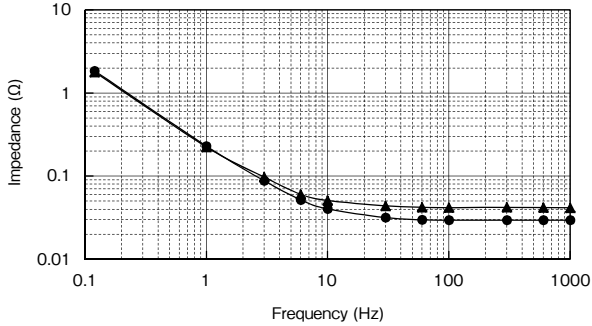


#### Series RJM (guaranteed 105°C) Frequency characteristics at 20°C

	Series	Rated	Case size
●	RJM	35V1000μF	φ12.5×20 L
▲	RJL	35V1000μF	φ12.5×25 L

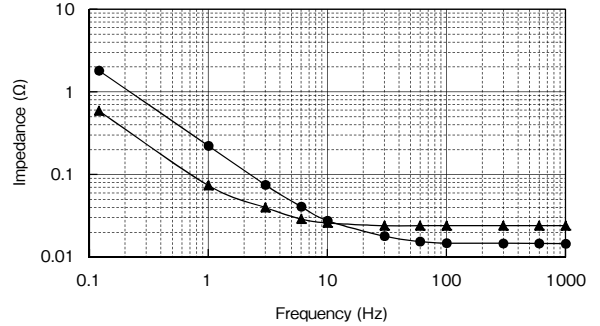


#### Temperature Characteristics

	Series	Rated	Case size
●	RJD	35V1000μF	φ12.5×20 L
▲	RJB	35V680μF	φ12.5×20 L

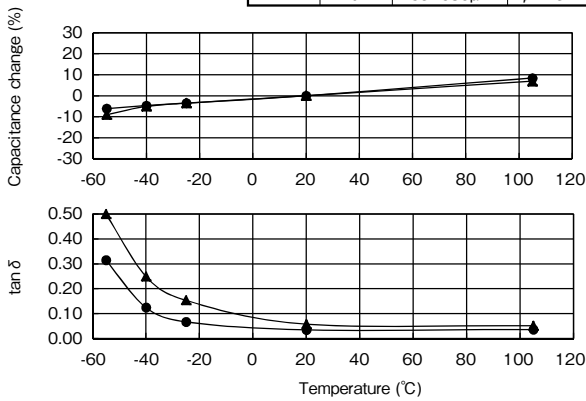


#### Temperature Characteristics

	Series	Rated	Case size
●	RJM	35V1000μF	φ12.5×20 L
▲	RJL	35V1000μF	φ12.5×25 L

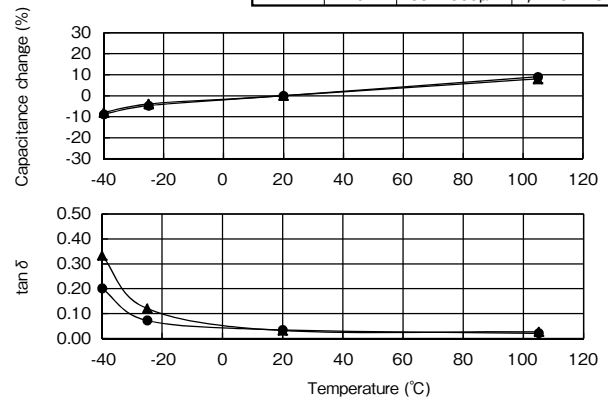


#### Endurance (Applied ripple current) at 105°C

	Series	Rated	Case size	Rated ripple current (100kHz)
●	RJD	35V1000μF	φ12.5×20 L	1700mArms
▲	RJB	35V680μF	φ12.5×20 L	1690mArms

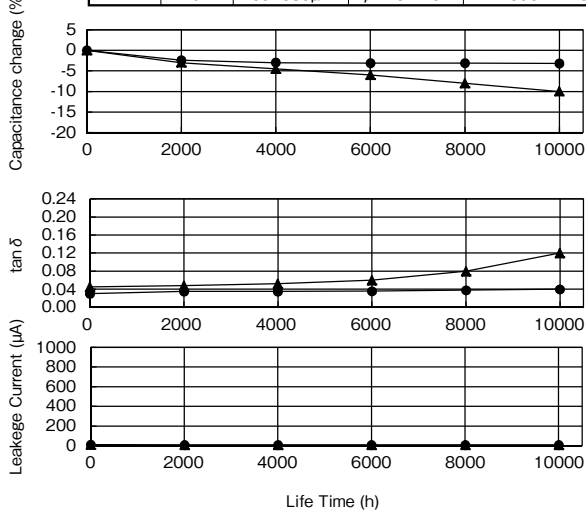

#### Endurance (Applied ripple current) at 105°C

	Series	Rated	Case size	Rated ripple current (100kHz)
●	RJM	35V1000μF	φ12.5×20 L	2600mArms
▲	RJL	35V1000μF	φ12.5×25 L	2230mArms

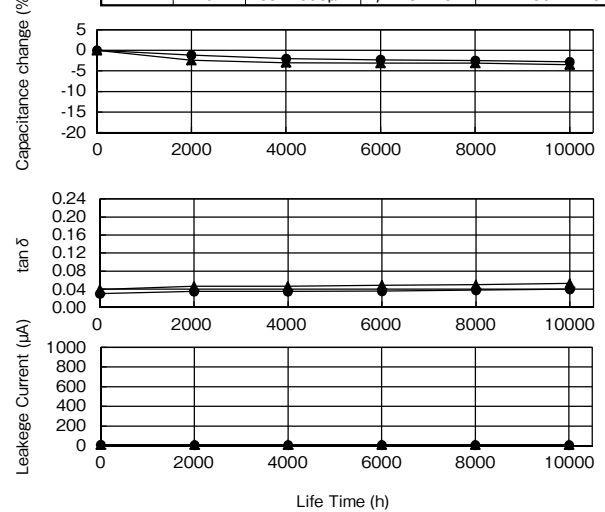


Notice : The measurement values are not guaranteed values, but measurements.

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

## 4. MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS (2)


### Series RKD (guaranteed 125°C) Frequency characteristics at 20°C

Temperature	Series	Rated	Case size
● 20°C	RKD	35V1000μF	φ12.5×25 L
▲ -40°C	RKD	35V1000μF	φ12.5×25 L

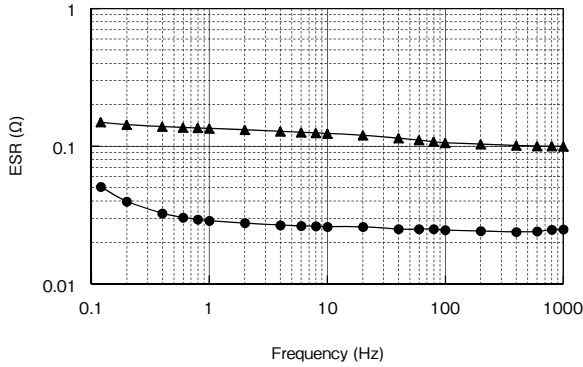


### Series RKC (guaranteed 135°C) Frequency characteristics at 20°C

Temperature	Series	Rated	Case size
● 20°C	RKC	35V6200μF	φ18×35.5 L
▲ -40°C	RKC	35V6200μF	φ18×35.5 L

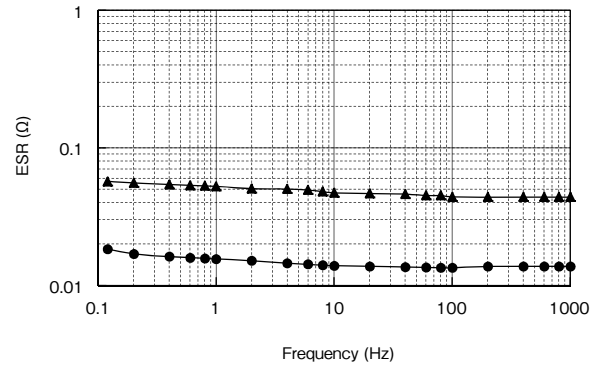


### Temperature Characteristics

Series	Rated	Case size
● RKD	35V1000μF	φ12.5×25 L

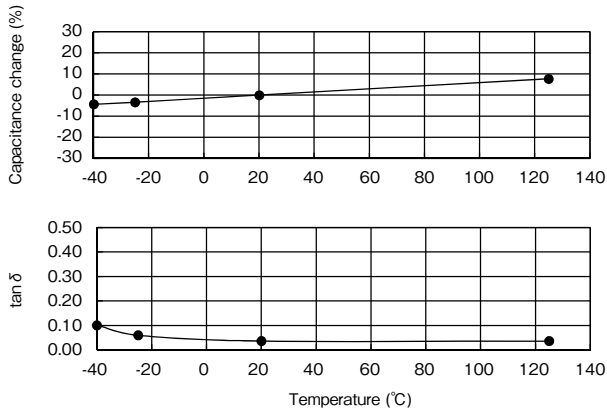


### Temperature Characteristics

Series	Rated	Case size
● RKC	35V6200μF	φ18×35.5 L

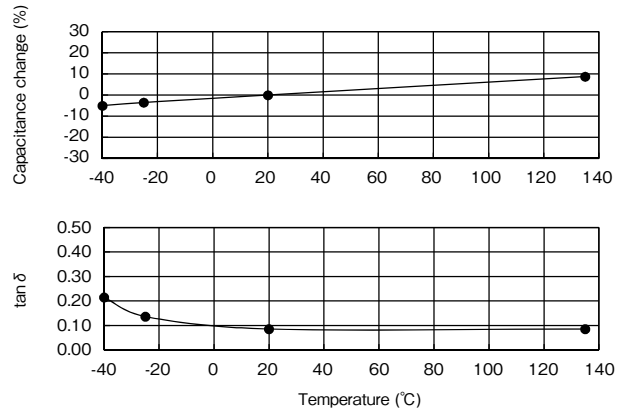


### Endurance (Applied ripple current) at 125°C

Series	Rated	Case size	Rated ripple current (100kHz)
● RKD	35V1000μF	φ12.5×25 L	2400mArms

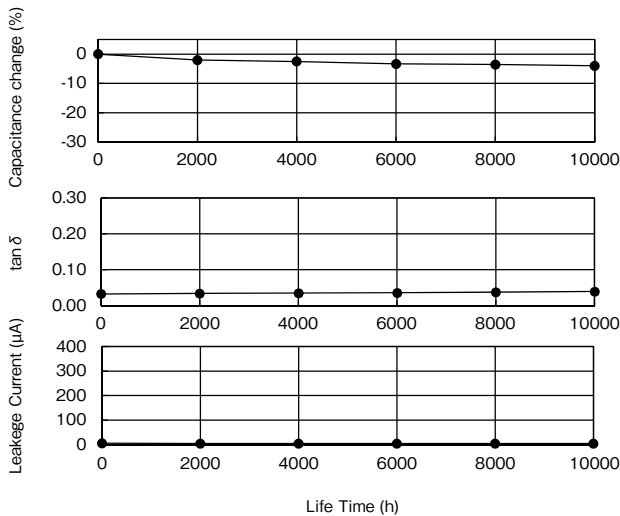

### Endurance (Applied ripple current) at 135°C

Series	Rated	Case size	Rated ripple current (100kHz)
● RKC	35V6200μF	φ18×35.5 L	3750mArms

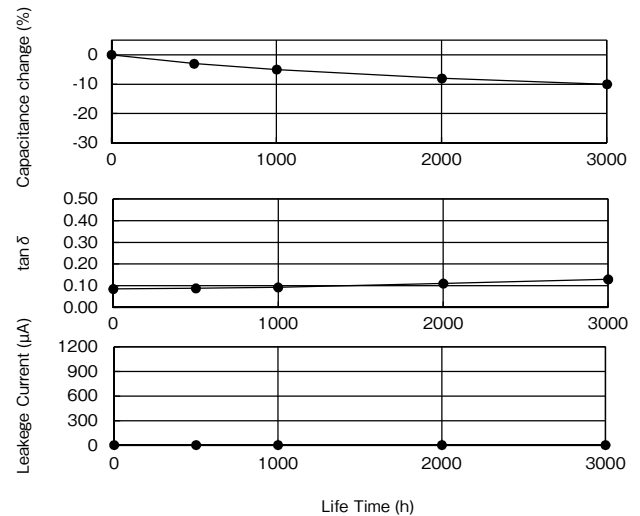

Notice : The measurement values are not guaranteed values, but measurements.

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

**Electric Double Layer capacitors “DYNACAP™”**

Product Code System




The Elna product code is Max.20 digits.

Example) CHC series 5.5V 0.1F φ 13.5x9.5L

New product code  
RSCHC1045R5G09300T

Old product code  
DHC-5R5D104T



1 Product group

R : Energy devices  
(Electrolytic capacitor)

2 Category

S : For general  
A : For automotive (powertrain, safety)  
C : For automotive (body, info)  
M : For medical  
(international classification III)  
L : For medical  
(international classification I, II)

6-8 Rated capacitance code

The code denoting nominal capacitance shall consist of three numerals.  
The first and second numerals shall represent the significant figures of nominal capacitance in the unit of microfarad (μF), And the third numeral shall represent the number of zeros following the significant figures.  
Example

Rated capacitance (F)	Code
0.047	473
0.1	104
0.2	204
0.22	224
0.33	334
0.47	474
0.68	684
1	105
1.5	155
2.7	275
3.3	335
4.7	475
5.6	565
6.8	685
10	106
15	156
22	226
25	256
33	336
40	406
50	506
100	107
200	207
300	307

9-11 Max. operating voltage code

voltage (V)	Code
2.5	2R5
2.7	2R7
3.0	3R0
3.3	3R3
3.6	3R6
5.0	5R0
5.5	5R5

3-5 Series code

Coin type

old code	New code
DVN	CVN
DVL	CVL
DVS	CVS
DB	CB1
DBN	CBN
DBJ	CBJ
DBS	CBS
DX	CX1
DXN	CXN
DXJ	CXJ
DXS	CXS
DH	CH1
DHL	CHL
DHC	CHC
DS	CS1
DSK	CSK

12 Diameter code

D(mm)	Code
6.3	D
6.8	D
8	E
10	F
11.5	F
12.5	G
13.5	G
16	J
18	K
19	K
21.5	L
25	N
35	Q

13-14 Length code

L(mm)	Code
1.4	01
2.1	02
5	05
7.5	07
8	08
8.5	08
9.5	09
10.5	10
12	12
13	13
14	14
20	20
20.5	20
25	25
30	30
31.5	31
35	35
35.5	35
40	40
50	50

\* Size of DZP refer to the series page.

Cylindrical type

Lead type

DZ	DZ1
DZH	DZH
DZN	DZN
DDU	DDU
DZP	DZP

Snap-in type

DZ	GZ1
DZH	GZH
DZN	GZN

15-17 Lead forming and Packing code

Coin type

Standard packing			
Series code	Case size	Code	packing
DV □	φ 12.5	012	Taping
DX □	φ 11.5, φ 19.0	013	Plastic bag
DB □	φ 13.5	014	Plastic bag
DH □	φ 21.5	015	Small box
DS □	φ 6.8x1.4L	004	Taping
	φ 6.8x2.1L	008	Taping

18-20 Additional code

Example

Code	Contents
T	Sn 100% plated

\* Please contact us for details.

Cylindrical cell lead type

Standard packing code	
Long lead	300

Cylindrical cell snap in type

Standard packing code	
	001

\* Please contact us for lead forming, cutting, taping and special packaging.

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

## ■ Type List for DYNACAP™

★ : New series

☆ : Upgrade

Category	Series	Category temp. range °C		Max.operating voltage V.DC	Capacitance range F	Color of sleeve	Applications	Remarks
		Max.	Min.					
For memory backup	Reflow soldering type	CVN	+ 70	- 25	5.5	0.047 to 0.33	Brown	Ideal for industrial, smart meter, backing up of RTC's for surveillance camera, momentary power assistance of a battery etc.
	Reflow soldering type	CVL	+ 85	- 40	5.5	0.047 to 0.22	Brown	
	Reflow soldering type	CVS	+ 85	- 25	3.6	0.047 to 0.33	Brown	
	Standard type	CB1	+ 70	- 25	5.5	0.047 to 1.5	Indigo	Ideal for backing up of CMOS's, IC's of camera, microcomputers, RAM's, RTC's and the like used in audio, general electronic device, and others.
	Low profile Low ESR type	CBN	+ 70	- 25	5.5	0.047 to 1.5	Indigo	
	Low profile High temperature type	CBJ	+ 85	- 10	5.5	0.047 to 1	Black	
	Low profile Low ESR High temperature type	CBS	+ 85	- 25	3.6	0.047 to 1	Black	
	Miniaturized Standard type	CX1	+ 70	- 25	5.5	0.047 to 1.5	Indigo	
	Miniaturized Low ESR type	CXN	+ 70	- 25	5.5	0.047 to 1.5	Indigo	Ideal for backing up of CMOS's, IC's of camera, microcomputers, RAM's, RTC's and the like used in audio, general electronic device, and others.
	Miniaturized High temperature type	CXJ	+ 85	- 10	5.5	0.047 to 1	Black	
	Miniaturized Low ESR High temperature type	CXS	+ 85	- 25	3.6	0.047 to 1	Black	
	High temperature type	CH1	+ 85	- 25	5.5	0.047 to 1	Indigo	
	Wide temperature range type	CHL	+ 85	- 40	5.5	0.047 to 1	Indigo	Ideal for backing up of CMOS IC's, microcomputers, RAM's, RTC's for smart meter, outdoor equipment, auto motive and industrial.
	High temperature long life type	CHC	+ 85	- 25	5.5	0.047 to 1	Black	
	Reflow soldering Coin type	CS1 (614)	+ 70	- 25	2.5	0.2	Silver	Mountable on board with best suited for mainly memory and time functions as well as memory backup for PDA and DSC.
CSK (614)		+ 60	- 10	3.3	0.2			
CS1 (621)		+ 70	- 25	2.5	0.33			
CSK (621)		+ 60	- 10	3.3	0.33			
For power	Standard type	DZ1 / GZ1	+ 70	- 25	2.5 / 2.7	1 to 200	Black	Ideal for power supplies of LED displays, personal wireless items, backup for power supplies, and the storage battery of solar battery.
	Large capacitance type	DZH / GZH	+ 60	- 25	2.5	22 to 300	Black	
	High power type	DZN / GZN	+ 70	- 25	2.5 / 2.7	1 to 200	Blue	Ideal for actuator of moters and electromagnetic coil drives.
	High power Low temperature type	DDU	+ 70	- 40	2.7	1 to 50	Brown	Ideal for actuator of moters and electromagnetic coil drives.
	High power High voltage tolerance Low temperature type	DUK	+ 65	- 40	3.0	1 to 15	Brown	Ideal for actuator of moters and electromagnetic coil drives.
	Packed type	DZP	+ 70	- 25	5.0	0.47 to 4.7	Blue	Ideal for power supplies of LED displays, personal wireless items, backup for power supplies, and the storage battery of solar battery.

● Some of the series listed in the below table have been removed from the catalogue (discontinued series). Please select from the new series for a designing your (new) application.


Category	Series	Category temp. range °C		Max.operating voltage V.DC	Capacitance range F	Color of sleeve	Applications	Substitute series to recommend	
		Max.	Min.						
For memory backup	Coin type	CC1 (614)	+ 70	- 25	2.5	0.2	Ideal for backing up of pager, solar watches, solar calculators, solar remote control units, camaras and the like.	—	
		CCK (614)	+ 60	- 10	3.3	0.2 to 0.22		—	
		CC1 (621)	+ 70	- 25	2.5	0.22 to 0.33		—	
		CCK (621)	+ 60	- 10	3.3	0.22 to 0.4		—	
	Reflow soldering Coin type	CSK (414)	+ 70	- 10	3.3	0.07 to 0.08	Mountable on board with best suited for mainly memory and time functions as well as memory backup for PDA and DSC.	—	
For power	High power Low temperature type	DU1	+ 65	- 40	2.7	1 to 50	Brown	Ideal for actuator of moters and electromagnetic coil drives.	DDU

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.


Systematized Classification of Electric Double Layer Capacitors

DYNACAP™ "POWERCAP™"

For memory backup

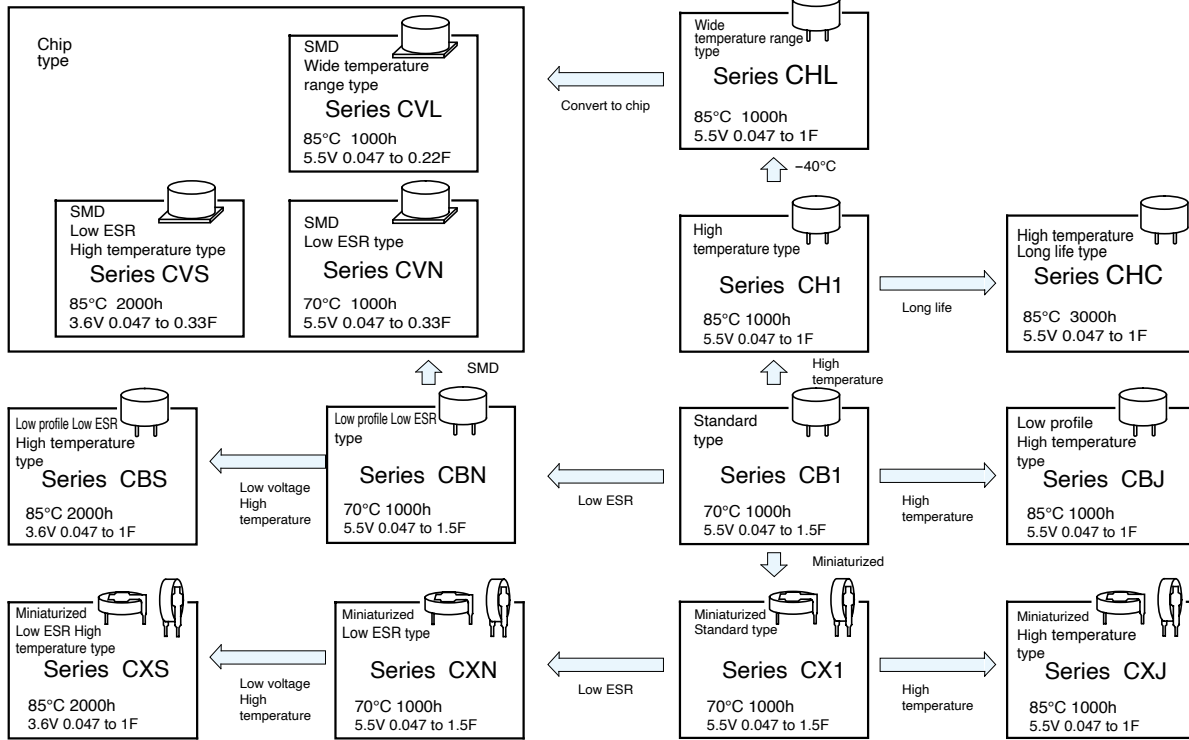

For power & energy

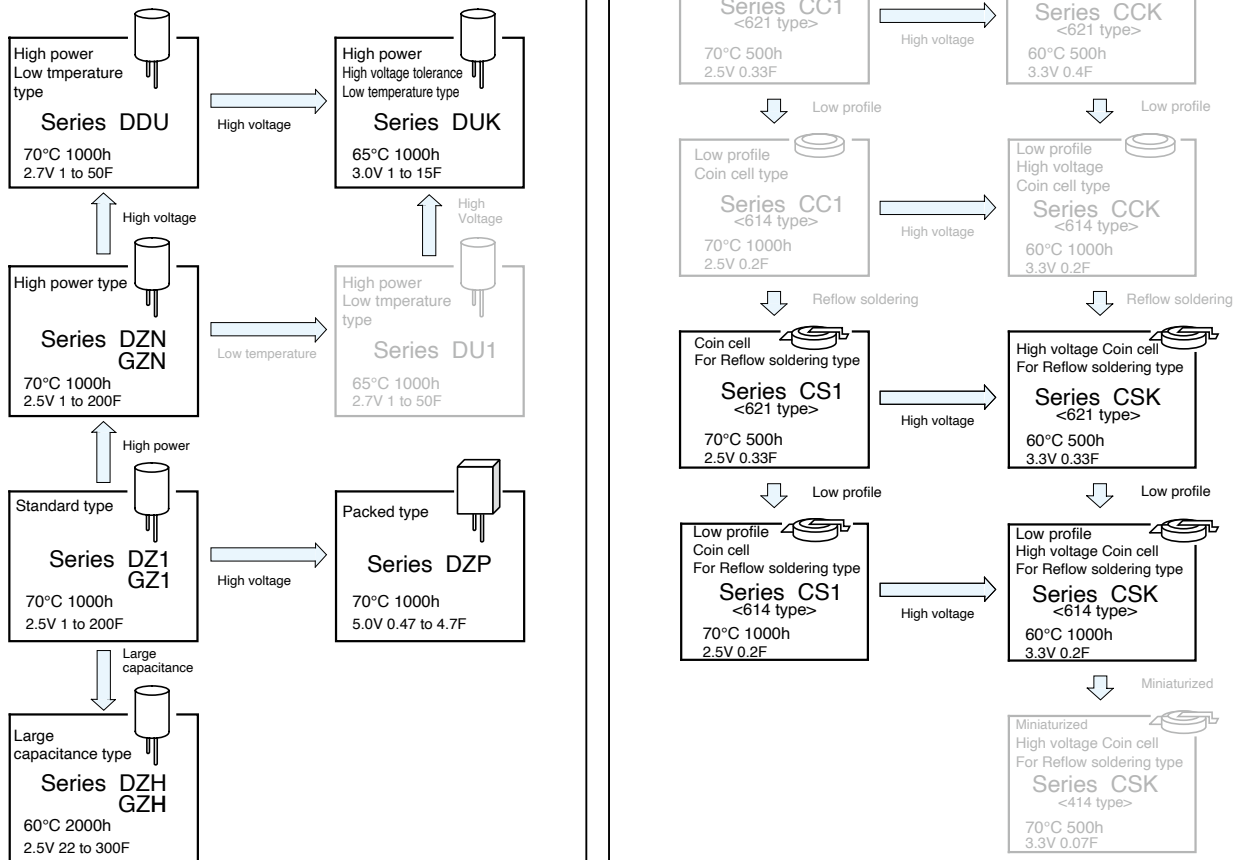

NOTE : Design, Specifications are subject to change without notice. It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.




## Recommended soldering conditions (Lead Free)

- Series CS1, CSK, CVN, CVL, CVS

Reflow soldering conditions.

Profile

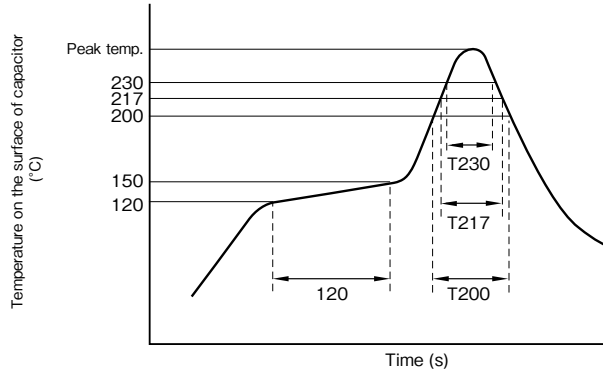

1. Preheating shall be under 150°C within 120 seconds.
2. Peak temperature shall be within the following table.
3. For conditions exceeding the tolerances, consult with us.

T200 : Duration while capacitor head temperature exceeds 200°C (s).

T217 : Duration while capacitor head temperature exceeds 217°C (s).

T230 : Duration while capacitor head temperature exceeds 230°C (s).

The measurement temperature point is the case top.

Series	Size	Peak temp. (5sec or less)	T230	T217	T200	Reflow cycle
CS1 CSK	φ6.8	250°C Max.	20sec. max.	30sec. max.	40sec. max.	2 times or less
CVN CVL CVS	φ12.5	260°C Max.	20sec. max.	30sec. max.	50sec. max.	2 times or less

Attention : Carry out soldering work at low temperature and in the shortest time within above conditions.

Do NOT reflow solder, when cell voltage is above 0.5V.

\* Please consult with us about reflow soldering conditions other than the above.

## Recommended soldering conditions (Lead free)


### ● Electric Double Layer capacitors

(1) Soldering iron conditions

Iron tip temperature should be  $400^{\circ}\text{C} \pm 5^{\circ}\text{C}$  within the duration of 4 seconds.

(2) Flow soldering conditions

The recommendation soldering conditions of the product in which flow soldering is possible are as graph.

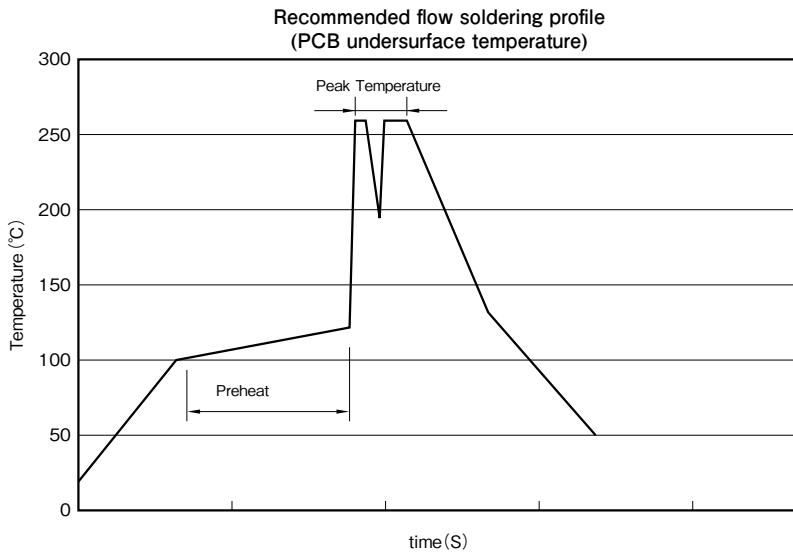


Type	Series	Size	Preheat		Peak	
			Temperature	Time	Temperature	Time
Coin cell	CB1, CBN, CBJ CBS, CX, CXN CXJ, CXS, CH1 CHL, CHC	$\phi 11.5$ to $\phi 21.5$	100 to $110^{\circ}\text{C}$	30sec. max.	$260^{\circ}\text{C}$ Max	5sec. max.
Cylindrical cell	DZ1, DZH, DZN GZ1, GZH, GZN DDU, DUK, DZP	$\phi 6.3$ to $\phi 35$	100 to $130^{\circ}\text{C}$	30 to 60sec.	$260^{\circ}\text{C} \pm 5^{\circ}\text{C}$	10sec. max.

### Cautions when soldering

- (1) Do not dip the capacitor into melted solder.
- (2) Do not flux other part than the terminals.
- (3) If there is a direct contact between the sleeve of the capacitor and the printed circuit pattern or a metal part of another component such as a lead wire, it may cause shrinkage or crack.
- (4) If it is a coin type, please manage so that main part temperature including preheating does not exceed  $90^{\circ}\text{C}$ .
- (5) Please refer to cautions for using and the specification about other notes.


### Carrier tape dimensions (Series CS1, CSK) polarity L

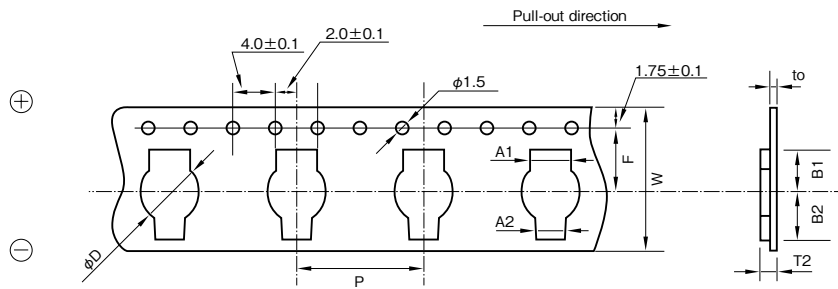

(Unit : mm)

Outside size	W	P	F	A1	A2	B1	B2	T2	to	φD
φ6.8×1.4 to 2.1L	24±0.2	12.0	11.5	4.4	3.4	5.9	6.5	3.2	0.3	6.9

### Reel dimensions




(Unit : mm)

Outside size	W	t
φ6.8×1.4 to 2.1L	26	3

### Packing quantity

Outside size	Quantity
φ6.8×2.1L	1500PCS.
φ6.8×1.4L	1500PCS. to 2000PCS.


### Carrier tape dimensions (Series CVN, CVL, CVS) polarity R

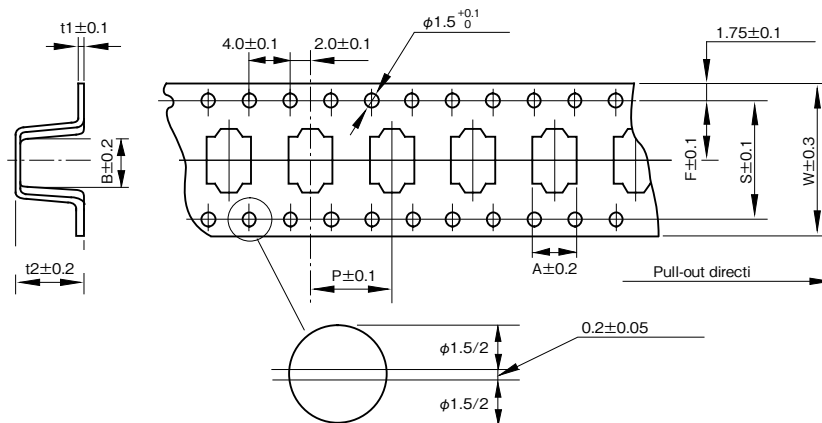

(Unit : mm)

Outside size	W	A	B	P	t2	F	t1	S
φ12.5×10.5L	32	13.4	13.4	24	11	14.2	0.5	28.4
φ12.5× 8.5L	32	13.4	13.4	24	9.5	14.2	0.5	28.4

### Reel dimensions



(Unit : mm)




Outside size	W	t
φ12.5×10.5L	34	3
φ12.5× 8.5L	34	3

### Packing quantity




Outside size	Quantity
φ12.5×10.5L	250pcs.
φ12.5× 8.5L	300pcs.

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

### Standard packing specification of Coin cell type

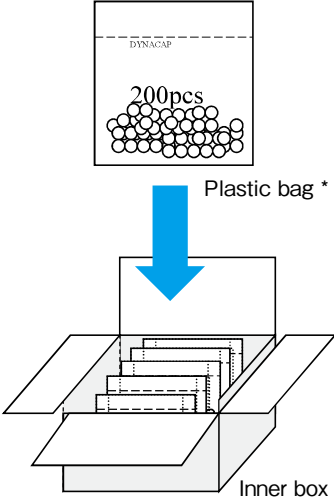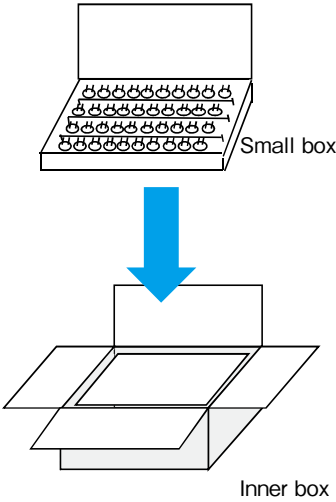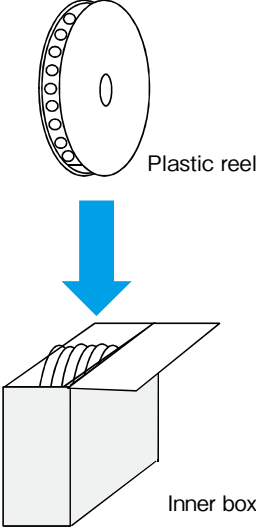Series	<ul style="list-style-type: none"> <li>• CX1, CXJ, CXN, CXS</li> <li>• CB1, CBN, CBJ, CBS, CH1, CHL, CHC (<math>\phi 13.5</math>)</li> </ul>	<ul style="list-style-type: none"> <li>• CB1, CBN, CBJ, CBS, CH1, CHL, CHC (<math>\phi 21.5</math>)</li> </ul>	<ul style="list-style-type: none"> <li>• CS1, CSK (614, 621)</li> <li>• CVN, CVL, CVS</li> </ul>
Packing style	 <p>Plastic bag *</p> <p>Inner box</p>	 <p>Small box</p> <p>Inner box</p>	 <p>Plastic reel</p> <p>Inner box</p>

### Standard packing specification of Cylindrical cell type

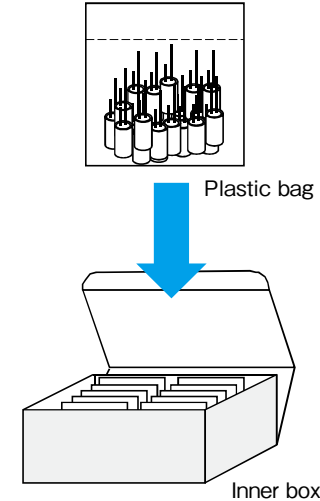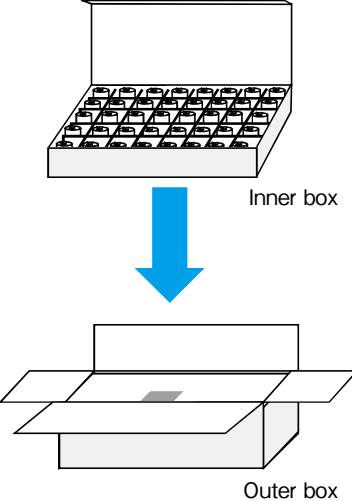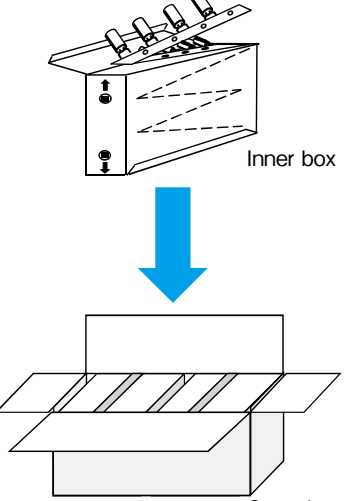Series	<ul style="list-style-type: none"> <li>• DDU, DUK, DZ1, DZN, DZH (<math>\phi 6.3</math> to <math>\phi 18</math>)</li> <li>• DZP</li> </ul>	<ul style="list-style-type: none"> <li>• GZ1, GZN, GZH (<math>\phi 22</math> or more)</li> </ul>	<ul style="list-style-type: none"> <li>• DDU, DUK, DZ1, DZN, DZH (<math>\phi 6.3</math> to <math>\phi 12.5</math>)</li> <li>Taping</li> </ul>
Packing style	 <p>Plastic bag</p> <p>Inner box</p>	 <p>Inner box</p> <p>Outer box</p>	 <p>Inner box</p> <p>Outer box</p> <p>Taping type's box size : refer to specification of aluminum electrolytic capacitors.</p>

Please inquire for details.

## Cautions for Using Electric Double Layer Capacitors (DYNACAP™)

### ■ Usage

#### 1. Electric double layer capacitors (EDLC) use a conductive organic electrolyte.

The use at excessive mounting temperature or exceeding the upper category temperature can cause the electrolyte to leak. Especially, coin and multilayer coin types for the memory backup excluding the DZ1, DZH, DZN, GZ1, GZH, GZN, DDU, DUK, DZP series use a low elastic plastic as the sealant in the cell construction like coin batteries; therefore, avoid using such capacitors in the vicinity of automotive equipment with steep temperature change, and heating element such as motor, relay, transformer, power IC, etc. because of the risk of leakage of electrolyte.

#### 2. Since EDLC is polarized, do not apply a reversed voltage.

EDLC is polarized. If a reversed voltage is applied for a long time, the leakage current will increase abruptly, which may cause a decrease in the capacity, an increase in the internal resistance, and causing leakage or damage to the product in some cases.

#### 3. Do not apply any voltage higher than the Max. operating voltage (this means the surge voltage in the case of short-time charge).

If an overvoltage is applied to the product, the leakage current will increase abruptly and the product will become overheated, which may cause a decrease in the capacity, an increase in the internal resistance, and causing leakage or damage to the product in some cases.

#### 4. Do not use smoothing a power supply ( for absorbing its ripple).

Since the internal resistance of EDLC is high, the product will be overheated if it is used for smoothing a power supply (for absorbing its ripple), which may cause a decrease in the capacity, an increase in the internal resistance, and causing leakage or damage to the product in some cases.

#### 5. Do not use in a circuit where quick charge and discharge are repeated Very often.

In a circuit where quick charge and discharge are repeated very often, the product will become overheated, which may cause a decrease in the capacity, an increase in the internal resistance, and causing leakage or damage to the product in some cases.

Reduce the charge and discharge currents while selecting a product with low internal resistance, and make sure that the product surface temperature does not rise.

#### 6. EDLC life depends heavily on the ambient temperature.

①The lifetime of EDLC is seriously affected by change in ambient temperature. If the temperature is lowered by 10°C, the lifetime will be approximately doubled. Therefore, the product should be used at a temperature lower than the guaranteed maximum value for maximum life.

②If the capacitor is used at a temperature exceeding its maximum guaranteed temperature, not only is its life shortened, but increased vapor pressure of electrolyte or electrochemical reactions may increase the internal pressure, and causing leakage or damage to the product in some cases.

#### 7. Do not use the product in an ambient atmosphere containing waterdrops ( condensation ) or toxic gases.

Although EDLC is sealed, water droplets or toxic gases may do degradation characteristics, a leakage and corrode the lead wires and the case, which may cause a breaking of the wires.

Avoid abrupt temperature changes, which may cause water droplets, resulting in product deterioration and electrolyte leakage.

#### 8. Contact us before connecting the products in series.

A series connection will cause imbalance in the voltage, charged to the capacitors and an overvoltage may be charged to one or more them. This may cause a decrease in the capacity, an increase in the internal resistance and causing leakage or damage to the product in some cases. When using series connection for several capacitors, please derate the applied voltage from the Max. operating voltage or use balancing circuits (bleeder resistor, etc.) to compensate for the imbalance in the applied voltage for each capacitor. Moreover, please ensure the arrangement does not cause temperature fluctuation between capacitors.

#### 9. About vibration.

A terminal blank, a terminal bend, and a crease may occur by adding too much vibration to a capacitor.

Moreover, depending on the case, an EDLC may do degradation of the characteristic, breakage, and a leakage.

When you become too much vibration, please contact us.

#### 10. When used on a double sided printed circuit board, do not overlap the wiring patterns on the mounted part.

A short circuit may be created by certain wiring conditions. Should the electrolyte leaks, the circuit pattern may cause a short circuit, resulting in tracking or migration.

#### 11. Do not keep In high temperature and high humidity atmospheres.

①Avoid high temperature or high humidity or direct rays when storing capacitors.

② Keep the product in a place where the temperature is 5°C to 30°C and the humidity is lower than 60%. Avoid an abrupt temperature change, which may cause condensation or deterioration of the product or liquid leakage. (Recommended storage term: 1 year or less after delivery)

③ Do not store EDLC at a place where there is a possibility that they may get water, salt or oil spill.

④ Do not store EDLC at place where the air contains dense hazardous gas (hydrogen sulfide, sulfuric acid, nitrous acid, chlorine ammonia, etc.).

⑤ Fumigation treatment with toxic gas covering the whole wooden container frames as moth proofing during shipment may leave residual toxic gas.

⑥ Do not store EDLC at a place where it gets ultraviolet ray or radioactive ray.

## 12. Capacitors fitted with a relief valve

① The relief valve is provided with a valve function with part of the case made thin to avoid explosion by increased internal pressure when the capacitor is under abnormal load such as overvoltage or reverse voltage. After activation of the relief valve, the capacitor must be replaced as it does not restore.

② For the capacitors with a case relief valve (series DZ1, DZH, DZN, GZ1, GZH, GZN, DDU, DUK, DZP), provide a void on the top of the relief valve so as not to hamper its activation. Make a void of 2 mm or more for the product of  $\phi 18$  or less in diameter, and a void of 3 mm or more for the product of  $\phi 20$  to  $\phi 35$  mm in diameter on the top.

## 13. Use at a high altitude

The use of capacitors at high altitudes such as on an airplane causes a large difference between the internal pressure of the capacitors and the atmospheric pressure.

However, there is no problem in use under atmospheric pressure up to about an altitude of 10,000 meters.

If the condition is severe like space, please contact us.

## ■ Mounting

### 1. Do not overheat when soldered.

Depending on the type and size of the board, the product may be subjected to overheat, leading to loss of airtightness. This may greatly shorten the product life or cause liquid leakage.

In case of a 1.6mm-thick and single side printed board, for example, keep the following soldering conditions: temperature lower than 260°C, time within 5 seconds (coin type), 10 seconds (Cylindrical type).

When a board thinner than 1.6 mm or multi-layer printed board is used, contact us.

In the case of hand soldering, the iron tip temperature is lower than 400°C, time is shorter than 4 seconds.

The coin types and multilayer coin types excluding the DZ and reflow-compatible coin types use polypropylene as the packing material for sealing and therefore susceptible to excessive heat. Note that the component body temperature shall be controlled so as not to exceed 90°C including preheating.

### 2. When soldering the capacitor to the wiring board, do not attach the body of the capacitor to the circuit board.

If the body of the capacitor is attached directly to the circuit board, the flux or solder can blow through the through holes in the circuit board, negatively impacting the capacitor.

Moreover, the heat influence at the time of soldering can be reduced by floating the body.

### 3. Contact us when cleaning is necessary after soldering.

Certain types of solvents are not compatible and may cause damage.

### 4. Contact us when the product is attached by adhesive bonding.

Certain types of adhesives are not compatible.

Paste bond partially between the product and the board so that the product will not adhere completely to the board.

Do not raise the temperature over the guaranteed value while the bond is hardening.

### 5. Heating conditions of adhesive curing oven

During heating of the adhesive curing oven, application of excessive heat may significantly shorten the product life or cause liquid leakage. Control the body temperature so as not to exceed 90°C during work while setting the allowable atmospheric temperature below 110°C, and allowable heating time within 30 seconds.

For the heating conditions deviating from the above, consult with us providing your temperature profile conditions.

### 6. Be careful not to apply an excessive force to the capacitor body, terminals or lead wires.

① Mount the capacitor while making sure that the terminal spacing of the capacitor and the spacing of the holes in the printed wiring board are aligned.

② If the capacitor body is subjected to stress such as grabbing, falling, bend, pushing or twisting after mounted, its terminals may come off, leading to open, short or liquid leakage.

## ■ Other cautions

### 1. Emergency procedures

If the EDLC overheats or starts to smell, immediately switch off the units main power supply to stop operation.

Keep your face and hands away from the EDLC, since the temperature may be high enough to cause the EDLC to ignite and burn.

### 2. Periodical inspections should be established for the EDLC used in industrial appliances.

The following items should be checked:

① Appearance : Check if there is leakage.

② Electronic performance : Check the leakage current, the electrostatic, the internal resistance and other items described in the catalog or the product specifications.

### 3. Disposing of EDLC

① Punch a hole or crush the EDLC (to prevent explosion) before incineration at approved facility.

② If they are not to be incinerated, bring them to a professional industrial waste disposal company.

### 4. Other notes

Please refer to the following literature for anything not described in the specification or the catalog. (Technical Report of Japan Electronics and Information Technology Industries Association #EIAJ RCR-2370 "Guideline of notabilia for fixed electric double layer capacitors")

**5.5V SMD, Low Resistance Capacitors**

GREEN CAP

SMD

70°C



Marking color : White print on an brown sleeve

- Size :  $\phi 12.5 \times 8.5$ mm, compatible with surface mounting and low ESR.
- Unlike batteries, safe and high reliability without containing active and hazardous substance.
- Unlike batteries, excellent charge and discharge characteristics with no chemical reactions.
- Responds to temperature 260°C during the reflow peek.
- Ideal for industrial, smart meter, backing up of RTC's for surveillance camera, momentary power assistance of a battery etc.

Convert to chip




**Specifications**

Item	Performance				
Category temperature range (°C)	- 25 to +70				
Tolerance at rated capacitance (%)	- 20 to +80				
Internal resistance at 1 kHz	Rated capacitance (F)	0.047	0.1	0.22	0.33
	Internal resistance ( $\Omega$ Max.)	30	30	30	30
Characteristics at high and low temperature	Percentage of capacitance change	Within $\pm 30\%$ of the value at 20°C			
	Internal resistance	Five times or less of the value at 20°C			
Endurance (70°C)	Test time	1000 hours			
	Percentage of capacitance change	Within $\pm 30\%$ of the initial measured value			
	Internal resistance	Four times or less of the initial specified value.			
Shelf life (70°C)	Test time : 1000 hours ; Same as endurance.				
Applicable standards	Conforms to JIS C5160 - 1 (IEC 62391 - 1)				


**Outline Drawing**

Unit : mm

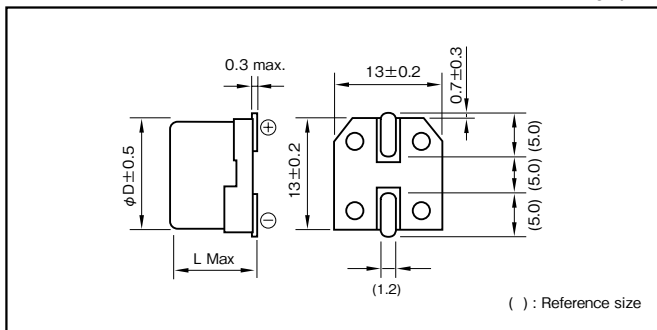

**Recommended land pattern size**

Unit : mm

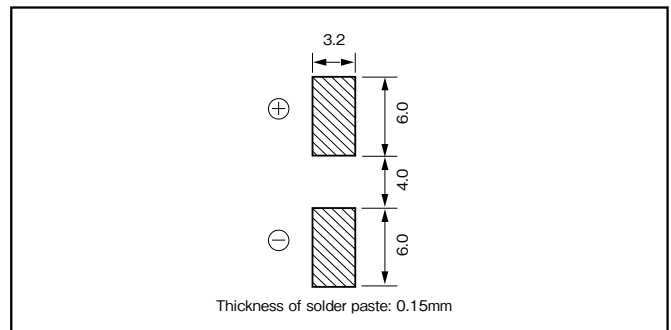

Product code system : 5.5V0.22F (\*For general product)

RS*	CVN	224	5R5	G08	012	T
Category code	Series code	capacitance code	Voltage code	Size code	Taping and packing code	Additional code

Product code is refer to following table and "Product Code System" pages.

**Standard Ratings**

Max. operating voltage (V)	Rated capacitance (F)	ELNA Parts No.	$\phi D \times L$ (mm)
5.5	0.047	RSCVN4735R5G08012T	12.5 × 8.5
5.5	0.1	RSCVN1045R5G08012T	12.5 × 8.5
5.5	0.22	RSCVN2245R5G08012T	12.5 × 8.5
5.5	0.33	RSCVN3345R5G08012T	12.5 × 8.5

- \*soldering conditions are described on Individual page.
- \*It can discharge with 1.5 times as much current (mA) as rated capacitance.

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

**5.5V SMD, Wide Temperature range Capacitors**

GREEN CAP

SMD

85°C



Marking color : White print on an brown sleeve

- Size :  $\phi 12.5 \times 10.5$ mm, compatible with surface mounting.
- Wide temperature range ( $-40$  to  $85^\circ\text{C}$ ), Low ESR.
- Unlike batteries, safe and high reliability without containing active and hazardous substance.
- Unlike batteries, excellent charge and discharge characteristics with no chemical reactions.
- Responds to temperature  $260^\circ\text{C}$  during the reflow peak.
- Ideal for industrial, smart meter, backing up of RTC's for surveillance camera, momentary power assistance of a battery, automotive etc.

Convert to chip




Specifications

Item	Performance			
Category temperature range (°C)	- 40 to +85			
Tolerance at rated capacitance (%)	- 20 to +80			
Internal resistance at 1 kHz	Rated capacitance (F)	0.047	0.1	0.22
	Internal resistance ( $\Omega$ Max.)	45	45	45
Characteristics at high and low temperature	Percentage of capacitance change	Within $\pm 30\%$ of the value at $20^\circ\text{C}$		
	Internal resistance	- $40^\circ\text{C}$ : Seven times or less of the value at $20^\circ\text{C}$ - $85^\circ\text{C}$ : Five times or less of the value at $20^\circ\text{C}$		
Endurance ( $85^\circ\text{C}$ )	Test time	1000 hours		
	Percentage of capacitance change	Within $\pm 30\%$ of the initial measured value		
	Internal resistance	Four times or less of the initial specified value		
Shelf life ( $85^\circ\text{C}$ )	Test time : 1000 hours ; Same as endurance.			
Applicable standards	Conforms to JIS C5160 - 1 (IEC 62391 - 1)			


Outline Drawing

Unit : mm

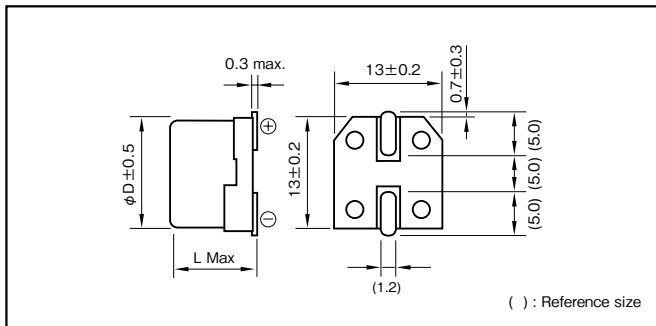

Recommended land pattern size

Unit : mm

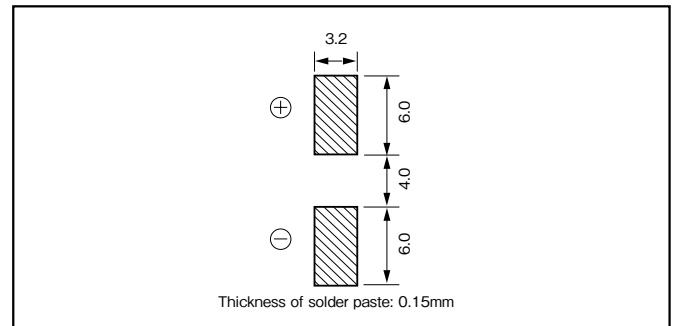

Product code system : 5.5V0.22F (\*For general product)

RS*	CVL	224	5R5	G10	012	T
Category code	Series code	capacitance code	Voltage code	Size code	Taping and packing code	Additional code

Product code is refer to following table and "Product Code System" pages.

Standard Ratings

Max. operating voltage (V)	Rated capacitance (F)	ELNA Parts No.	$\phi D \times L$ (mm)
5.5	0.047	RSCVL4735R5G10012T	12.5 × 10.5
5.5	0.1	RSCVL1045R5G10012T	12.5 × 10.5
5.5	0.22	RSCVL2245R5G10012T	12.5 × 10.5

\*soldering conditions are described on Individual page.

NOTE : Design, Specifications are subject to change without notice. It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.



**3.6V SMD, High Temperature range Capacitors**

GREEN CAP SMD 85°C



Marking color : White print on a brown sleeve

- Size :  $\phi 12.5 \times 8.5$ mm, compatible with surface mounting.
- Wide temperature range ( $-25$  to  $+85^\circ\text{C}$ ), Low ESR.
- Unlike batteries, safe and high reliability without containing active and hazardous substance.
- Unlike batteries, excellent charge and discharge characteristics with no chemical reactions.
- Responds to temperature  $260^\circ\text{C}$  during the reflow peek.
- Ideal for industrial, smart meter, backing up of RTC's for surveillance camera, momentary power assistance of a battery, automotive etc.

Convert to chip




Specifications

Item	Performance				
Category temperature range (°C)	- 25 to +85				
Tolerance at rated capacitance (%)	- 20 to +80				
Internal resistance at 1 kHz	Rated capacitance (F)	0.047	0.1	0.22	0.33
	Internal resistance ( $\Omega$ Max.)	30	30	30	30
Characteristics at high and low temperature	Percentage of capacitance change	Within $\pm 30\%$ of the value at $20^\circ\text{C}$			
	Internal resistance	Five times or less of the value at $20^\circ\text{C}$			
Endurance ( $85^\circ\text{C}$ )	Test time	2000 hours			
	Percentage of capacitance change	Within $\pm 30\%$ of the initial measured value			
	Internal resistance	Four times or less of the initial specified value.			
Shelf life ( $85^\circ\text{C}$ )	Test time : 1000 hours ; Same as endurance.				
Applicable standards	Conforms to JIS C5160 - 1 (IEC 62391 - 1)				


Outline Drawing

Unit : mm

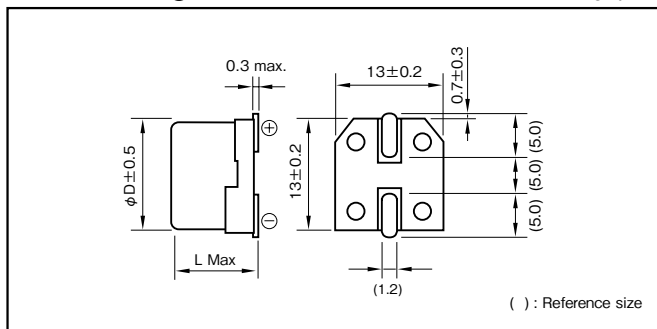

Recommended land pattern size

Unit : mm

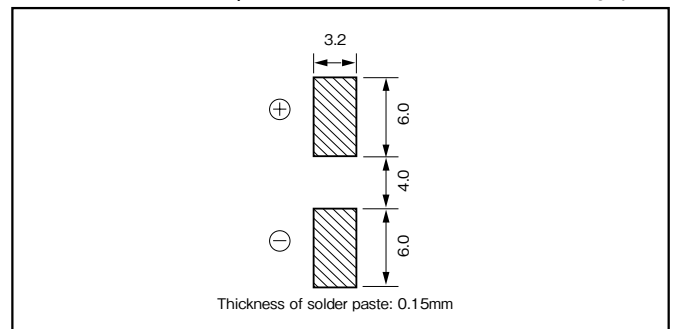

Product code system : 3.6V0.22F (\*For general product)

RS*	CVS	224	3R6	G08	012	T
Category code	Series code	capacitance code	Voltage code	Size code	Taping and packing code	Additional code

Product code is refer to following table and "Product Code System" pages.

Standard Ratings

Max. operating voltage (V)	Rated capacitance (F)	ELNA Parts No.	$\phi D \times L$ (mm)
3.6	0.047	RSCVS4733R6G08012T	12.5 × 8.5
3.6	0.1	RSCVS1043R6G08012T	12.5 × 8.5
3.6	0.22	RSCVS2243R6G08012T	12.5 × 8.5
3.6	0.33	RSCVS3343R6G08012T	12.5 × 8.5

- \*soldering conditions are described on Individual page.
- \*It can discharge with 1.5 times as much current (mA) as rated capacitance.

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

### 5.5V Standard Capacitors

GREEN CAP

70°C

- Small-sized, large capacity, excellent voltage holding.
- For all ratings, uniform 5mm pitch of terminal spacing.
- Wider temperature range (−25 to +70°C) than battery.
- $\phi 21.5 \times 8.0$ mm size can encase up to 1.5F.
- Ideal for backing up of CMOS's, IC's of camera, microcomputers, RAM's, RTC's and the like used in audio, general electronic device, and others.

CB1




Marking color : White print on an indigo sleeve

### Specifications

Item	Performance									
Category temperature range (°C)	−25 to +70									
Tolerance at rated capacitance (%)	−20 to +80									
Internal resistance at 1 kHz	Rated capacitance (F)	0.047	0.1	0.22	0.33	0.47	0.47	1	1.5	
	Internal resistance ( $\Omega$ Max.)	120	75	75	75	75 ( $\phi$ 13.5)	30 ( $\phi$ 21.5)	30	30	
Characteristics at high and low temperature	Percentage of capacitance change	Within $\pm 30\%$ of the value at 20°C								
	Internal resistance	Five times or less of the value at 20°C								
Endurance (70°C)	Test time	1000 hours								
	Percentage of capacitance change	Within $\pm 30\%$ of the initial measured value								
	Internal resistance	Four times or less of the initial specified value								
Shelf life (70°C)	Test time : 1000 hours ; Same as endurance.									
Applicable standards	Conforms to JIS C5160 - 1 (IEC 62391 - 1)									

### Outline Drawing

Unit : mm

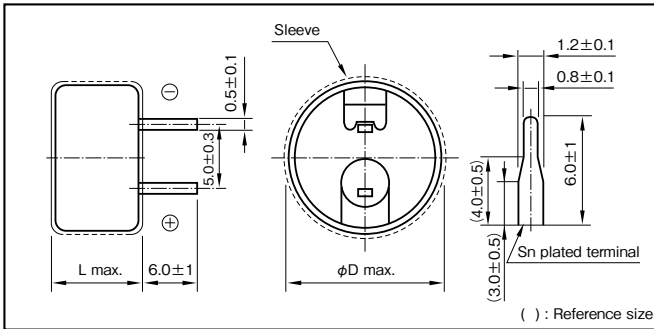

Product code system : 5.5V0.22F (\*For general product)

RS*	CB1	224	5R5	G07		T
Category code	Series code	capacitance code	Voltage code	Size code	Lead-forming and packing code	Additional code

Product code is refer to following table and "Product Code System" pages.

### Standard Ratings

Max. operating voltage (V)	Rated capacitance (F)	ELNA Parts No.	$\phi D \times L$ (mm)
5.5	0.047	RSCB14735R5G07□□□T	13.5×7.5
5.5	0.1	RSCB11045R5G07□□□T	13.5×7.5
5.5	0.22	RSCB12245R5G07□□□T	13.5×7.5
5.5	0.33	RSCB13345R5G07□□□T	13.5×7.5
5.5	0.47	RSCB14745R5G07□□□ST	13.5×7.5
5.5	0.47	RSCB14745R5L08□□□T	21.5×8.0
5.5	1	RSCB11055R5L08□□□T	21.5×8.0
5.5	1.5	RSCB11555R5L08□□□T	21.5×8.0


**5.5V Low Resistance**

GREEN CAP

70°C

Low ESR

- Internal resistance was reduced to about 1/3 ( $\phi 13.5$ ), compared with CB1 series.
- It excels in rapid charge.




Marking color : White print on an indigo sleeve

Specifications

Item	Performance								
Category temperature range (°C)	-25 to +70								
Tolerance at rated capacitance (%)	-20 to +80								
Internal resistance at 1 kHz	Rated capacitance (F)	0.047	0.1	0.22	0.33	0.47	0.47	1	1.5
	Internal resistance ( $\Omega$ Max.)	25	25	25	25	25 ( $\phi 13.5$ )	20 ( $\phi 21.5$ )	20	20
Characteristics at high and low temperature	Percentage of capacitance change	Within $\pm 30\%$ of the value at 20°C							
	Internal resistance	Five times or less of the value at 20°C							
Endurance (70°C)	Test time	1000 hours							
	Percentage of capacitance change	Within $\pm 30\%$ of the initial measured value							
	Internal resistance	Four times or less of the initial specified value							
Shelf life (70°C)	Test time : 1000 hours ; Same as endurance.								
Applicable standards	Conforms to JIS C5160 - 1 (IEC 62391 - 1)								

Outline Drawing

Unit : mm

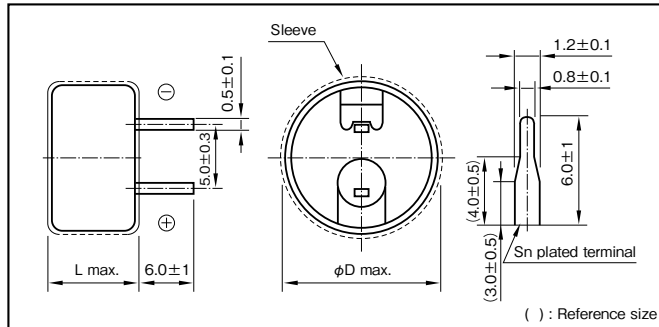

Product code system : 5.5V0.22F (\*For general product)

RS*	CBN	224	5R5	G07		T
Category code	Series code	capacitance code	Voltage code	Size code	Lead-forming and packing code	Additional code

Product code is refer to following table and "Product Code System" pages.

Standard Ratings

Max. operating voltage (V)	Rated capacitance (F)	ELNA Parts No.	$\phi D \times L$ (mm)
5.5	0.047	RSCBN4735R5G07□□□□T	13.5×7.5
5.5	0.1	RSCBN1045R5G07□□□□T	13.5×7.5
5.5	0.22	RSCBN2245R5G07□□□□T	13.5×7.5
5.5	0.33	RSCBN3345R5G07□□□□T	13.5×7.5
5.5	0.47	RSCBN4745R5G07□□□□ST	13.5×7.5
5.5	0.47	RSCBN4745R5L08□□□□T	21.5×8.0
5.5	1	RSCBN1055R5L08□□□□T	21.5×8.0
5.5	1.5	RSCBN1555R5L08□□□□T	21.5×8.0

\*It can discharge with 1.5 times as much current (mA) as rated capacitance.


**5.5V Low Profile and High Temperature Capacitors**

GREEN CAP 85°C



Marking color : White print on a black sleeve

- High temperature type of series CB1.
- Small-sized, large capacity, excellent voltage holding.
- For all ratings, uniform 5mm pitch of terminal spacing.
- $\phi 13.5 \times 7.5$ mm size can encase up to 0.33F.
- Ideal for backing up of CMOS's, IC's of camera, microcomputers, RAM's, RTC's and the like used in audio, general electronic device, and others.




**Specifications**

Item	Performance	
Category temperature range (°C)	-10 to +85	
Tolerance at rated capacitance (%)	-20 to +80	
Internal resistance at 1 kHz	Rated capacitance (F)	0.047    0.1    0.22    0.33    0.47    1
	Internal resistance ( $\Omega$ Max.)	200    150    150    150    100    75
Characteristics at high and low temperature	Percentage of capacitance change	Within $\pm 30\%$ of the value at 20°C
	Internal resistance	Four times or less of the initial specified value.
Endurance (85°C)	Test time	1000 hours
	Percentage of capacitance change	Within $\pm 30\%$ of the initial measured value
	Internal resistance	Four times or less of the initial specified value
Shelf life (85°C)	Test time : 1000 hours ; Same as endurance.	
Applicable standards	Conforms to JIS C5160 - 1 (IEC 62391 - 1)	

**Outline Drawing**

Unit : mm

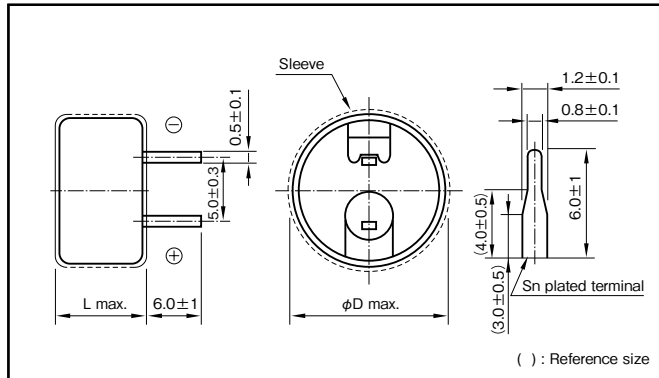

Product code system : 5.5V0.22F (\*For general product)

RS*	CBJ	224	5R5	G07		T
Category code	Series code	capacitance code	Voltage code	Size code	Lead-forming and packing code	Additional code

Product code is refer to following table and "Product Code System" pages.

**Standard Ratings**

Max. operating voltage (V)	Rated capacitance (F)	ELNA Parts No.	$\phi D \times L$ (mm)
5.5	0.047	RSCBJ4735R5G07□□□T	13.5×7.5
5.5	0.1	RSCBJ1045R5G07□□□T	13.5×7.5
5.5	0.22	RSCBJ2245R5G07□□□T	13.5×7.5
5.5	0.33	RSCBJ3345R5G07□□□T	13.5×7.5
5.5	0.47	RSCBJ4745R5L08□□□T	21.5×8.0
5.5	1	RSCBJ1055R5L08□□□T	21.5×8.0


NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

**3.6V Low Profile and Low ESR High Temperature Capacitors**

GREEN CAP

85°C

- Long life of 3.6V 2000 hours in small size low ESR.
- For all ratings, uniform 5mm pitch of terminal spacing.
- Wider temperature range (-25 to +85°C) than battery.
- $\phi 13.5 \times 7.5$ mm size can encase up to 0.47F.
- Ideal for backing up of CMOS's, IC's of camera, microcomputers, RAM's, RTC's and the like used in audio, smart meter, general electronic device, and others.
- It excels in rapid charge.




Marking color : White print on a black sleeve

Specifications

Item	Performance							
Category temperature range (°C)	-25 to +85							
Tolerance at rated capacitance (%)	-20 to +80							
Internal resistance at 1 kHz	Rated capacitance (F)	0.047	0.1	0.22	0.33	0.47	0.47	1
	Internal resistance ( $\Omega$ Max.)	25	25	25	25	25 ( $\phi 13.5$ )	20 ( $\phi 21.5$ )	20
Characteristics at high and low temperature	Percentage of capacitance change	Within $\pm 30\%$ of the value at 20°C						
	Internal resistance	Five times or less of the value at 20°C						
Endurance (85°C)	Test time	2000 hours ( $\phi 13.5$ 0.47F : 1000 hours)						
	Percentage of capacitance change	Within $\pm 30\%$ of the initial measured value						
	Internal resistance	Four times or less of the initial specified value						
Shelf life (85°C)	Test time : 1000 hours ; Same as endurance.							
Applicable standards	Conforms to JIS C5160 - 1 (IEC 62391 - 1)							

Outline Drawing

Unit : mm

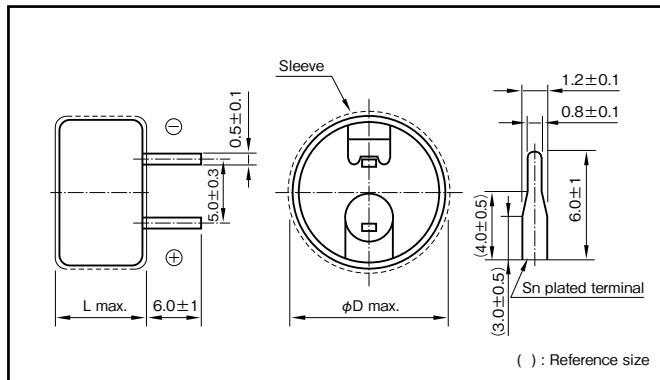

Product code system : 3.6V0.22F (\*For general product)

RS*	CBS	224	3R6	G07		T
Category code	Series code	capacitance code	Voltage code	Size code	Lead-forming and packing code	Additional code

Product code is refer to following table and "Product Code System" pages.

Standard Ratings

Max. operating voltage (V)	Rated capacitance (F)	ELNA Parts No.	$\phi D \times L$ (mm)
3.6	0.047	RSCBS4733R6G07□□□T	13.5×7.5
3.6	0.1	RSCBS1043R6G07□□□T	13.5×7.5
3.6	0.22	RSCBS2243R6G07□□□T	13.5×7.5
3.6	0.33	RSCBS3343R6G07□□□T	13.5×7.5
3.6	0.47	RSCBS4743R6G07□□□ST	13.5×7.5
3.6	0.47	RSCBS4743R6L08□□□T	21.5×8.0
3.6	1	RSCBS1053R6L08□□□T	21.5×8.0

\*It can discharge with 1.5 times as much current (mA) as rated capacitance.



NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

## 5.5V Miniaturized Standard Capacitors

GREEN CAP

70°C

- Smaller and lighter than Series CB1.
- 5mm tall. Max. thin profile.
- Miniaturized but can encase up to 0.47F in  $\phi 11.5$  case, and 1.5F in  $\phi 19.0$  case.
- Ideal for backing up of CMOS's, IC's of camera, microcomputers, RAM's, RTC's and the like used in audio, general electronic device, and others.

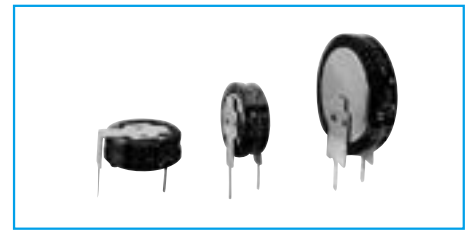


Marking color : White print on an indigo sleeve

### Specifications

Item	Performance
Category temperature range (°C)	-25 to +70
Tolerance at rated capacitance (%)	-20 to +80
Internal resistance at 1 kHz	Rated capacitance (F)
	Internal resistance ( $\Omega$ Max.)
Characteristics at high and low temperature	Percentage of capacitance change
	Internal resistance
Endurance (70°C)	Test time
	Percentage of capacitance change
	Internal resistance
Shelf life (70°C)	Test time : 1000 hours ; Same as endurance.
Applicable standards	Conforms to JIS C5160 - 1 (IEC 62391 - 1)

### Outline Drawing

Unit : mm

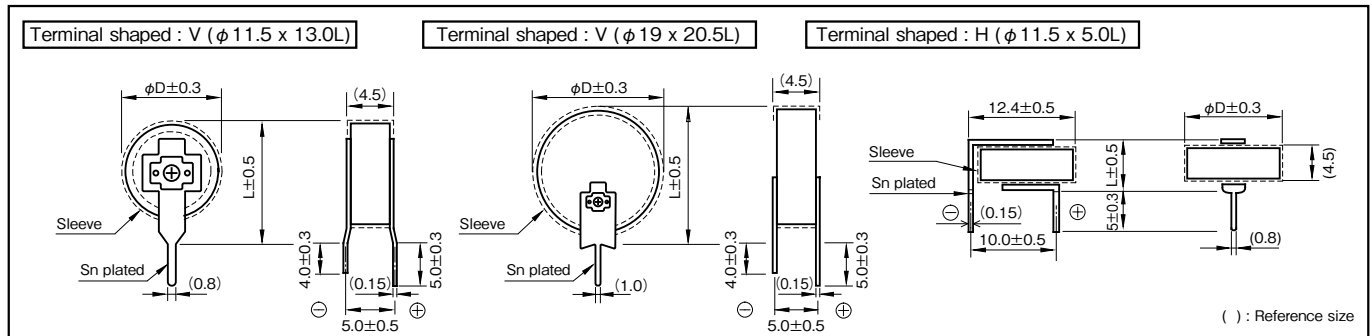

### Product code system : 5.5V0.22F (\*For general product)

RS*	CX1	224	5R5			U
Category code	Series code	capacitance code	Voltage code	Size code	Lead-forming and packing code	Additional code

Product code is refer to following table and "Product Code System" pages.

### Note

Do not apply external force to products or terminals as stress such as twisting, bending, pushing, or falling of such products or terminals may remove the terminals, resulting in an open/short circuit or liquid leakage. Avoid applying excessive heat to capacitors during heating of an adhesive curing oven. For details, refer to the precautions in use of DYNACAP.

### Standard Ratings

Max. operating voltage (V)	Rated capacitance (F)	ELNA Parts No.	$\phi D \times L$ (mm)
5.5	0.047	RSCX14735R5F13□□□□U	11.5×13.0
		RSCX14735R5F05□□□□U	11.5× 5.0
5.5	0.1	RSCX11045R5F13□□□□U	11.5×13.0
		RSCX11045R5F05□□□□U	11.5× 5.0
5.5	0.22	RSCX12245R5F13□□□□U	11.5×13.0
		RSCX12245R5F05□□□□U	11.5× 5.0
5.5	0.33	RSCX13345R5F13□□□□U	11.5×13.0
		RSCX13345R5F05□□□□U	11.5× 5.0
5.5	0.47	RSCX14745R5F13□□□□SU	11.5×13.0
		RSCX14745R5F05□□□□SU	11.5× 5.0
		RSCX14745R5K20□□□□U	19.0×20.5
5.5	1	RSCX11055R5K20□□□□U	19.0×20.5
5.5	1.5	RSCX11555R5K20□□□□U	19.0×20.5



NOTE : Design, Specifications are subject to change without notice. It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

**5.5V Miniaturized Low Resistance Capacitors**

GREEN CAP

70°C

- Internal resistance was reduced to about 1/3 ( $\phi 11.5$ ), compared with CX1 series.
- 5mm tall. Max. thin profile.
- Miniaturized but can encase up to 0.47F in  $\phi 11.5$  case, and 1.5F in  $\phi 19.0$  case.
- It excels in rapid charge.
- Ideal for backing up of CMOS's, IC's of camera, microcomputers, RAM's, RTC's and the like used in audio, general electronic device, and others.

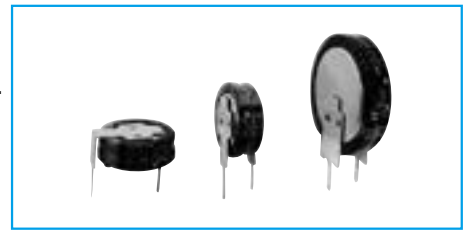


Marking color : White print on an indigo sleeve

Specifications

Item	Performance	
Category temperature range (°C)	-25 to +70	
Tolerance at rated capacitance (%)	-20 to +80	
Internal resistance at 1 kHz	Rated capacitance (F)	0.047   0.1   0.22   0.33   0.47   0.47   1   1.5
	Internal resistance ( $\Omega$ Max.)	25   25   25   25   25 ( $\phi 11.5$ )   20 ( $\phi 19.0$ )   20   20
Characteristics at high and low temperature	Percentage of capacitance change	Within $\pm 30\%$ of the value at 20°C
	Internal resistance	Five times or less of the value at 20°C
Endurance (70°C)	Test time	1000 hours
	Percentage of capacitance change	Within $\pm 30\%$ of the initial measured value
	Internal resistance	Four times or less of the initial specified value
Shelf life (70°C)	Test time : 1000 hours ; Same as endurance.	
Applicable standards	Conforms to JIS C5160 - 1 (IEC 62391 - 1)	

Outline Drawing

Unit : mm

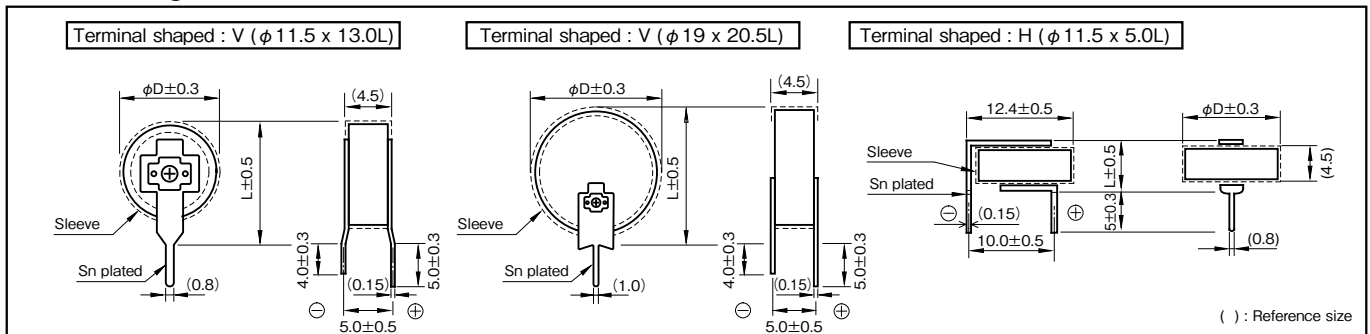

Product code system : 5.5V0.22F (\*For general product)

RS*	CXN	224	5R5			U
Category code	Series code	capacitance code	Voltage code	Size code	Lead-forming and packing code	Additional code

Product code is refer to following table and "Product Code System" pages.

Note

Do not apply external force to products or terminals as stress such as twisting, bending, pushing, or falling of such products or terminals may remove the terminals, resulting in an open/short circuit or liquid leakage.  
Avoid applying excessive heat to capacitors during heating of an adhesive curing oven. For details, refer to the precautions in use of DYNACAP.

Standard Ratings

Max. operating voltage (V)	Rated capacitance (F)	ELNA Parts No.	$\phi D \times L$ (mm)
5.5	0.047	RSCXN4735R5F13□□□U	11.5×13.0
		RSCXN4735R5F05□□□U	11.5× 5.0
5.5	0.1	RSCXN1045R5F13□□□U	11.5×13.0
		RSCXN1045R5F05□□□U	11.5× 5.0
5.5	0.22	RSCXN2245R5F13□□□U	11.5×13.0
		RSCXN2245R5F05□□□U	11.5× 5.0
5.5	0.33	RSCXN3345R5F13□□□U	11.5×13.0
		RSCXN3345R5F05□□□U	11.5× 5.0
5.5	0.47	RSCXN4745R5F13□□□SU	11.5×13.0
		RSCXN4745R5F05□□□SU	11.5× 5.0
		RSCXN4745R5K20□□□U	19.0×20.5
5.5	1	RSCXN1055R5K20□□□U	19.0×20.5
5.5	1.5	RSCXN1555R5K20□□□U	19.0×20.5


\*It can discharge with 1.5 times as much current (mA) as rated capacitance.

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

**5.5V Miniaturized High Temperature Capacitors**


GREEN CAP

85°C

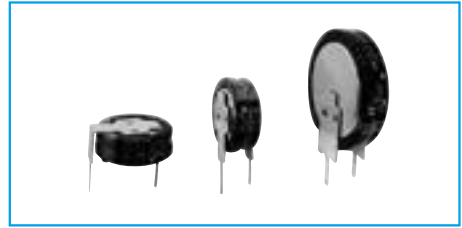

Marking color : White print on a black sleeve

- High temperature type of Series CX1.
- 5mm tall. Max. thin profile.
- Miniaturized but can encase up to 0.33F in  $\phi 11.5$  case, and 1.0F in  $\phi 19.0$  case.
- Ideal for backing up of CMOS's, IC's of camera, microcomputers, RAM's, RTC's and the like used in audio, general electronic device, and others.




Specifications

Item	Performance
Category temperature range (°C)	-10 to +85
Tolerance at rated capacitance (%)	-20 to +80
Internal resistance at 1 kHz	Rated capacitance (F)
	Internal resistance ( $\Omega$ Max.)
Characteristics at high and low temperature	Percentage of capacitance change
	Internal resistance
Endurance (85°C)	Test time
	Percentage of capacitance change
	Internal resistance
Shelf life (85°C)	Test time : 1000 hours ; Same as endurance.
Applicable standards	Conforms to JIS C5160 - 1 (IEC 62391 - 1)

Outline Drawing

Unit : mm

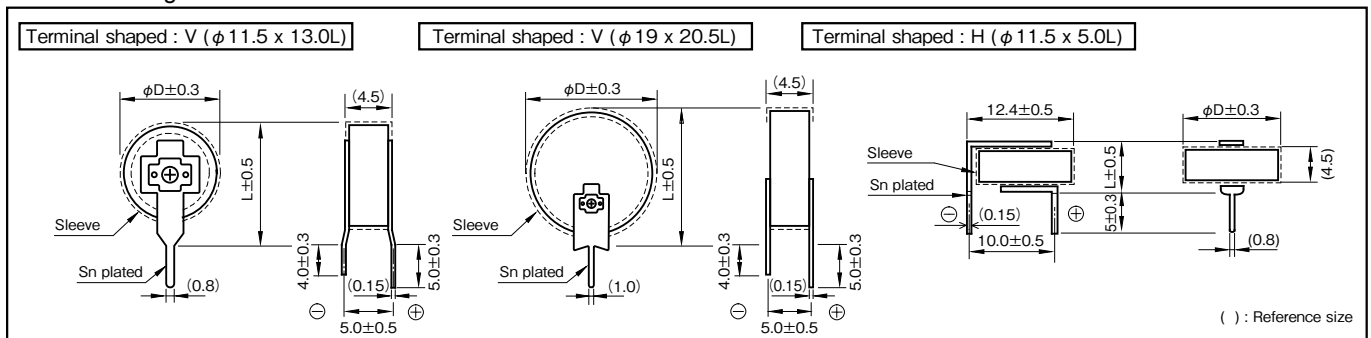

Product code system : 5.5V0.22F (\*For general product)

RS*	CXJ	224	5R5			U
Category code	Series code	capacitance code	Voltage code	Size code	Lead-forming and packing code	Additional code

Product code is refer to following table and "Product Code System" pages.

Note

Do not apply external force to products or terminals as stress such as twisting, bending, pushing, or falling of such products or terminals may remove the terminals, resulting in an open/short circuit or liquid leakage.  
Avoid applying excessive heat to capacitors during heating of an adhesive curing oven.  
For details, refer to the precautions in use of DYNACAP.

Standard Ratings

Max. operating voltage (V)	Rated capacitance (F)	ELNA Parts No.	$\phi D \times L$ (mm)
5.5	0.047	RSCXJ4735R5F13□□□□U	11.5×13.0
		RSCXJ4735R5F05□□□□U	11.5× 5.0
5.5	0.1	RSCXJ1045R5F13□□□□U	11.5×13.0
		RSCXJ1045R5F05□□□□U	11.5× 5.0
5.5	0.22	RSCXJ2245R5F13□□□□U	11.5×13.0
		RSCXJ2245R5F05□□□□U	11.5× 5.0
5.5	0.33	RSCXJ3345R5F13□□□□U	11.5×13.0
		RSCXJ3345R5F05□□□□U	11.5× 5.0
5.5	1	RSCXJ1055R5K20□□□□U	19.0×20.5

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.





**3.6V Miniaturized Low ESR High Temperature Capacitors**

GREEN CAP

85°C

- Long life of 3.6V 2000 hours, low ESR in CX1 series and this size.
- 5mm tall. Max. thin profile.
- Wider temperature range (−25 to +85°C) than battery.
- Miniaturized but can encase up to 0.47F in  $\phi 11.5$  case, and 1.0F in  $\phi 19.0$  case.
- It excels in rapid charge.
- Ideal for backing up of CMOS's, IC's of camera, microcomputers, RAM's, RTC's and the like used in audio, general electronic device, and others.

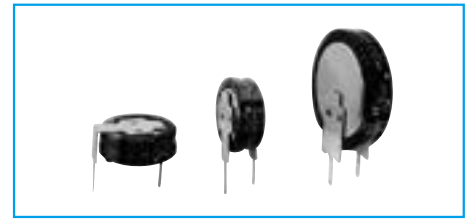


Marking color : White print on a black sleeve

Specifications

Item	Performance	
Category temperature range (°C)	−25 to +85	
Tolerance at rated capacitance (%)	−20 to +80	
Internal resistance at 1 kHz	Rated capacitance (F)	0.047   0.1   0.22   0.33   0.47   0.47   1
	Internal resistance (Ω Max.)	25   25   25   25   25 ( $\phi 11.5$ )   20 ( $\phi 19.0$ )   20
Characteristics at high and low temperature	Percentage of capacitance change	Within $\pm 30\%$ of the value at 20°C
	Internal resistance	Five times or less of the value at 20°C
Endurance (85°C)	Test time	2000 hours ( $\phi 11.5$ 0.47F : 1000 hours)
	Percentage of capacitance change	Within $\pm 30\%$ of the initial measured value
	Internal resistance	Four times or less of the initial specified value
Shelf life (85°C)	Test time : 1000 hours ; Same as endurance.	
Applicable standards	Conforms to JIS C5160 - 1 (IEC 62391 - 1)	

Outline Drawing

Unit : mm

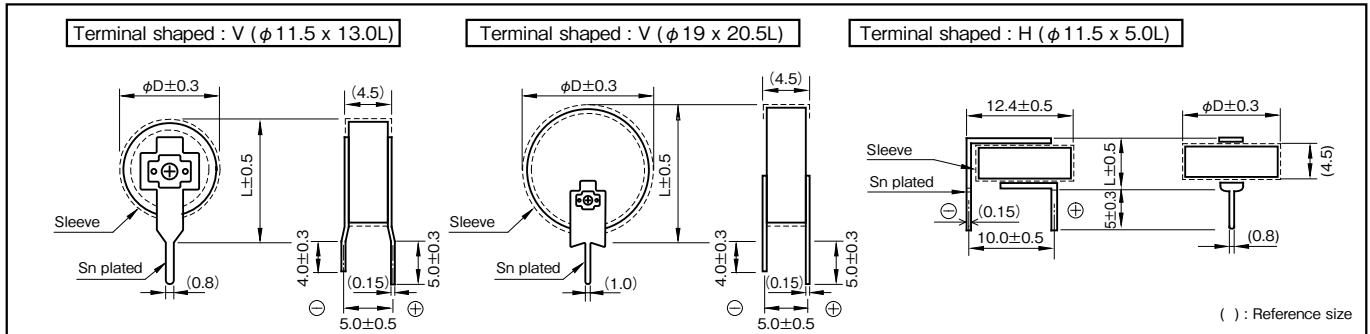

Product code system : 3.6V0.22F (\*For general product)

RS*	CXS	224	3R6	$\square$	$\square$	U
Category code	Series code	capacitance code	Voltage code	Size code	Lead-forming and packing code	Additional code

Product code is refer to following table and "Product Code System" pages.

Note

Do not apply external force to products or terminals as stress such as twisting, bending, pushing, or falling of such products or terminals may remove the terminals, resulting in an open/short circuit or liquid leakage. Avoid applying excessive heat to capacitors during heating of an adhesive curing oven. For details, refer to the precautions in use of DYNACAP.

Standard Ratings

Max. operating voltage (V)	Rated capacitance (F)	ELNA Parts No.	$\phi D \times L$ (mm)
3.6	0.047	RSCXS4733R6F13□□□□U	11.5×13.0
		RSCXS4733R6F05□□□□U	11.5× 5.0
3.6	0.1	RSCXS1043R6F13□□□□U	11.5×13.0
		RSCXS1043R6F05□□□□U	11.5× 5.0
3.6	0.22	RSCXS2243R6F13□□□□U	11.5×13.0
		RSCXS2243R6F05□□□□U	11.5× 5.0
3.6	0.33	RSCXS3343R6F13□□□□U	11.5×13.0
		RSCXS3343R6F05□□□□U	11.5× 5.0
3.6	0.47	RSCXS4743R6F13□□□□SU	11.5×13.0
		RSCXS4743R6F05□□□□SU	11.5× 5.0
		RSCXS4743R6K20□□□□U	19.0×20.5
3.6	1	RSCXS1053R6K20□□□□U	19.0×20.5

\*It can discharge with 1.5 times as much current (mA) as rated capacitance.

NOTE : Design, Specifications are subject to change without notice. It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

### High Temperature Capacitors

GREEN CAP

85°C

- High temperature tolerant (−25 to +85°C) and highly reliable.
- Ideal for backing up of CMOS IC's, microcomputers, RAM's, RTC's for smart meter, outdoor equipment, industrial.



Marking color : White print on an indigo sleeve

CH1

Miniaturized

High temperature

CX1




CB1

### Specifications

Item	Performance	
Category temperature range (°C)	−25 to +85	
Tolerance at rated capacitance (%)	−20 to +80	
Internal resistance at 1 kHz	Rated capacitance (F)	0.047    0.1    0.22    0.47    0.68    1
	Internal resistance (Ω Max.)	300    200    120    50    50    30
Characteristics at high and low temperature	Percentage of capacitance change	Within ±30% of the value at 20°C
	Internal resistance	Five times or less of the value at 20°C
Endurance (85°C)	Test time	1000 hours
	Percentage of capacitance change	Within ±30% of the initial measured value
	Internal resistance	Four times or less of the initial specified value
Shelf life (85°C)	Test time : 1000 hours ; Same as endurance.	
Applicable standards	Conforms to JIS C5160 - 1 (IEC 62391 - 1)	

### Outline Drawing

Unit : mm

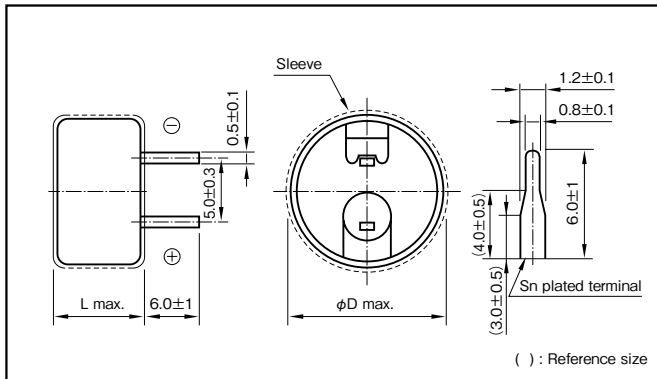

Product code system : 5.5V0.22F (\*For general product)

RS*	CH1	224	5R5	G09		T
Category code	Series code	capacitance code	Voltage code	Size code	Lead-forming and packing code	Additional code

Product code is refer to following table and "Product Code System" pages.


### Standard Ratings

Max. operating voltage (V)	Rated capacitance (F)	ELNA Parts No.	φD×L (mm)
5.5	0.047	RSCH14735R5G09□□□T	13.5×9.5
5.5	0.1	RSCH11045R5G09□□□T	13.5×9.5
5.5	0.22	RSCH12245R5G09□□□T	13.5×9.5
5.5	0.47	RSCH14745R5L09□□□T	21.5×9.5
5.5	0.68	RSCH16845R5L09□□□T	21.5×9.5
5.5	1	RSCH11055R5L09□□□T	21.5×9.5

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

**5.5V Wide Temperature Range Capacitors**

GREEN CAP 85°C

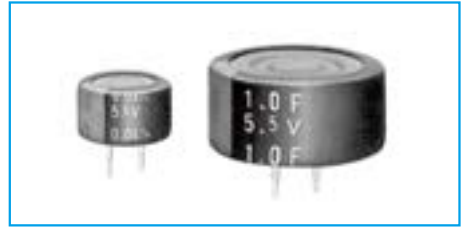

Marking color : White print on an indigo sleeve

- It is a category temperature range larger than battery.
- $\phi 13.5$  size can encase up to 0.22F,  $\phi 21.5$  size can encase up to 1.0F.
- It excels in rapid charge.
- Ideal for backing up of CMOS IC's, microcomputers, RAM's, RTC's for smart meter, outdoor equipment, auto motive and industrial.

Wide temperature range




Specifications

Item	Performance						
Category temperature range (°C)	-40 to +85						
Tolerance at rated capacitance (%)	-20 to +80						
Internal resistance at 1 kHz	Rated capacitance (F)	0.047	0.1	0.22	0.47	0.68	1
	Internal resistance ( $\Omega$ Max.)	40	40	40	20	20	20
Characteristics at high and low temperature	Percentage of capacitance change	Within $\pm 30\%$ of the value at 20°C					
	Internal resistance	-40°C : Seven times or less of the value at 20°C 85°C : Five times or less of the value at 20°C					
Endurance (85°C)	Test time	1000 hours					
	Percentage of capacitance change	Within $\pm 30\%$ of the initial measured value					
	Internal resistance	Four times or less of the initial specified value					
Shelf life (85°C)	Test time : 1000 hours ; Same as endurance.						
Applicable standards	Conforms to JIS C5160 - 1 (IEC 62391 - 1)						

Outline Drawing

Unit : mm

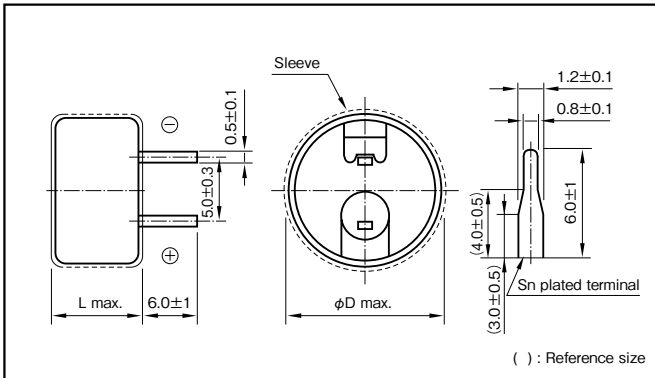

Product code system : 5.5V0.22F (\*For general product)

RS*	CHL	224	5R5	G09		T
Category code	Series code	capacitance code	Voltage code	Size code	Lead-forming and packing code	Additional code

Product code is refer to following table and "Product Code System" pages.

Standard Ratings


Max. operating voltage (V)	Rated capacitance (F)	ELNA Parts No.	$\phi D \times L$ (mm)
5.5	0.047	RSCHL4735R5G09□□□T	13.5×9.5
5.5	0.1	RSCHL1045R5G09□□□T	13.5×9.5
5.5	0.22	RSCHL2245R5G09□□□T	13.5×9.5
5.5	0.47	RSCHL4745R5L09□□□T	21.5×9.5
5.5	0.68	RSCHL6845R5L09□□□T	21.5×9.5
5.5	1	RSCHL1055R5L09□□□T	21.5×9.5

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

**5.5V High Temperature, Long Life Capacitors**

GREEN CAP

85°C

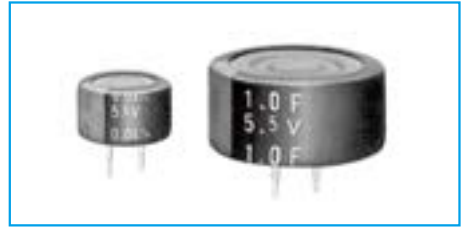

Marking color : White print on a Black sleeve

- Guarantees 3000 hours at 85°C, 5.5V (10 years at room temperature).
- It is a category temperature range larger than battery.
- It excels in rapid charge.
- Ideal for backing up of CMOS IC's, microcomputers, RAM's, RTC's for smart meter, outdoor equipment, auto motive and industrial.

Long Life




Specifications

Item	Performance	
Category temperature range (°C)	-25 to +85	
Tolerance at rated capacitance (%)	-20 to +80	
Internal resistance at 1 kHz	Rated capacitance (F)	0.047    0.1    0.22    0.47    0.68    1
	Internal resistance (Ω Max.)	300    200    120    50    50    30
Characteristics at high and low temperature	Percentage of capacitance change	Within ±30% of the value at 20°C
	Internal resistance	Five times or less of the value at 20°C
Endurance (85°C)	Test time	3000 hours
	Percentage of capacitance change	Within ±30% of the initial measured value
	Internal resistance	Four times or less of the initial specified value
Shelf life (85°C)	Test time : 1000 hours ; Same as endurance.	
Applicable standards	Conforms to JIS C5160 - 1 (IEC 62391 - 1)	

Outline Drawing

Unit : mm

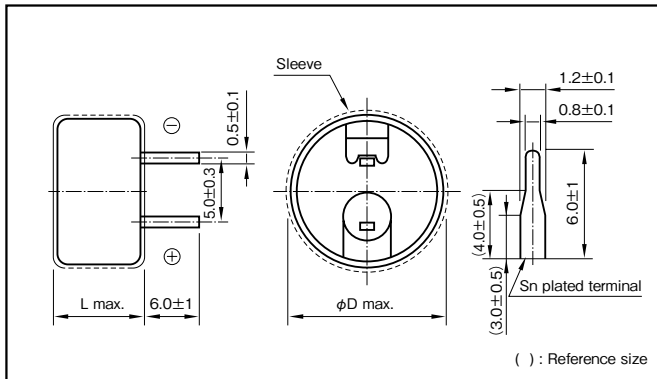

Product code system : 5.5V0.22F (\*For general product)

RS*	CHC	224	5R5	G09		T
Category code	Series code	capacitance code	Voltage code	Size code	Lead-forming and packing code	Additional code

Product code is refer to following table and "Product Code System" pages.

Standard Ratings

Max. operating voltage (V)	Rated capacitance (F)	ELNA Parts No.	φD×L (mm)
5.5	0.047	RSCHC4735R5G09□□□T	13.5×9.5
5.5	0.1	RSCHC1045R5G09□□□T	13.5×9.5
5.5	0.22	RSCHC2245R5G09□□□T	13.5×9.5
5.5	0.47	RSCHC4745R5L09□□□T	21.5×9.5
5.5	0.68	RSCHC6845R5L09□□□T	21.5×9.5
5.5	1	RSCHC1055R5L09□□□T	21.5×9.5

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

# CS1,CSK-614,621

ELECTRIC DOUBLE LAYER CAPACITORS "DYNACAP"

Return to Type List

**ELNA**


## Coin Cell Capacitors

GREEN CAP

SMD

60°C / 70°C


- Reflow soldering method available.
- High reliability, Safe and unlike secondary batteries, environmentally friendly devices.
- Unlike batteries, excellent charge and discharge characteristics with no chemical reactions.
- 1.8mm height type 614 made lineup in the CS1, CSK series.
- Ideal for backing up of portable device etc.

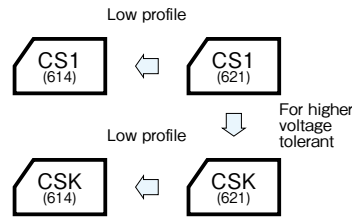


## Specifications

Item	Performance					
Series Name	Series CS1			Series CSK		
Max.operating voltage (V)	2.5			3.3		
Category temperature range (°C)	-25 to +70			-10 to +60		
Tolerance at rated capacitance (%)	-20 to +80			-20 to +80		
Internal resistance (Ω) at 1 kHz	Size code	614 (D01)	621 (D02)	Size code	614 (D01)	621 (D02)
	Rated capacitance (F)	0.2	0.33	Rated capacitance (F)	0.2	0.33
	Internal resistance (Ω Max.)	100	100	Internal resistance (Ω Max.)	200	200
Characteristics at high and low temperature	Size code	614 (D01)	621 (D02)	Size code	614 (D01)	621 (D02)
	Percentage of capacitance change	Within ±30% of the value at 20°C	Within ±30% of the value at 20°C	Percentage of capacitance change	Within ±50% of the value at 20°C	Within ±50% of the value at 20°C
	Internal resistance	Five times or less of the value at 20°C	Five times or less of the value at 20°C	Internal resistance	Five times or less of the initial specified value	Five times or less of the value at 20°C
Endurance	Size code	614 (D01)	621 (D02)	Size code	614 (D01)	621 (D02)
	Test time and temp.	70°C 1000 hours	70°C 500 hours	Test time and temp.	60°C 1000 hours	60°C 500 hours
	Percentage of capacitance change	Within ±30% of the initial measured value	Within ±30% of the initial measured value	Percentage of capacitance change	Within ±30% of the initial measured value	Within ±30% of the initial measured value
Internal resistance	1kΩ Max.	400Ω Max.	Internal resistance	2kΩ Max.	800Ω Max.	
Shelf life	Same as endurance.			Same as endurance.		
Applicable standards	Conforms to JIS C5160 - 1 (IEC 62391 - 1)					

## Outline Drawing

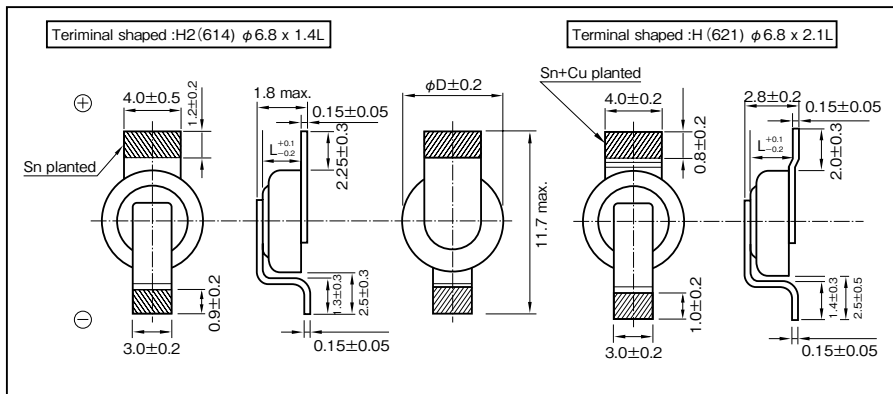

## Recommended land pattern size

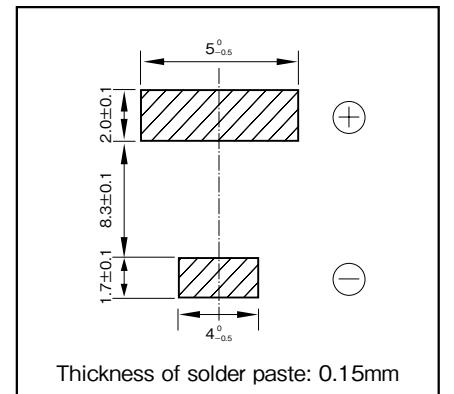

※Please consult with us about other terminal form.

Product code system (example : 614, 2.5V0.2F, terminal shaped : H2)						
RS*	CS1	204	2R5	D01	004	T
Category code	Series code	capacitance code	Voltage code	Size code	Taping and packing code	Additional code

Product code system (example : 621, 3.3V0.33F, terminal shaped : H)						
RS*	CSK	334	3R3	D02	008	U
Category code	Series code	capacitance code	Voltage code	Size code	Taping and packing code	Additional code

\*Example of for general product. Product code is refer to following table and "Product Code System" pages.

## Standard Ratings


Max. operating voltage (V)	Rated capacitance (F)	ELNA Parts No.	φD×L (mm)
2.5	0.2	RSCS12042R5D01004T	6.8×1.4
3.3	0.2	RSCSK2043R3D01004T	6.8×1.4
2.5	0.33	RSCS13342R5D02008U	6.8×2.1
3.3	0.33	RSCSK3343R3D02008U	6.8×2.1

\* Soldering conditions are described on Individual page.

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.


## Standard, Large Capacitance Type Capacitors

GREEN CAP 60°C / 70°C 2.5V / 2.7V

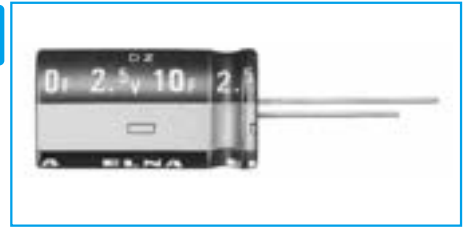

Marking color : White print on a black sleeve

- Environmentally Friendly : without environmentally hazardous substances such as Cd or Pb.
- Unlike batteries, excellent charge and discharge characteristics with no chemical reactions.




### Specifications

Item	Performance	
Series name	Series DZ1,GZ1	Series DZH,GZH
Category temperature range (°C)	-25 to +70	-25 to +60
Tolerance at rated capacitance (%)	-20 to +80	-20 to +80
Internal resistance at 1kHz	Refer to the following page	
Characteristics at high and low temperature	Percentage of capacitance change	Within ±30% of the value at 20°C
	Internal resistance	Five times or less of the value at 20°C
Endurance	Test temperature	70°C
	Test time	1000 hours
	Percentage of capacitance change	Within ±30% of the initial measured value
	Internal resistance	Four times or less of the initial specified value
Shelf life	Same as endurance	Same as endurance
Applicable standards	Conforms to JIS C5160 - 1 (IEC 62391 - 1)	

### Outline Drawing

Unit : mm

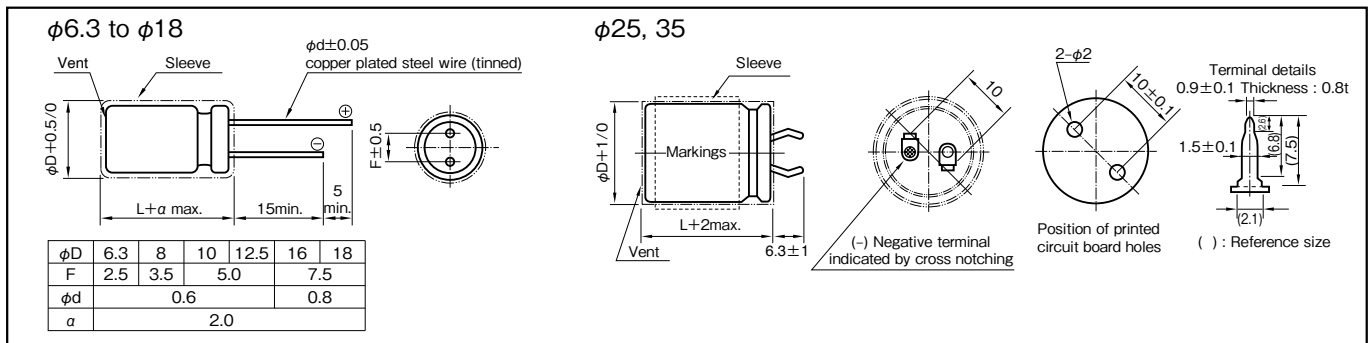

#### Product code system (\*For general product)

φ18 or less (2.5V10F)

RS*	DZ1	106	2R5	□	□	(S)T
Category code	Series code	capacitance code	Voltage code	Size code	Lead-forming and packing code	Additional code

#### Product code system (\*For general product)

φ25 or more (2.5V100F)

RS*	GZ1	107	2R5	N50	□	T
Category code	Series code	capacitance code	Voltage code	Size code	Lead-forming and packing code	Additional code

Product code is refer to next page table and "Product Code System" pages.

## Standard Ratings (Series DZ1, GZ1 2.5V)

Max. operating voltage (V)	Rated capacitance (F)	Max. Leakage Current (mA) after 24h	ELNA Parts No.	φD × L (mm)	Internal resistance (Ω max.) at 1kHz	Internal resistance (mΩ) at 1kHz (measurement value)
2.5	1	0.1	RSDZ11052R5D14 □□□ T	6.3 × 14	1.0	400
2.5	1	0.1	RSDZ11052R5E12 □□□ T	8 × 12	1.0	200
2.5	2.7	0.2	RSDZ12752R5E20 □□□ ST	8 × 20	0.5	150
2.5	3.3	0.2	RSDZ13352R5F20 □□□ T	10 × 20	0.3	90
2.5	4.7	0.3	RSDZ14752R5F20 □□□ T	10 × 20	0.2	80
2.5	5.6	0.3	RSDZ15652R5F20 □□□ T	10 × 20	0.2	70
2.5	6.8	0.4	RSDZ16852R5F25 □□□ T	10 × 25	0.2	60
2.5	10	0.5	RSDZ11062R5F35 □□□ T	10 × 35	0.2	40
2.5	10	0.5	RSDZ11062R5G25 □□□ ST	12.5 × 25	0.2	40
2.5	15	0.7	RSDZ11562R5G35 □□□ ST	12.5 × 35	0.2	35
2.5	15	0.7	RSDZ11562R5J20 □□□ T	16 × 20	0.2	35
2.5	22	0.8	RSDZ12262R5J25 □□□ T	16 × 25	0.2	30
2.5	33	0.8	RSDZ13362R5J35 □□□ T	16 × 35.5	0.2	30
2.5	40	0.8	RSDZ14062R5K40 □□□ T	18 × 40	0.2	30
2.5	50	1.0	RSGZ15062R5N40 □□□ T	25 × 40	0.08	20
2.5	100	1.0	RSGZ11072R5N50 □□□ T	25 × 50	0.08	15
2.5	200	2.0	RSGZ12072R5Q50 □□□ T	35 × 50	0.08	15

We tailor packaged product in series and parallel arrangements according to voltage and capacitance as required.

## Standard Ratings (Series DZ1, GZ1 2.7V)

Max. operating voltage (V)	Rated capacitance (F)	Max. Leakage Current (mA) after 24h	ELNA Parts No.	φD × L (mm)	Internal resistance (Ω max.) at 1kHz	Internal resistance (mΩ) at 1kHz (measurement value)
2.7	1	0.2	RSDZ11052R7D14 □□□ T	6.3 × 14	1.0	400
2.7	1	0.2	RSDZ11052R7E12 □□□ T	8 × 12	1.0	200
2.7	2.7	0.3	RSDZ12752R7E20 □□□ ST	8 × 20	0.5	150
2.7	3.3	0.3	RSDZ13352R7F20 □□□ T	10 × 20	0.3	130
2.7	4.7	0.4	RSDZ14752R7F20 □□□ T	10 × 20	0.2	80
2.7	5.6	0.4	RSDZ15652R7F20 □□□ T	10 × 20	0.2	70
2.7	6.8	0.5	RSDZ16852R7F25 □□□ T	10 × 25	0.2	60
2.7	10	0.6	RSDZ11062R7F35 □□□ T	10 × 35	0.2	40
2.7	10	0.6	RSDZ11062R7G25 □□□ ST	12.5 × 25	0.2	40
2.7	15	0.8	RSDZ11562R7G35 □□□ ST	12.5 × 35	0.2	35
2.7	15	0.8	RSDZ11562R7J25 □□□ T	16 × 25	0.2	35
2.7	22	1.0	RSDZ12262R7J31 □□□ T	16 × 31.5	0.2	30
2.7	33	1.0	RSDZ13362R7J40 □□□ T	16 × 40	0.2	30

We tailor packaged product in series and parallel arrangements according to voltage and capacitance as required.

## Standard Ratings (Series DZH, GZH 2.5V)

Max. operating voltage (V)	Rated capacitance (F)	Max. Leakage Current (mA) after 24h	ELNA Parts No.	φD × L (mm)	Internal resistance (Ω max.) at 1kHz	Internal resistance (mΩ) at 1kHz (measurement value)
2.5	22	0.8	RSDZH2262R5G35 □□□ ST	12.5 × 35	0.2	55
2.5	50	1.0	RSDZH5062R5K40 □□□ T	18 × 40	0.08	30
2.5	100	2.0	RSGZH1072R5N40 □□□ T	25 × 40	0.08	20
2.5	300	5.0	RSGZH3072R5Q50 □□□ T	35 × 50	0.08	15

We tailor packaged product in series and parallel arrangements according to voltage and capacitance as required.


## High Power Type Capacitors

GREEN CAP   70°C   Low ESR   2.5V / 2.7V



Marking color : White print on a blue sleeve

- Low internal resistance allows boosting charge and heavy-current discharge. (ampere level)
- Environmentally Friendly : without environmentally hazardous substances such as Cd or Pb.
- Unlike batteries, excellent charge and discharge characteristics with no chemical reaction.



### Specifications

Item	Performance	
Category temperature range (°C)	-25 to +70	
Tolerance at rated capacitance (%)	-20 to +80	
Internal resistance	Refer to the following page	
Characteristics at high and low temperature	Percentage of capacitance change	Within ±30% of the value at 20°C
	Internal resistance	Five times or less of the value at 20°C
Endurance (70°C)	Test time	1000 hours
	Percentage of capacitance change	Within ±30% of the initial measured value
	Internal resistance	Four times or less of the initial specified value
Shelf life (70°C)	Test time : 1000 hours ; Same as endurance.	
Applicable standards	Conforms to JIS C5160 - 1 (IEC 62391 - 1)	

### Outline Drawing

Unit : mm

φD	6.3	8	10	12.5	16	18
F	2.5	3.5	5.0	7.5		
φd	0.6		0.8			
a	2.0					

#### Product code system (\*For general product)

φ18 or less (2.5V10F)

RS*	DZN	106	2R5	□	□	(S)T
Category code	Series code	capacitance code	Voltage code	Size code	Lead-forming and packing code	Additional code

#### Product code system (\*For general product)

φ25 or more (2.5V100F)

RS*	GZN	107	2R5	N50	□	T
Category code	Series code	capacitance code	Voltage code	Size code	Lead-forming and packing code	Additional code

Product code is refer to next page table and "Product Code System" pages.

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.



## Standard Ratings (2.5V)

Max. operating voltage (V)	Rated capacitance (F)	Max. Leakage Current (mA) after 24h	ELNA Parts No.	φD × L (mm)	Internal resistance (Ω max.) at 1kHz	Internal DC resistance (mΩ Max.)
2.5	1	0.1	RSDZN1052R5D14 □□□ T	6.3 × 14	0.4	1500
2.5	1	0.1	RSDZN1052R5E12 □□□ T	8 × 12	0.3	1000
2.5	2.7	0.2	RSDZN2752R5E20 □□□ ST	8 × 20	0.3	500
2.5	3.3	0.2	RSDZN3352R5F20 □□□ T	10 × 20	0.1	400
2.5	4.7	0.3	RSDZN4752R5F20 □□□ T	10 × 20	0.1	400
2.5	5.6	0.3	RSDZN5652R5F20 □□□ T	10 × 20	0.1	350
2.5	6.8	0.4	RSDZN6852R5F25 □□□ T	10 × 25	0.1	300
2.5	10	0.5	RSDZN1062R5F35 □□□ T	10 × 35	0.1	200
2.5	10	0.5	RSDZN1062R5G25 □□□ ST	12.5 × 25	0.1	200
2.5	15	0.7	RSDZN1562R5G35 □□□ ST	12.5 × 35	0.1	150
2.5	15	0.7	RSDZN1562R5J20 □□□ T	16 × 20	0.1	150
2.5	22	0.8	RSDZN2262R5J25 □□□ T	16 × 25	0.1	120
2.5	33	0.8	RSDZN3362R5J35 □□□ T	16 × 35.5	0.1	100
2.5	40	0.8	RSDZN4062R5K40 □□□ T	18 × 40	0.1	75
2.5	50	1.0	RSGZN5062R5N40 □□□ T	25 × 40	0.03	60
2.5	100	1.0	RSGZN1072R5N50 □□□ T	25 × 50	0.03	50
2.5	200	2.0	RSGZN2072R5Q50 □□□ T	35 × 50	0.03	40

We tailor packaged product in series and parallel arrangements according to voltage and capacitance as required.

## Standard Ratings (2.7V)

Max. operating voltage (V)	Rated capacitance (F)	Max. Leakage Current (mA) after 24h	ELNA Parts No.	φD × L (mm)	Internal resistance (Ω max.) at 1kHz	Internal DC resistance (mΩ Max.)
2.7	1	0.2	RSDZN1052R7D14 □□□ T	6.3 × 14	0.4	1500
2.7	1	0.2	RSDZN1052R7E12 □□□ T	8 × 12	0.3	1000
2.7	2.7	0.3	RSDZN2752R7E20 □□□ ST	8 × 20	0.3	500
2.7	3.3	0.3	RSDZN3352R7F20 □□□ T	10 × 20	0.2	470
2.7	4.7	0.4	RSDZN4752R7F20 □□□ T	10 × 20	0.1	400
2.7	5.6	0.4	RSDZN5652R7F20 □□□ T	10 × 20	0.1	350
2.7	6.8	0.5	RSDZN6852R7F25 □□□ T	10 × 25	0.1	300
2.7	10	0.6	RSDZN1062R7F35 □□□ T	10 × 35	0.1	200
2.7	10	0.6	RSDZN1062R7G25 □□□ ST	12.5 × 25	0.1	200
2.7	15	0.8	RSDZN1562R7G35 □□□ ST	12.5 × 35	0.1	150
2.7	15	0.8	RSDZN1562R7J25 □□□ T	16 × 25	0.1	150
2.7	22	1.0	RSDZN2262R7J31 □□□ T	16 × 31.5	0.1	120
2.7	33	1.0	RSDZN3362R7J40 □□□ T	16 × 40	0.1	100

We tailor packaged product in series and parallel arrangements according to voltage and capacitance as required.

## High Power, For Low Temperature Type Capacitors

GREEN CAP


70°C

2.7V

For -40°C

- For Low Temperature (-40°C).
- Environmentally Friendly : without environmentally hazardous substances such as Cd or Pb.
- Unlike batteries, excellent charge and discharge characteristics with no chemical reaction.

For low temperature




Marking color : White print on a brown sleeve

### Specifications

Item	Performance	
Category temperature range (°C)	-40 to +70	
Tolerance at rated capacitance (%)	-20 to +20	
Internal resistance	Refer to the Standard Ratings	
Characteristics at high and low temperature	Percentage of capacitance change	Within ±30% of the value at 20°C
	Internal resistance	Three times or less of the value at 20°C
Endurance (70°C)	Test time	1000 hours
	Percentage of capacitance change	Within ±30% of the initial measured value
	Internal resistance	Three times or less of the initial specified value
Shelf life (70°C)	Test time : 1000 hours ; same as endurance.	
Applicable standards	Conforms to JIS C5160 - 1 (IEC 62391 - 1)	

### Outline Drawing

Unit : mm

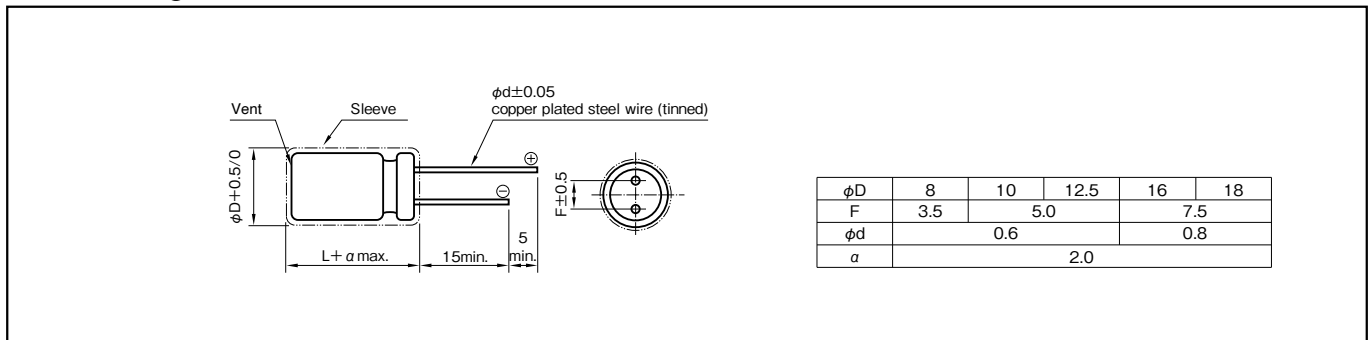

Product code system : 2.7V10F (\*For general product)

RS*	DDU	106	2R7	F30		T
Category code	Series code	capacitance code	Voltage code	Size code	Lead-forming and packing code	Additional code

Product code is refer to following table and "Product Code System" pages.

### Standard Ratings

Max. operating voltage (V)	Rated capacitance (F)	Max. Leakage Current (mA) after 24h	ELNA Parts No.	φD × L (mm)	Internal resistance (mΩ max.) at 1kHz	Internal DC resistance (mΩ Max.)
2.7	3.3	0.3	RSDDU3352R7E20 □□□ T	8 × 20	60	180
2.7	6.8	0.5	RSDDU6852R7F20 □□□ T	10 × 20	50	100
2.7	10	0.6	RSDDU1062R7F30 □□□ T	10 × 30	30	65
2.7	15	0.8	RSDDU1562R7G25 □□□ T	12.5 × 25	25	50
2.7	25	1.0	RSDDU2562R7J25 □□□ T	16 × 25	17	35
2.7	33	1.0	RSDDU3362R7J31 □□□ T	16 × 31.5	13	25
2.7	50	1.5	RSDDU5062R7K40 □□□ T	18 × 40	10	21

We tailor packaged product in series and parallel arrangements according to voltage and capacitance as required.

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

## High Power, For Low Temperature and High Voltage Tolerance Type Capacitors

GREEN CAP


65°C / 85°C

3.0V / 2.5V

For -40°C

- For Low Temperature (-40°C), High voltage tolerant (3.0V guaranteed).
- Environmentally Friendly ; without environmentally hazardous substances such as Cd or Pb.
- Unlike batteries, excellent charge and discharge characteristics with no chemical reaction.

High Voltage, High Temperature




Marking color : White print on a brown sleeve

### Specifications

Item	Performance																					
Category temperature range (°C)	-40 to +65																					
Expansion category temperature range (°C)	-40 to +85 (Applied voltage: 2.5 V or less)																					
Tolerance at rated capacitance (%)	-20 to +20																					
Internal resistance	Refer to the Standard Ratings																					
Characteristics at high and low temperature	Percentage of capacitance change	Within ±30% of the value at 20°C																				
	Internal resistance	Three times or less of the value at 20°C																				
Endurance	<table border="1"> <tr><td>Test temperature</td><td>65°C</td></tr> <tr><td>Test voltage</td><td>3.0V</td></tr> <tr><td>Test time</td><td>1000 hours</td></tr> <tr><td>Percentage of capacitance change</td><td>Within ±30% of the initial measured value</td></tr> <tr><td>Internal resistance</td><td>Three times or less of the initial specified value</td></tr> </table>	Test temperature	65°C	Test voltage	3.0V	Test time	1000 hours	Percentage of capacitance change	Within ±30% of the initial measured value	Internal resistance	Three times or less of the initial specified value	<table border="1"> <tr><td>Test temperature</td><td>85°C</td></tr> <tr><td>Test voltage</td><td>2.5V</td></tr> <tr><td>Test time</td><td>1000 hours</td></tr> <tr><td>Percentage of capacitance change</td><td>Within ±30% of the initial measured value</td></tr> <tr><td>Internal resistance</td><td>Three times or less of the initial specified value</td></tr> </table>	Test temperature	85°C	Test voltage	2.5V	Test time	1000 hours	Percentage of capacitance change	Within ±30% of the initial measured value	Internal resistance	Three times or less of the initial specified value
	Test temperature	65°C																				
Test voltage	3.0V																					
Test time	1000 hours																					
Percentage of capacitance change	Within ±30% of the initial measured value																					
Internal resistance	Three times or less of the initial specified value																					
Test temperature	85°C																					
Test voltage	2.5V																					
Test time	1000 hours																					
Percentage of capacitance change	Within ±30% of the initial measured value																					
Internal resistance	Three times or less of the initial specified value																					
Shelf life (85°C)	Test time : 1000hours ; same as endurance.																					
Applicable standards	Conforms to JIS C5160 - 1 (IEC 62391 - 1)																					

### Outline Drawing

Unit : mm

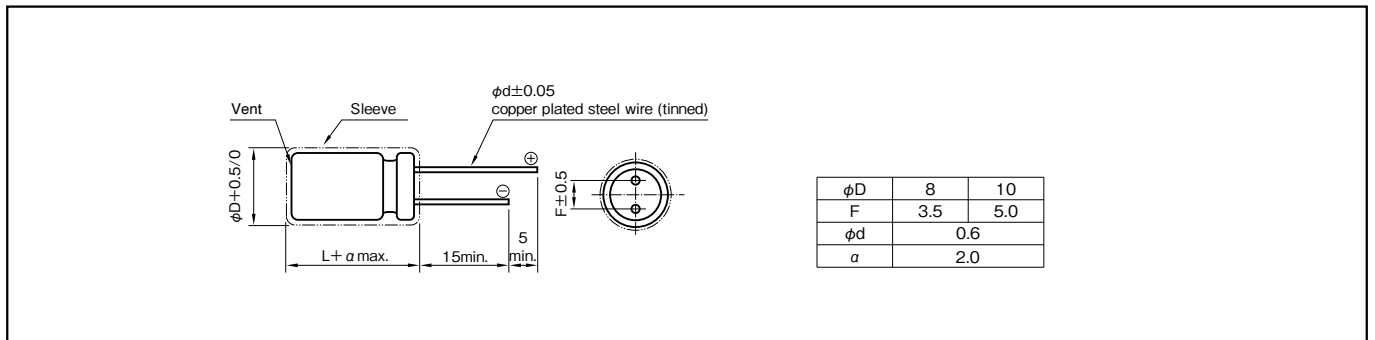

Product code system : 3.0V10F (\*For general product)

RS*	DUK	106	3R0	F30	□	T
Category code	Series code	capacitance code	Voltage code	Size code	Lead-forming and packing code	Additional code

Product code is refer to following table and "Product Code System" pages.

### Standard Ratings

Max. operating voltage (V)	Rated capacitance (F)	Max. Leakage Current (mA) after 24h	ELNA Parts No.	φD × L (mm)	Internal resistance (mΩ max.) at 1kHz	Internal DC resistance (mΩ Max.)
3	1	0.2	RSDUK1053R0E12 □□□ T	8 × 12	300	1500
3	3.3	0.3	RSDUK3353R0E20 □□□ T	8 × 20	90	500
3	6.8	0.5	RSDUK6853R0F20 □□□ T	10 × 20	70	250
3	10	0.6	RSDUK1063R0F30 □□□ T	10 × 30	55	150
3	15	0.8	RSDUK1563R0F40 □□□ T	10 × 40	40	120

We tailor packaged product in series and parallel arrangements according to voltage and capacitance as required.

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.


## Packed Type Capacitors

GREEN CAP

70 °C

5.0V

- High-voltage capacitor which connected DZN in series.
- Environmentally Friendly : without environmentally hazardous substances such as Cd or Pb.
- Unlike batteries, excellent charge and discharge characteristics with no chemical reaction.




Marking color : White print on a blue sleeve

## Specifications

Item	Performance	
Category temperature range (°C)	-25 to +70	
Tolerance at rated capacitance (%)	-20 to +80	
Internal resistance at 1 kHz	Refer to the Standard Ratings	
Characteristics at high and low temperature	Percentage of capacitance change	Within ±30% of the value at 20°C
	Internal resistance	Five times or less of the value at 20°C
Endurance (70°C)	Test time	1000 hours
	Percentage of capacitance change	Within ±30% of the initial measured value
	Internal resistance	Four times or less of the initial specified value
Shelf life (70°C)	Test time : 1000hours ; same as endurance.	
Applicable standards	Conforms to JIS C5160 - 1 (IEC 62391 - 1)	

## Outline Drawing

Unit : mm

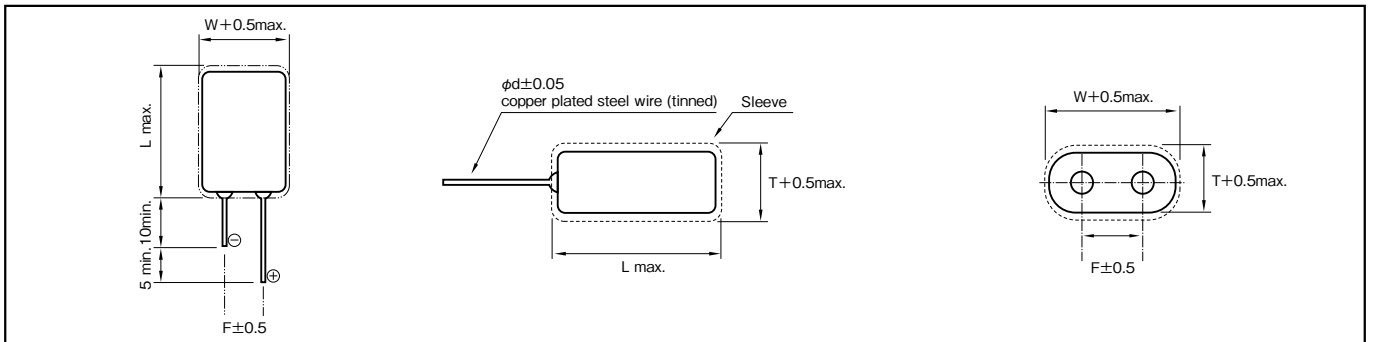

## Product code system (\*1:For general product)

RS*1	DZP	474	5R0	E16	0A0*2	NT
Category code	Series code	capacitance code	Voltage code	Size code	Lead-forming and packing code	Additional code

Product code is refer to next page table and "Product Code System" pages.

\*2 The code for long lead standard packing.

## Standard Ratings

Max. operating voltage (V)	Rated capacitance (F)	Max. Leakage Current (mA) after 24h	ELNA Parts No.	T × W × L (mm)	φd	F	Internal resistance (Ω max.) at 1kHz	Internal resistance (mΩ) at 1kHz (measurement value)
5.0	0.47	0.2	RSDZP4745R0E160A0NT	8.5 × 17.0 × 16.0	0.6	5.1	0.6	300
			RSDZP4745R0E160A1NT			12.1		
5.0	1.0	0.3	RSDZP1055R0E240A2NT	8.5 × 17.0 × 24.0	0.6	5.1	0.6	240
			RSDZP1055R0E240A3NT			12.1		
5.0	1.5	0.4	RSDZP1555R0E240A2NT	8.5 × 17.0 × 24.0	0.6	5.1	0.6	200
			RSDZP1555R0E240A3NT			12.1		
5.0	3.3	0.8	RSDZP3355R0F290A0NT	10.5 × 21.0 × 29.0	0.6	5.5	0.2	100
			RSDZP3355R0F290A1NT			15.5		
5.0	4.7	1.0	RSDZP4755R0F390A0NT	10.5 × 21.0 × 39.0	0.6	5.5	0.2	70
			RSDZP4755R0F390A1NT			15.5		

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

### 1 Description of Electric Double Layer Capacitor

#### 1-1 Basic Concepts

Generally capacitors are constructed with a dielectric placed between opposed electrodes, functioning as capacitors by accumulating charges in the dielectric material. Aluminum electrolytic and tantalum electrolytic capacitors, for example, use an aluminum oxide film and a tantalum oxide film as the dielectric, respectively.

On the other hand, Electric Double Layer Capacitors have no visible dielectric in a general sense but utilize the state referred to as the electric double layer, which is developed naturally on the interface between substances, as the function of dielectric.

#### 1-2 Operating Principle

The Electric Double Layer represents the state in which positive and negative charges exist at a very short distance on the boundary where contact occurs between two different substances (e.g. solid and liquid). By externally applying a voltage below a certain voltage to the boundary, higher charges can be accumulated. Accordingly, charge and discharge of electric double layer capacitors utilize adsorption and desorption of ions to the ionic adsorption layer (Electric Double Layer) formed on the electrode surface of the activated carbon used for electrodes.

Applying DC voltage externally across the electrodes of the Electric Double Layer allows almost no passage of current up to a certain voltage, exhibiting a condition like insulation.

However, the application of voltages exceeding the certain voltage causes electrolysis to occur in the electrolyte, resulting in abrupt passage of current.

This voltage determines the resistance of voltage of an Electric Double Layer Capacitor. We use an organic electrolyte and its standard electrolysis occurs at the voltage of about 2.5 to 3V.

#### 1-3 Advantages and Disadvantages of Electric Double Layer Capacitor

##### [Advantages]

- (1) Small size and capacitance in farads (F) available by utilizing the activated carbon electrode with a large surface area
- (2) No special charging circuit and constrains during discharge are required.
- (3) No effect on the life through overcharging and overdischarging
- (4) Environmentally clean energy

##### [Disadvantage]

- (1) The life is limited due to the use of electrolyte.
- (2) Series connection is required when used with a low resistance of voltage at a high voltage.
- (3) Cannot be used in AC circuits due to high internal resistance unlike aluminum electrolytic capacitors.

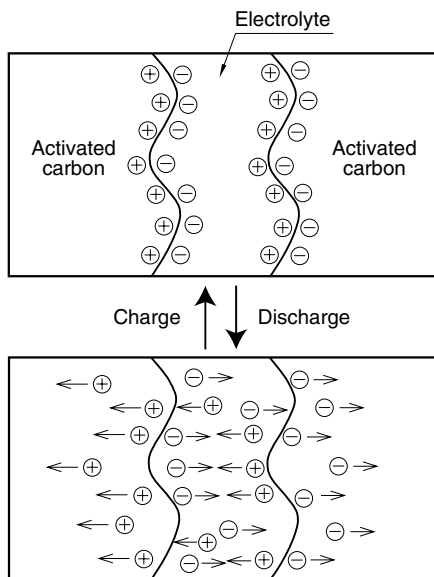


Fig.1 Schematic of Principle of Electric Double Layer Capacitor

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

### 1-4 Construction of DYNACAP

The series which consists of coin cells is similar to that of coin-type batteries as shown in Fig.2. DYNACAP contains a single cell or two to three cells stacked in series.

Since these series have a large electrode-to-electrode distance and a small electrode area exhibiting a large internal resistance, they are suitable for the memory backup application that involves microcurrent discharge.

The cylindrical cell construction as seen in the DZ1 and DZN series has the construction similar to that of aluminum electrolytic capacitors as shown in Fig.3.

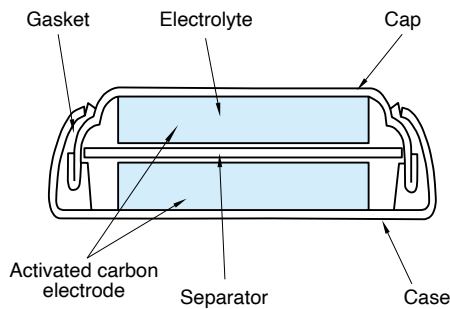


Fig.2 Example of Basic Construction of Coin Cell

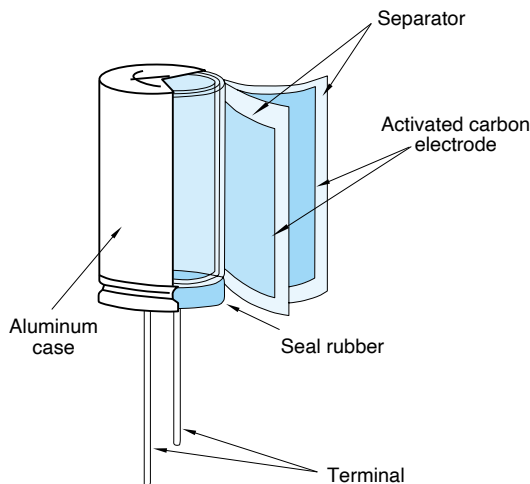


Fig.3 Example of Basic Construction of Cylindrical Cell

These series have a small electrode-to-electrode distance, allowing a large electrode area because of the winding structure. This decreases the internal resistance, which is primary suitable for applications requiring high-power such as motor drive and LED lighting that need high currents.

### 2 Description of Life Expectancy

Generally, the life of Electric Double Layer Capacitors is largely affected by the ambient temperature.

The expected life is approximated by the equation as shown below:

$$L = L_0 \times 2^{\left( \frac{T_0 - T}{10} \right)}$$

Where,

- L : Expected lifetime at temperature T
- L<sub>0</sub> : Lifetime at temperature T<sub>0</sub>
- T : Expected working temperature
- T<sub>0</sub> : Upper category temperature

Note that the above equation does not cover charge and discharge. In the case of charge and discharge, heat generation occurs inside a capacitor; the temperature rise by this heat generation must also be considered.

The expected life time is a maximum as a guide in terms of deterioration of the sealant.

Coin cell type : about ten years

Cylindrical type : about fifteen years

NOTE : Design, Specifications are subject to change without notice. It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

## 3 Calculation Method of Discharge Time

### 3-1 Approximating the Discharge Time of Basic Constant Current Discharge

The discharge time at the constant current of a capacitor can be calculated by the following equation.

$$t = (C \times \Delta V) / I$$

Where,

- t : Discharge time (sec.)
- C : Capacitor capacitance (F)
- $\Delta V$  : Working voltage range (V)
- I : Discharge current (A)

As an example, we calculate the discharge time when a capacitor of the CB1 series 5.5V 1F is charged with 5V and discharged to 3V at a constant current of 1 mA. Since the working voltage range  $\Delta V$  is 2V from 5 – 3V,  $t = (1F \times 2V) / 0.001A$  from the above equation, and the discharge time can be calculated as 2,000 seconds (about 33 minutes). Note that the actual discharge time may be different because this equation does not cover the effect of the self-discharge and the IR drop by internal resistance described below.

### 3-2 Effect of Self-discharge at Microcurrents

When backup is made by discharge with a microcurrent below some  $\mu A$  especially for the memory backup application and the like, the discharge time must be determined while taking into account the self-discharge as shown in Fig.4.

The value closer to the actual discharge curve is obtained by adding the voltage drop through the self-discharge determined from the voltage retention characteristic test to the discharge curve given by calculation.

Note that the value of self-discharge varies by the charge time, charging current and an ambient temperature.

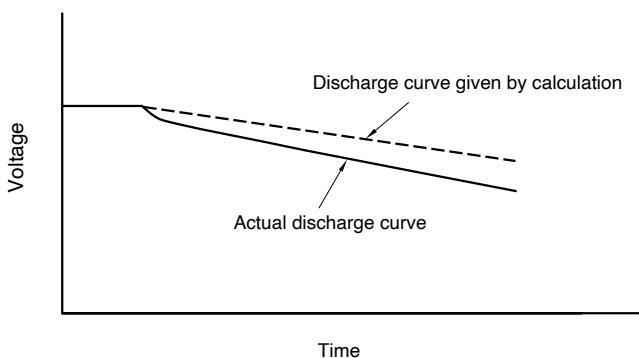


Fig.4 Example of Discharge Curve involving Self-Discharge

### 3-3 Effect of IR Drop at Large Currents

When a large Current discharge and a capacitor with a high internal resistance are used, the effect of IR drop by the product of the internal resistance and the current must be considered as shown in Fig.5. Moreover, the maximum discharge current of the product (coin cell series) of a memory backup use recommends below 1 mA/F (at 20 °C).

When a large current is required in a very short time, or a large instantaneous current flows at the start of discharge, the voltage drop indicated with  $\Delta V_1$  counts. However, when the discharge continues as it is, the discharge curve indicates in a manner showing a slow diffusion and then keeps a constant straight line.

We also make calculation including  $\Delta V_2$  of the intersection extending from the initial discharge and the discharge straight line section including the diffusion curve when indicating the DC internal resistance.

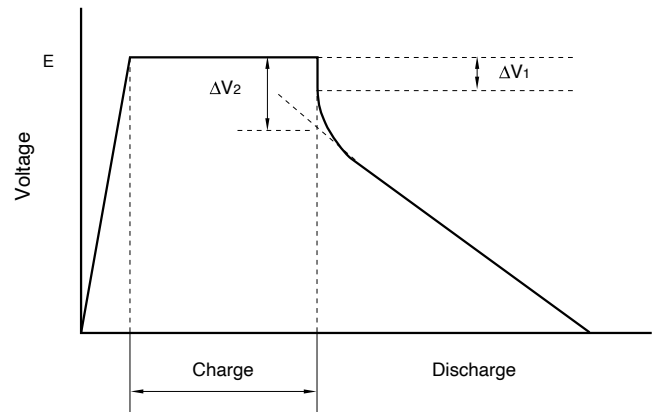


Fig.5 Example of Discharge Curve involving IR Drop

Due to IR drop, the shape of the discharge curve varies by the internal resistance and ambient temperature for each series.

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.


### 4 Series-parallel connection packaged products.

Electric Double Layer Capacitors have a low operating voltage per cell.

To deal with this, ELNA is ready to offer series packaging for high operating voltages to meet to various needs.

Please consult with us on optimization and design.

Packaged item



Example of packaged item

In case of a low voltage (up to about 24 V) for the DZ1 and DZN series with relatively low capacitance, we are preparing simple packaged products.

No full-scale voltage equalization circuit has been equipped yet, but comparatively low cost and flexible layout can be realized.

### 5 Moisture-proof provision

If a electric double layer capacitor is used in a heat-and-high-humidity environment, the characteristic will deteriorate.

Please consult when using in a heat and high humidly environment.

### 6 Regarding Recovery Voltage

After charging and then discharging the electric double layer capacitor, and further causing short-circuit to the terminals and leave them alone, the voltage between the two terminals will rise again after some interval. This voltage is called recovery voltage.


This voltage may cause the bad influence to the low-voltage driven components (CPU, memory, etc.) or damage of the capacitor with soldering.

Discharging before use is safer. It is important especially when using it by series connection.

Moreover, it is possible making the terminals in short-circuit condition at the production stage. Please consult us for adequate procedures.

### 7 Applications

#### Features & Benefits of Electric Double Layer Capacitor

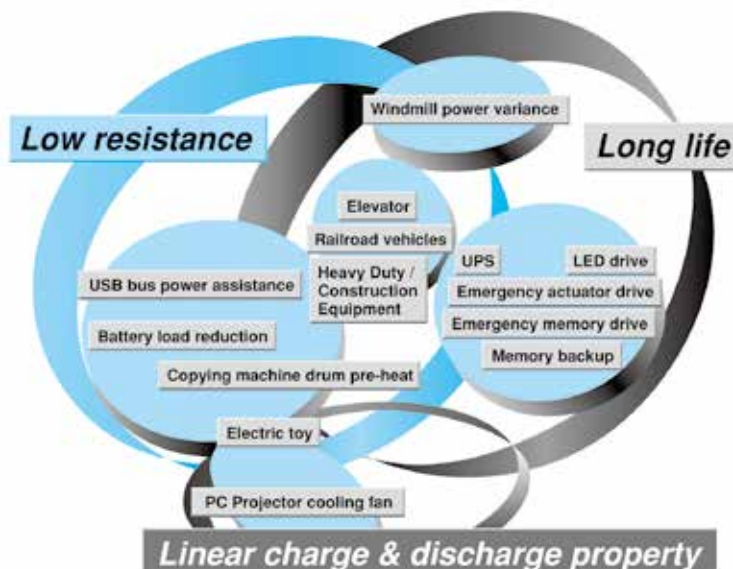

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.







## 7 Electric Characteristics Data

### 7-1 Coin type for memory back-up



DYNACAP Series CXJ  
5.5V 0.33F  $\phi$ 11.5×5L (mm)

DYNACAP Series CHL  
5.5V 0.22F  $\phi$ 13.5×9.5L (mm)





#### ■ Endurance (85°C 5.5V.DC)

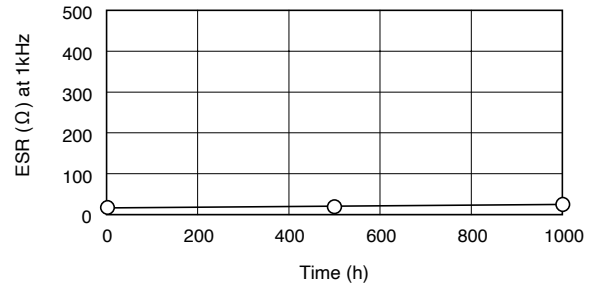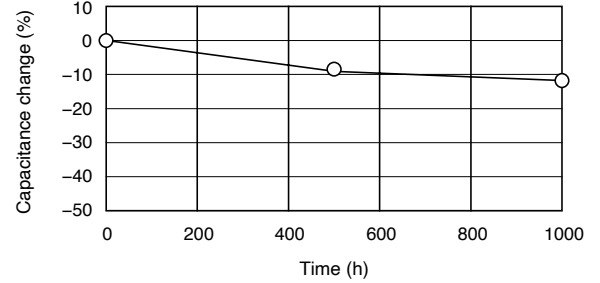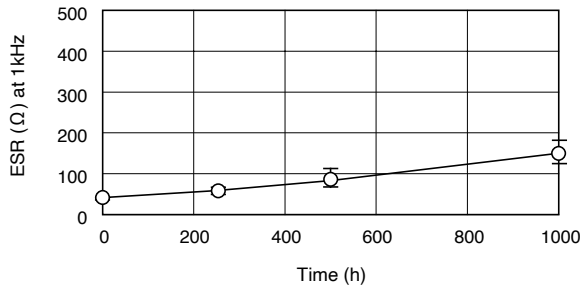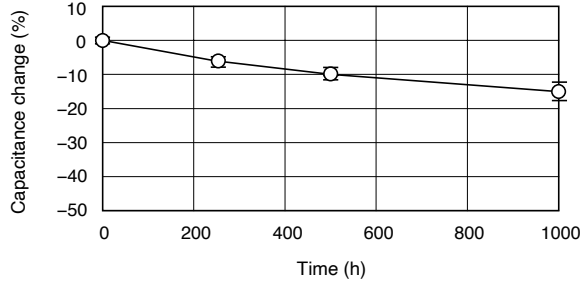

#### ■ Discharge characteristics

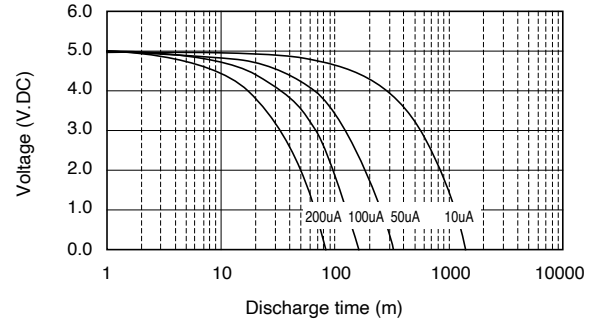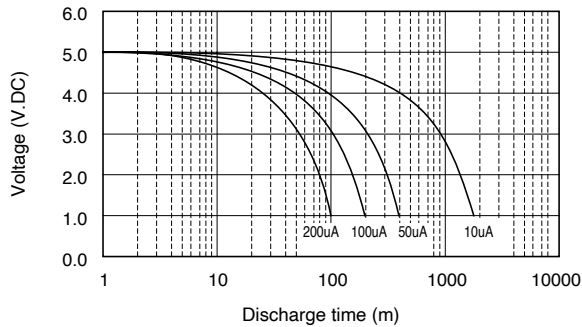



#### ■ Characteristics at high and low temperature

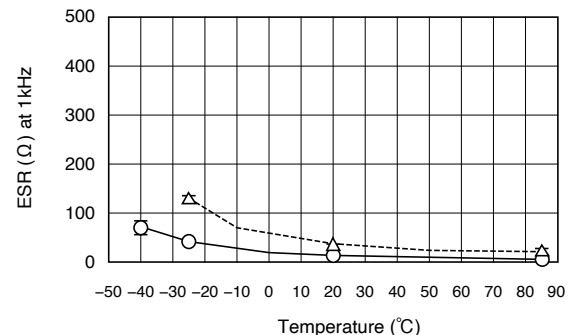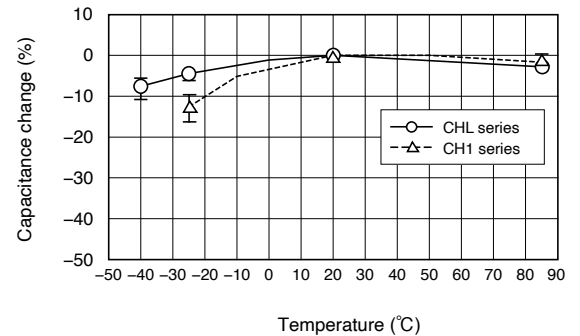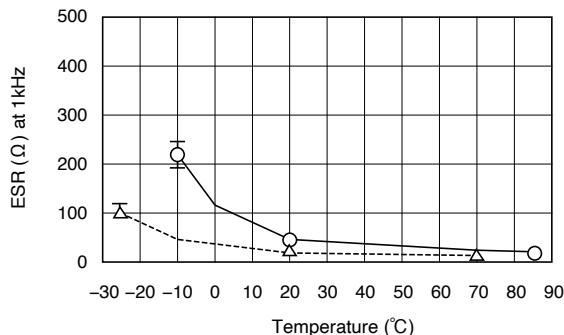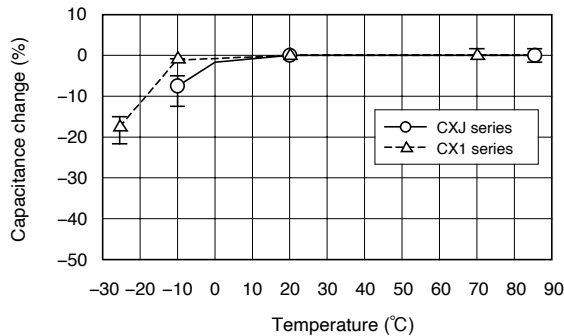


NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

DYNACAP Series CSK  
3.3V 0.2F  $\phi$ 6.8x1.4 L (mm)



■ Endurance (60°C 3.3V.DC)

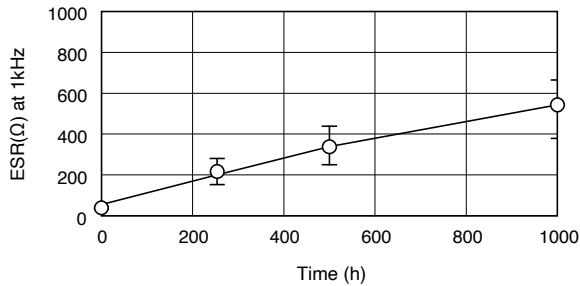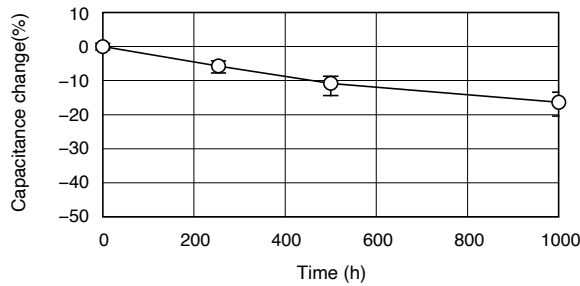

■ Discharge characteristics





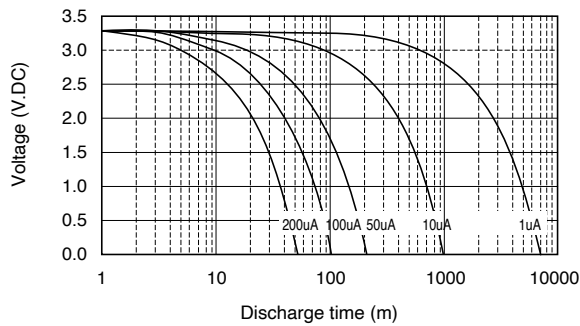


■ Characteristics at high and low temperature

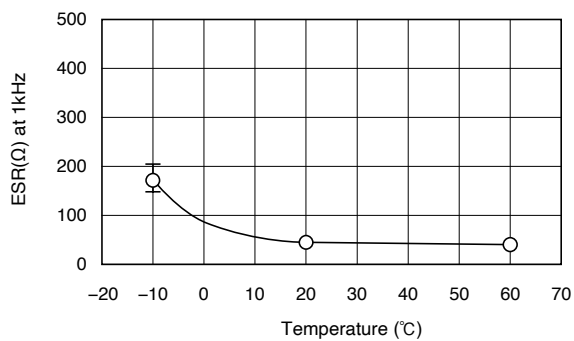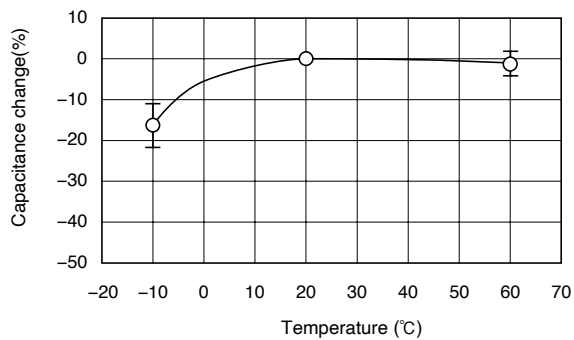

DYNACAP Series CVL  
5.5V 0.22F  $\phi$ 12.5x10.5L (mm)

■ Endurance (85°C 5.5V.DC)

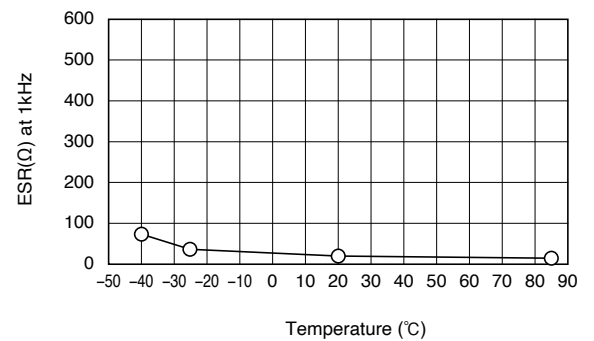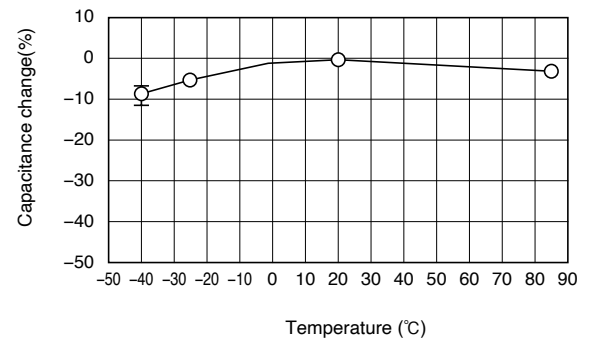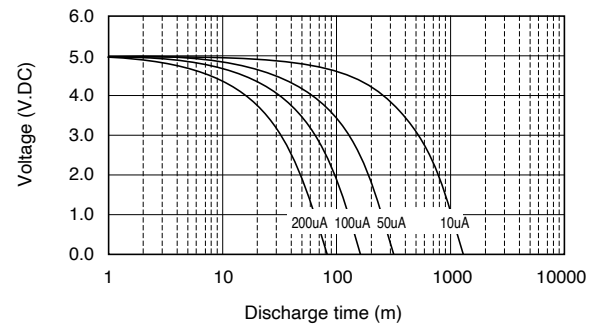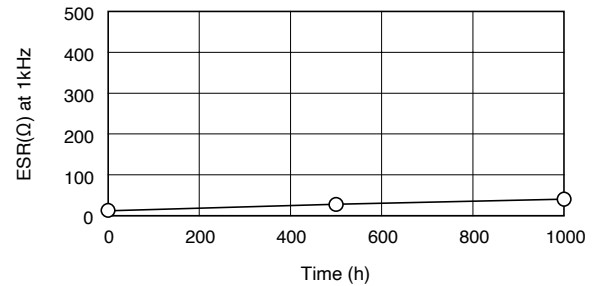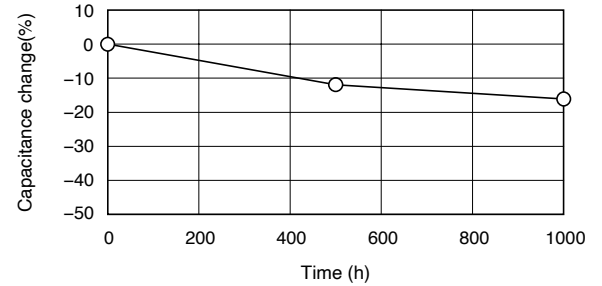


NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

### 7-2 Cylindrical type for power




DYNACAP Series DZN  
2.7V 2.7F  $\phi 8 \times 20L$  (mm)

DYNACAP Series DDU  
2.7V 25F  $\phi 16 \times 25L$  (mm)



#### ■ Endurance (70°C 2.7V.DC)

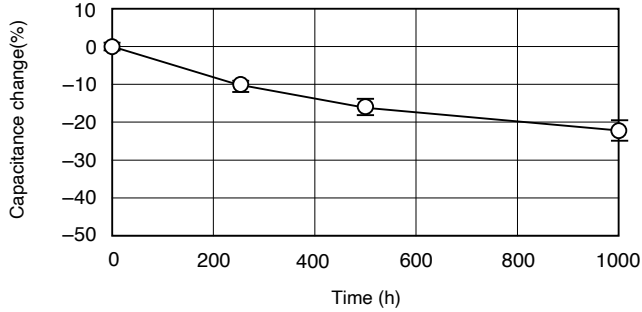



#### ■ Endurance (70°C 2.7V.DC)

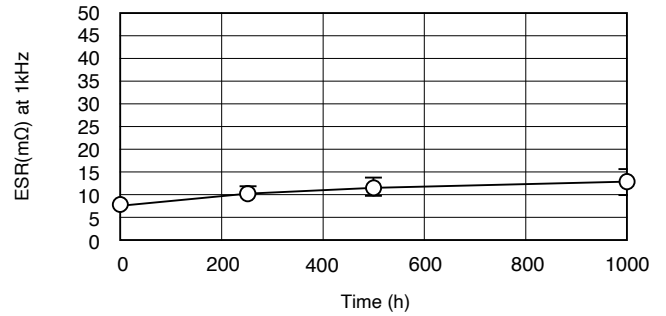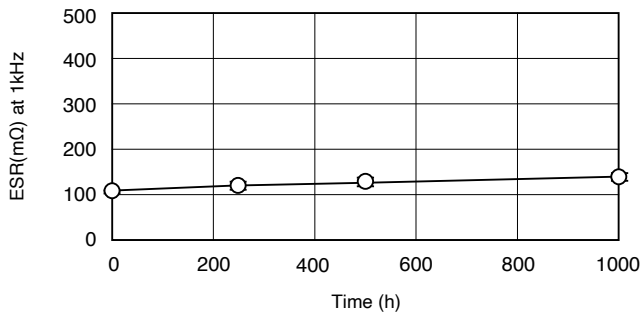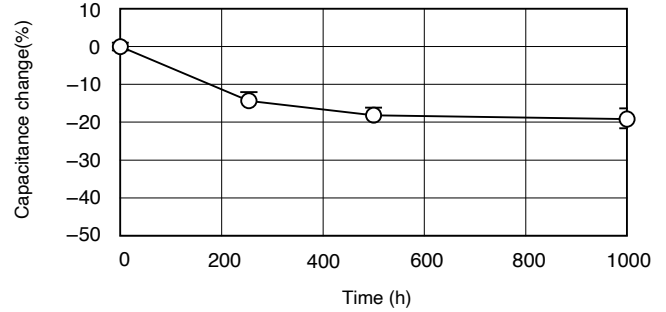

#### ■ Discharge characteristics

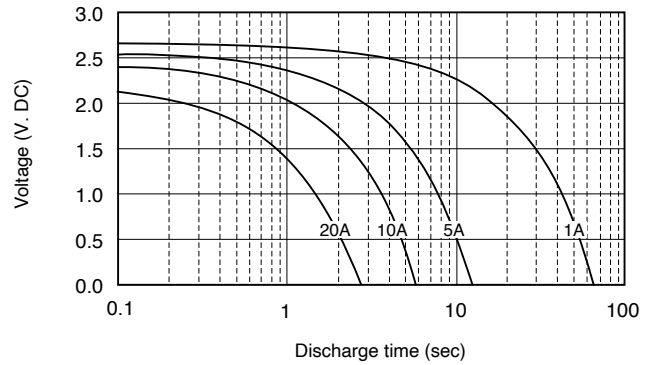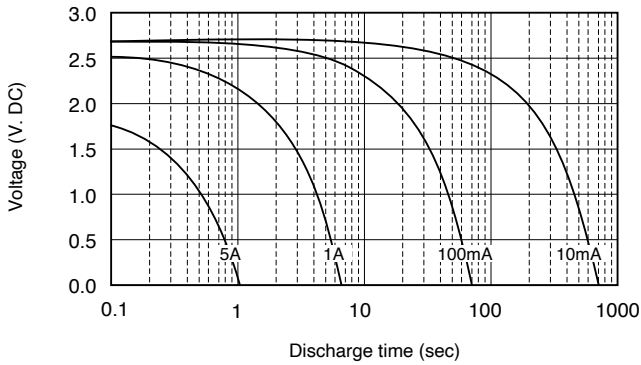

#### ■ Characteristics at high and low temperature DYNACAP Series DDU : 2.7V 25F $\phi 16 \times 25L$ (mm)

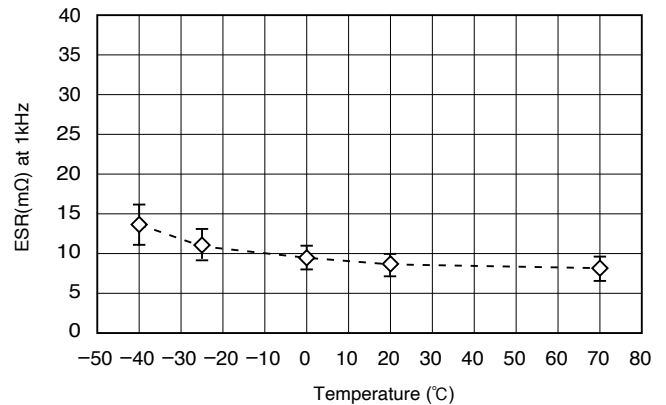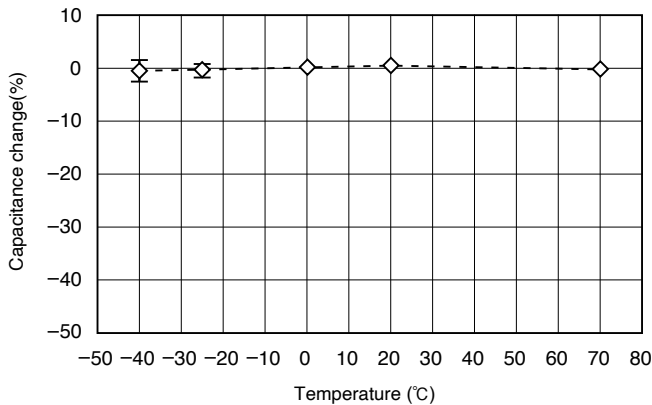

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.