


///ALPINE

SERVICE MANUAL

4 CHANNEL POWER AMPLIFIER

The signal pattern on P.W.Boards cannot cooperate with the Schematic Diagram.

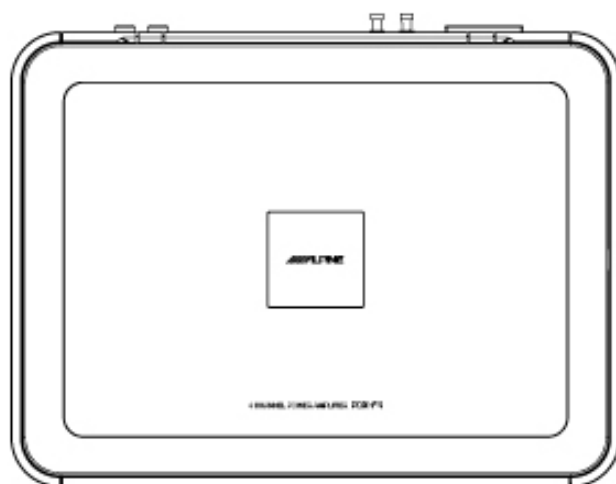

2 / 10-A
T0110900128

PDX-F4

<Cautions for Safe Repair Work>

The following cautions will prevent accidents in the workplace and will ensure safe products.

*The symbols indicate caution is needed to prevent injuries and damage to property.

The symbols and their meanings follow.

 Warning	If you ignore this symbol and handle the product incorrectly or unsafely, serious injury or death may result.
 Caution	If you ignore this symbol and handle the product incorrectly or unsafely, injury or only material damage may result.

*The following symbols indicate two levels of cautions.

 When you see this symbol, you have to be very careful.
 When you see this symbol, you have to follow the instructions there.


Warning

 Do not look squarely into the laser light coming from the pickup. You may lose your sight.	 Fuse Caution Always use a designated fuse. Use of an incorrect fuse may result in a fire.
--	--

Caution

 Do not allow wiring to be caught in the screw/chassis. If wiring is caught in the screw/chassis, it may cause a short circuit, resulting in a fire.	 Battery Caution Use the designated battery. Confirm the correct polarity and seat of the battery. An incorrect battery or an improperly connected or seated battery may result in a fire.
 High Temperature Caution Touching the heat sink may cause severe burns.	 Designated Parts Caution Look up the part list and ensure that only designated parts are used to prevent problems or accidents.
 Reverse Power Supply Connections or Misconnections Caution Reverse power supply connections or misconnections may cause ignition problems and smoke may result.	 Wiring Caution Ensure that the wiring is correct when rewiring to prevent problems with ignition/breakdown.
 Soldering Caution Hot solder from solder splash may cause severe burns.	 Wear Gloves Wear gloves to prevent electrical shocks or injury from the end face of the metal.

Packing Method View

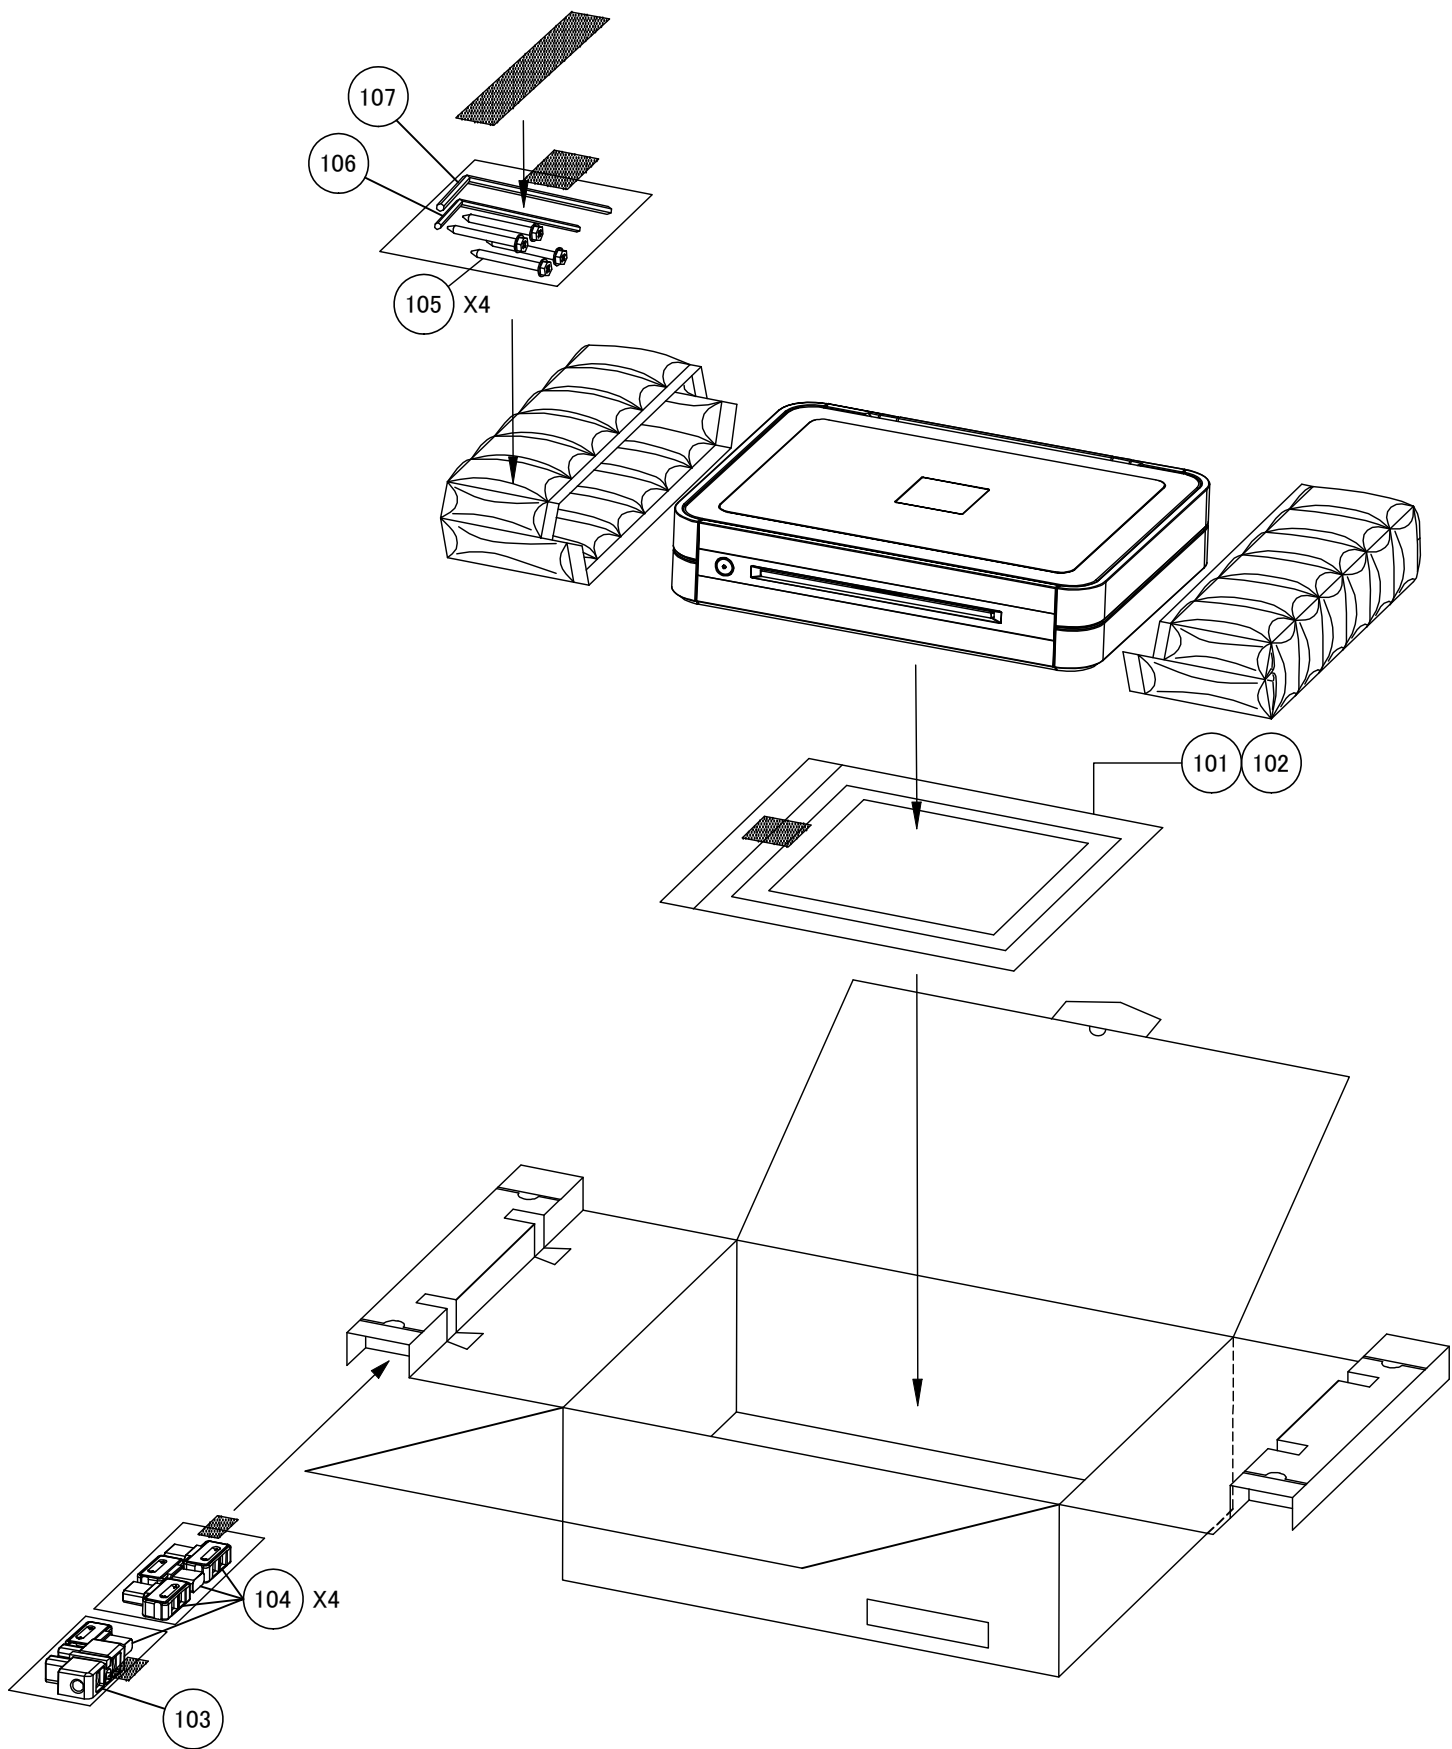

#1	101	68-13530Z50	MANUAL,OWNER'S(AO),(GO)
\$1	101	68-13530Z50	MANUAL,OWNER'S(AO),(GO)
%1	101	68-13530Z50	MANUAL,OWNER'S(AO),(GO)
&1	101	68-16909Z17	MANUAL,OWNER'S(AOCHR)
\$1	102	68-13530Z51	MANUAL,OWNER'S(I,G,S)
	103	09E41508S01	CONN,P-PLUG
	104	09E41474S01	CONN,SPK-PLUG
	105	03E41472S01	SCR,M4X36(HW)(BLK)
	106	03E36691S01	WRENCH,2X2.3
	107	47E35195S01	WRENCH,4X4.6

Mark Model Code

#1 PDX-F4(North American) Only,

\$1 PDX-F4(European) Only,

%1 PDX-F4(General Foreign) Only,

&1 PDX-F4(Chinese) Only,


Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

#####

Extension Cable

*Always connect the Extension Cable when making checks of voltage and repair.

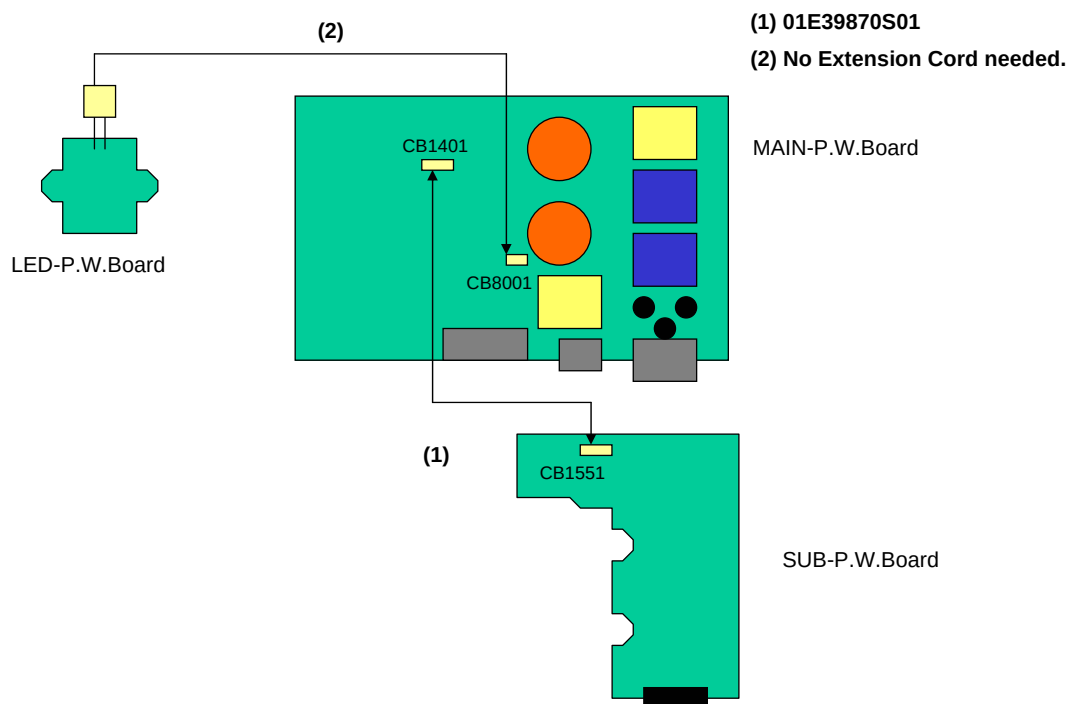



Specifications

Power Output	(1) 20Hz, 4ohm, 1.0% T.H.D. (14.4V)	100W
	1kHz, 4ohm, 1.0% T.H.D. (14.4V)	100W
	(2) 20Hz, 2ohm, 1.0% T.H.D. (14.4V)	100W
	1kHz, 2ohm, 1.0% T.H.D. (14.4V)	100W
T.H.D. (1kHz, 10W/ 4ohm (14.4V))		0.3%
Residual Noise (Input Short, Non-Filter)		4mV
S/N Ratio (Input Short)	(1) Ref.Output 1W/ 4ohm, CEA-2006	78dB
	(2) Ref.Output 100W/ 4ohm	98dB
Frequency Response (Ref.Output 1W/ 4ohm, Ref.Frequency 1kHz)		10Hz : -0.5±2dB
		120kHz : -3.0±2dB
Output Offset Voltage (No Signal)		±150mV
Input Sensitivity (Ref.Output 100W/ 4ohm, 1kHz) (Volume Position : MAX)		0.2V±3dB
LPF/HPF Characteristic (Ref.Output 1W/ 4ohm, 1kHz)	(1) VR 400Hz Position at 400Hz (LPF)	-3.0±2dB
	(2) VR 400Hz Position at 400Hz (HPF)	-3.0±2dB
Remote On Voltage		6.4±1.0V
Current Drain	(1) No Signal	2.2A
	(2) 10% T.H.D., 2ohm Load	80A
	(3) Remote Current Drain	0.33±0.2mA
	(4) Back Up Current Drain	1.2mA
Input Impedance (Reference)		21.08Kohm±10%
Fuse Requirement		30A(Peak) x 2 (For Battery Line)
Power Source		DC14.4V (11~16V)
Dimensions (W x H x D)		257 x 50.8 x 192mm
Weight		2.87kg


NOTE : Due to Continuing product improvement, specifications and designs are subject to change without notice.


Block Diagram

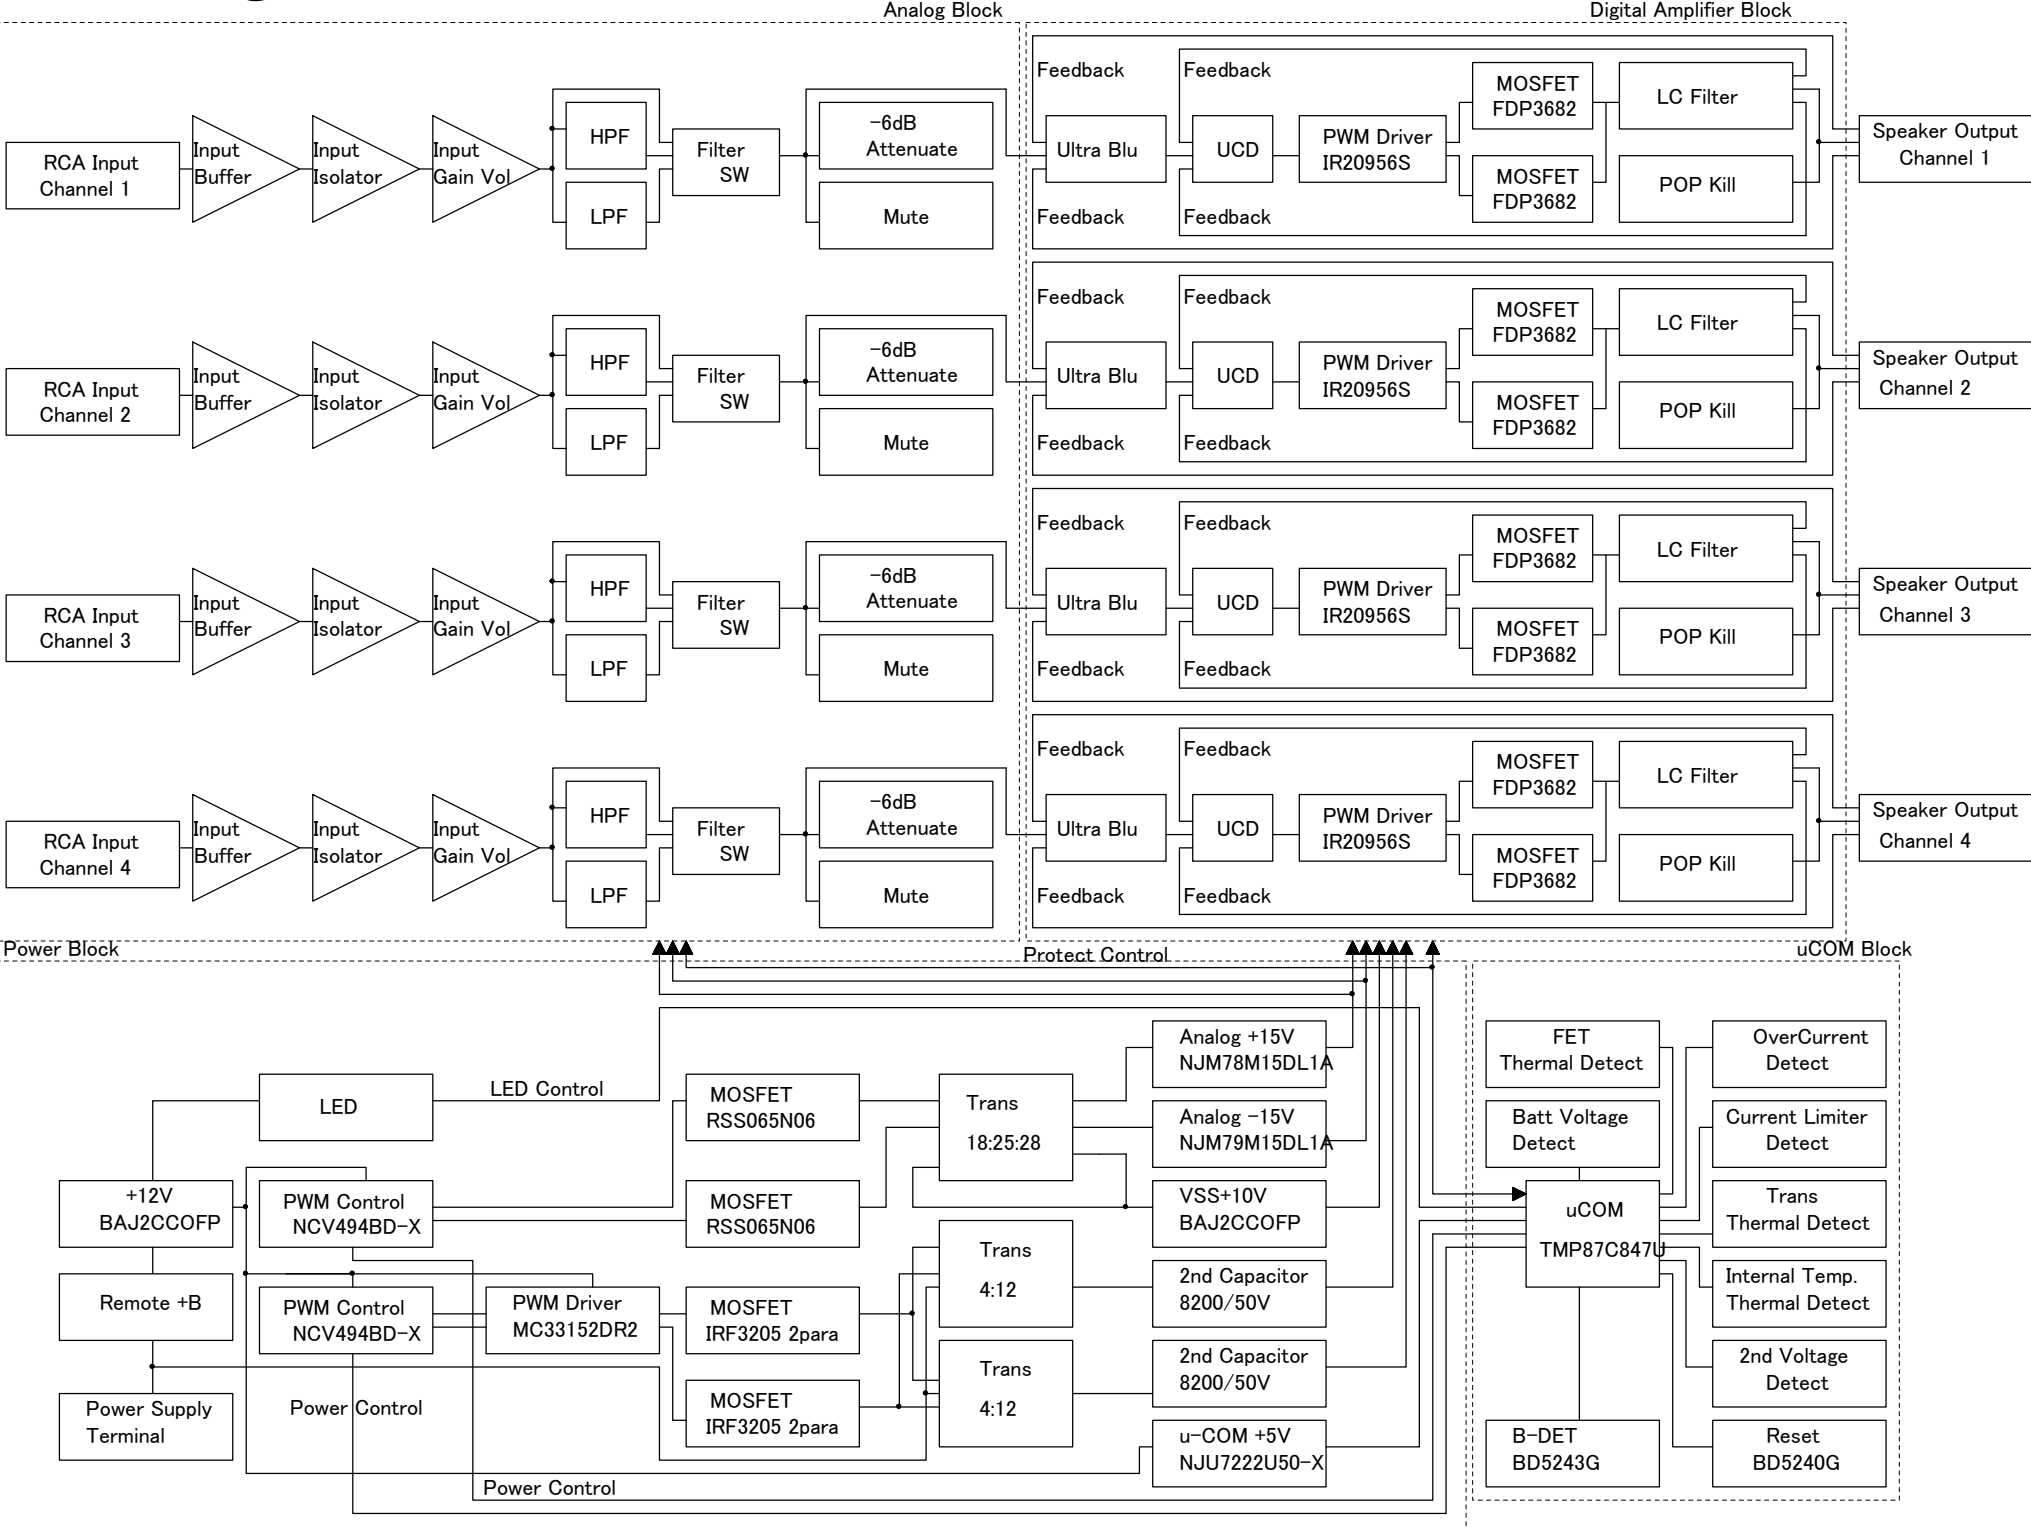




NOTE:N.U.is Not Used Parts.




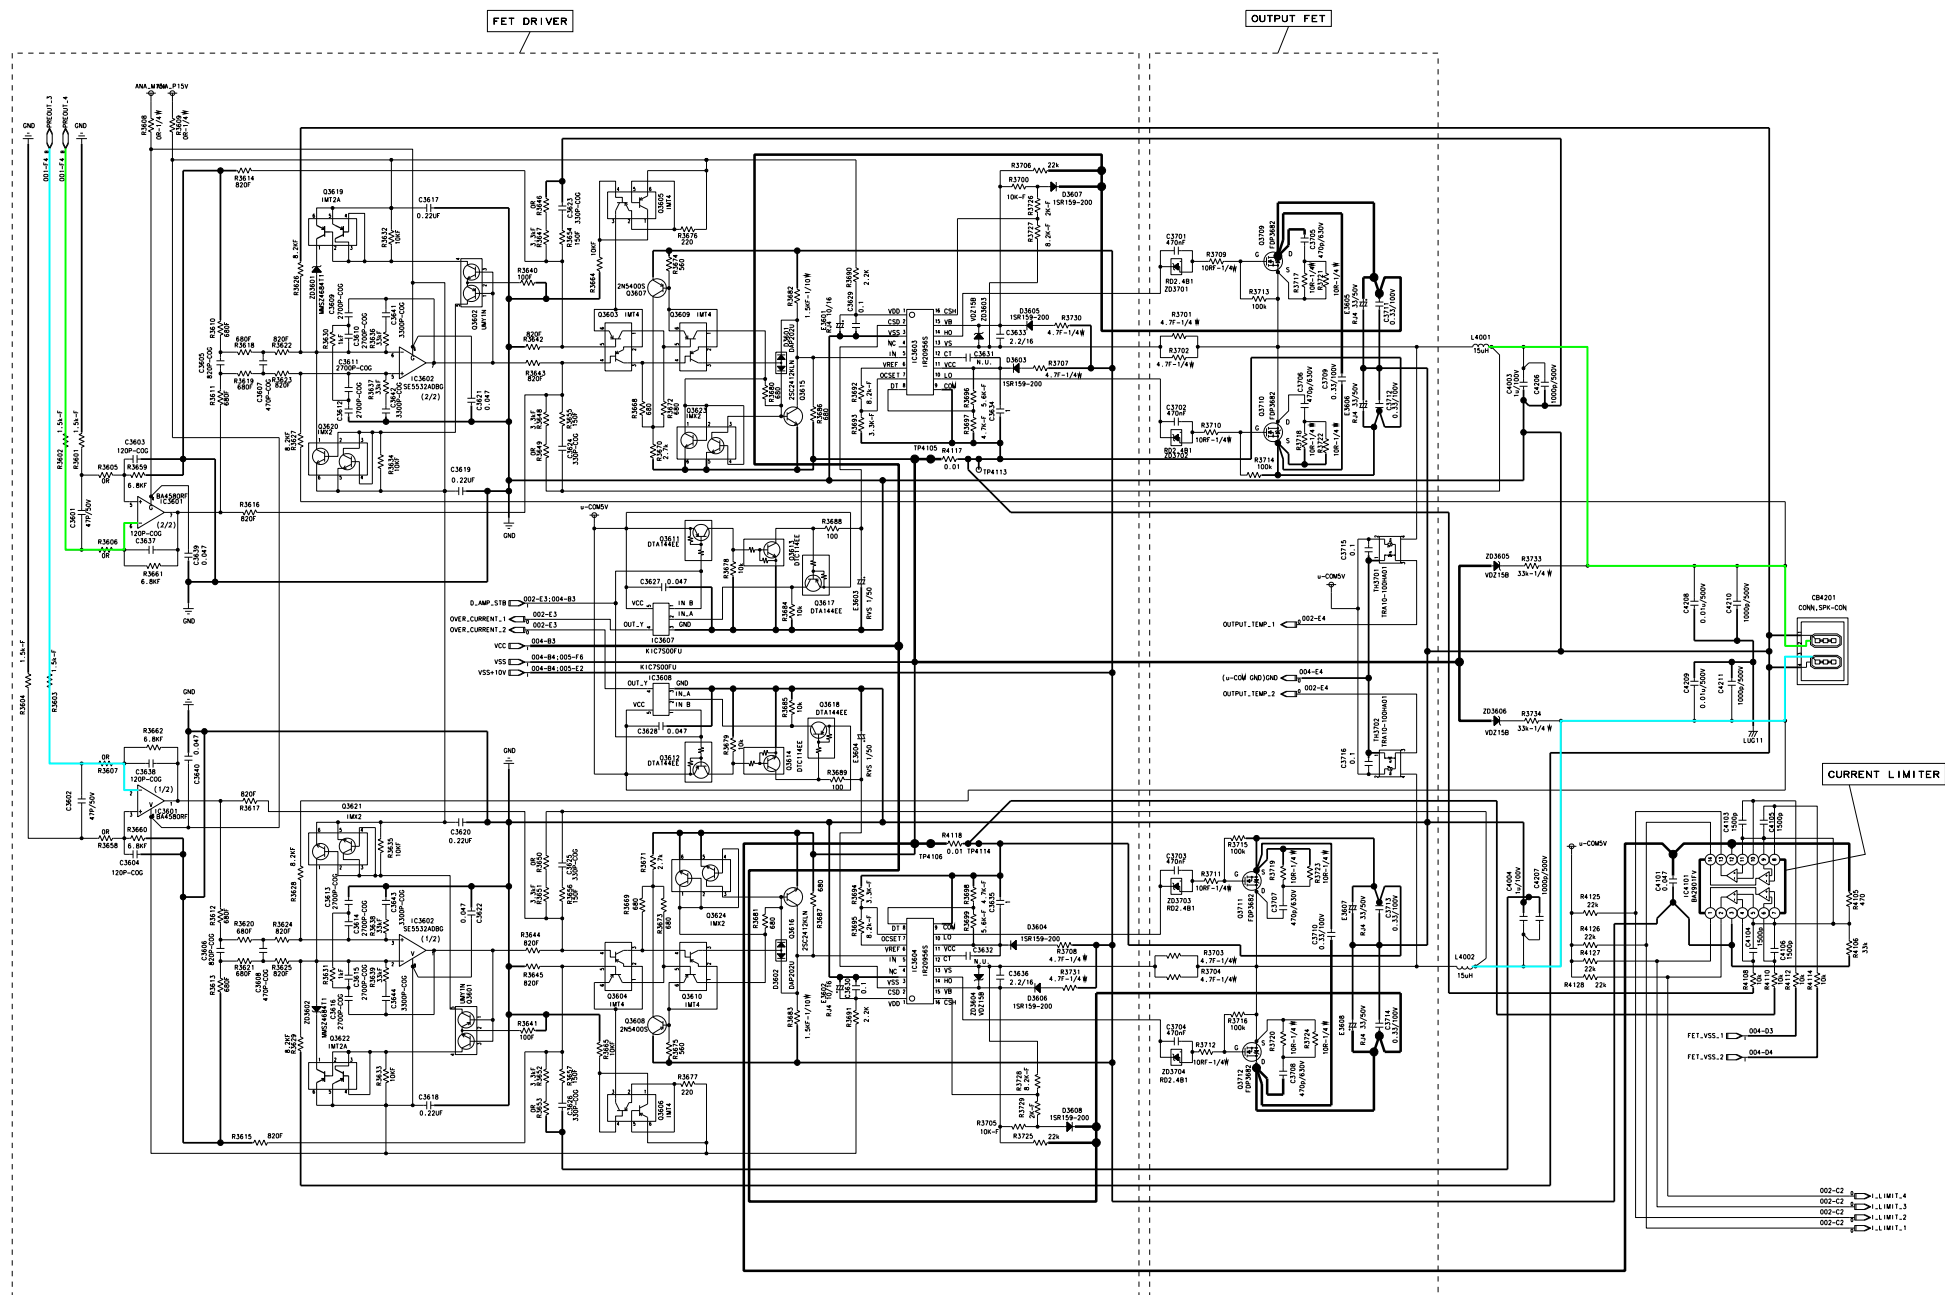


NOTE:N.U.is Not Used Parts.

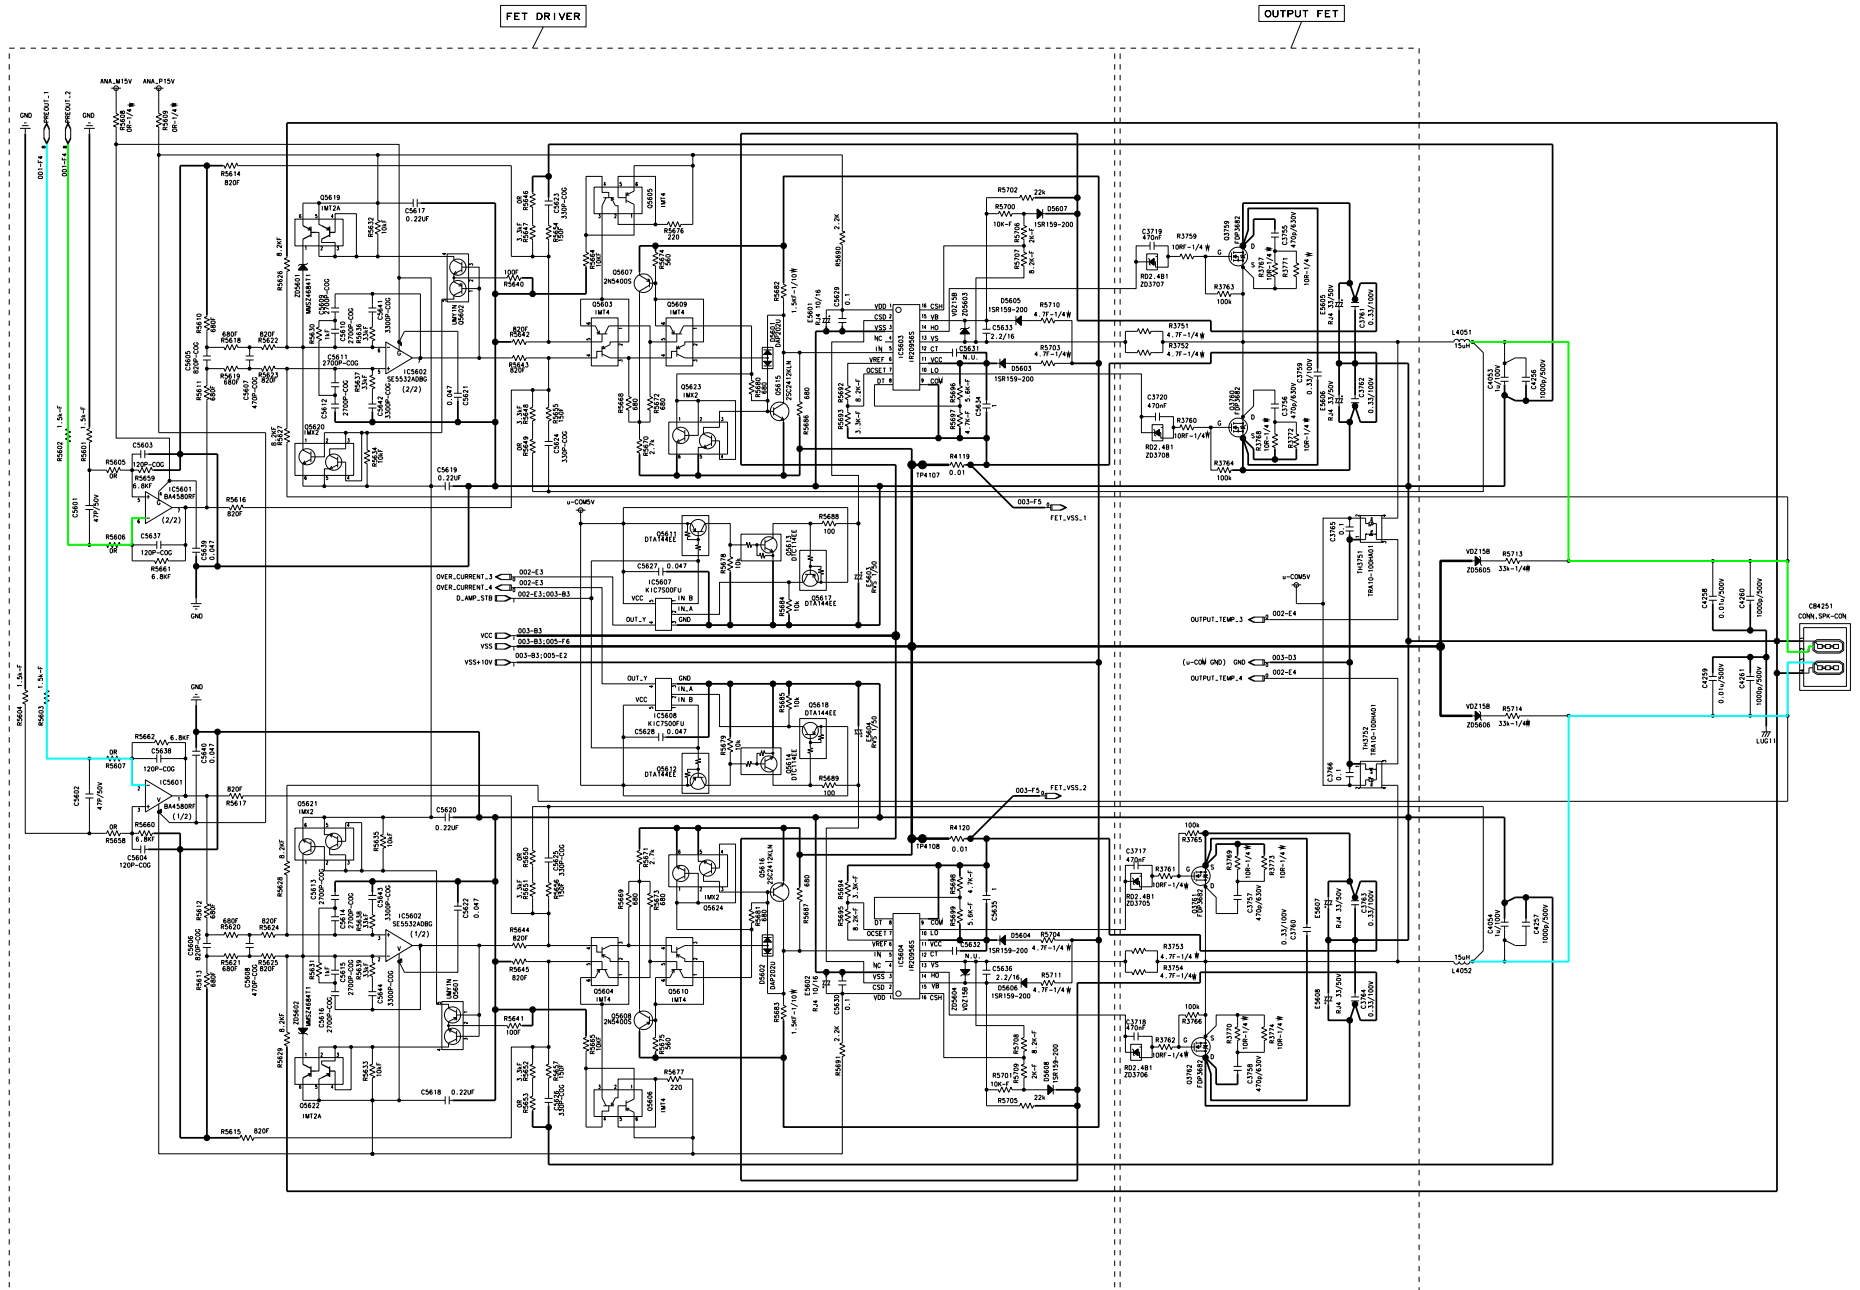

NOTE:N.U.is Not Used Parts.

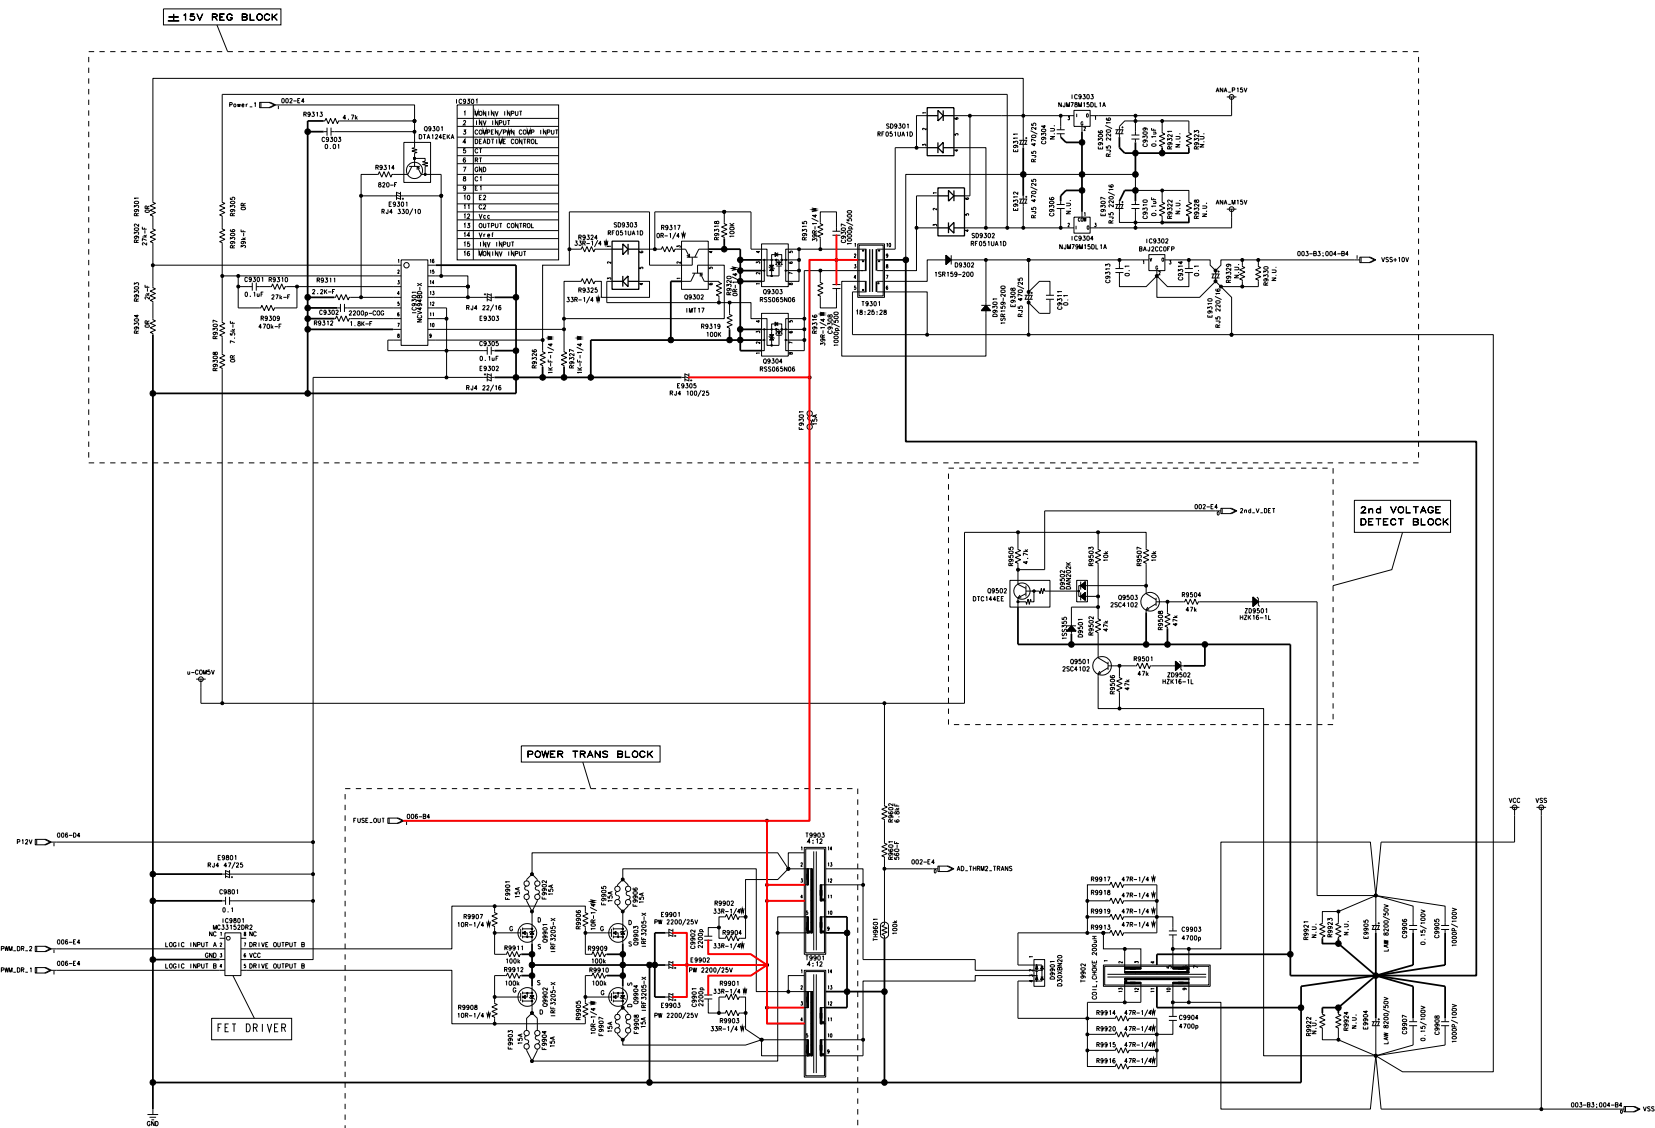




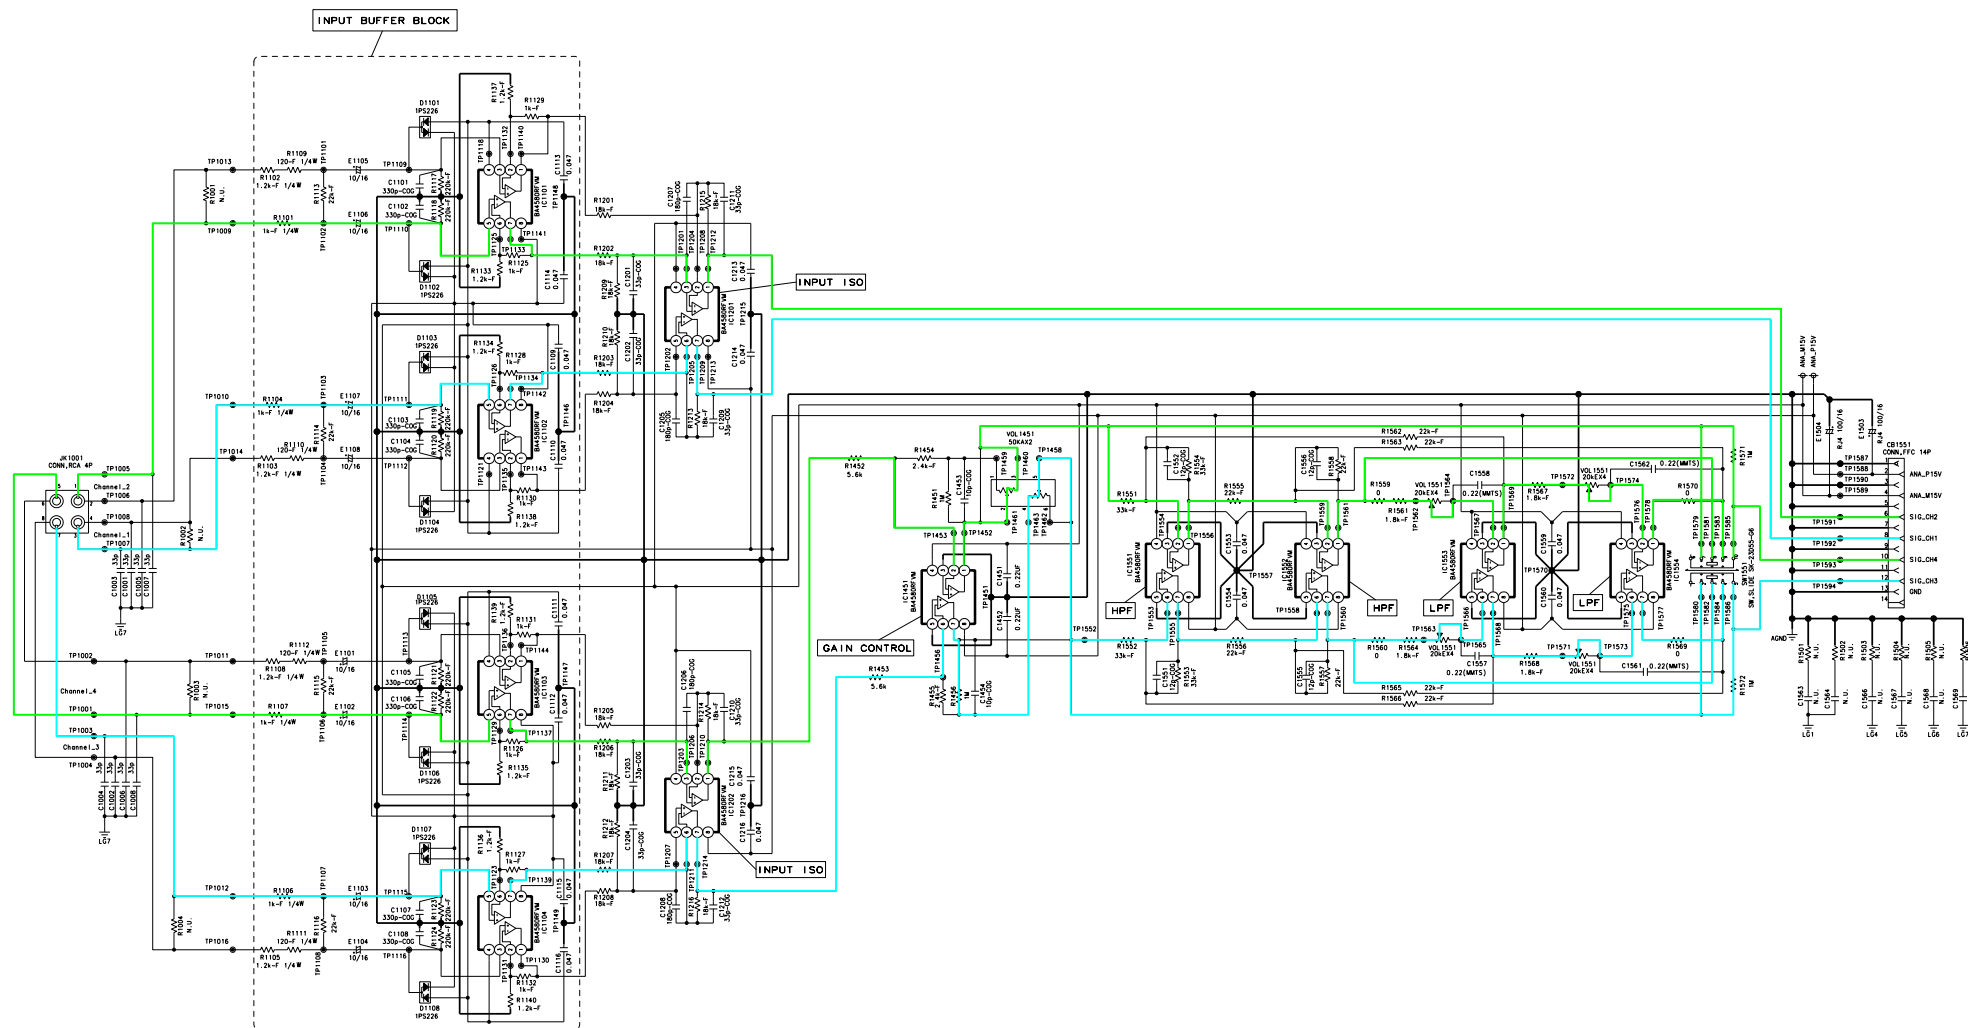


NOTE:N.U.is Not Used Parts.

LED-P.W.Board




NOTE:N.U.is Not Used Parts.

MAIN-P.W.Board

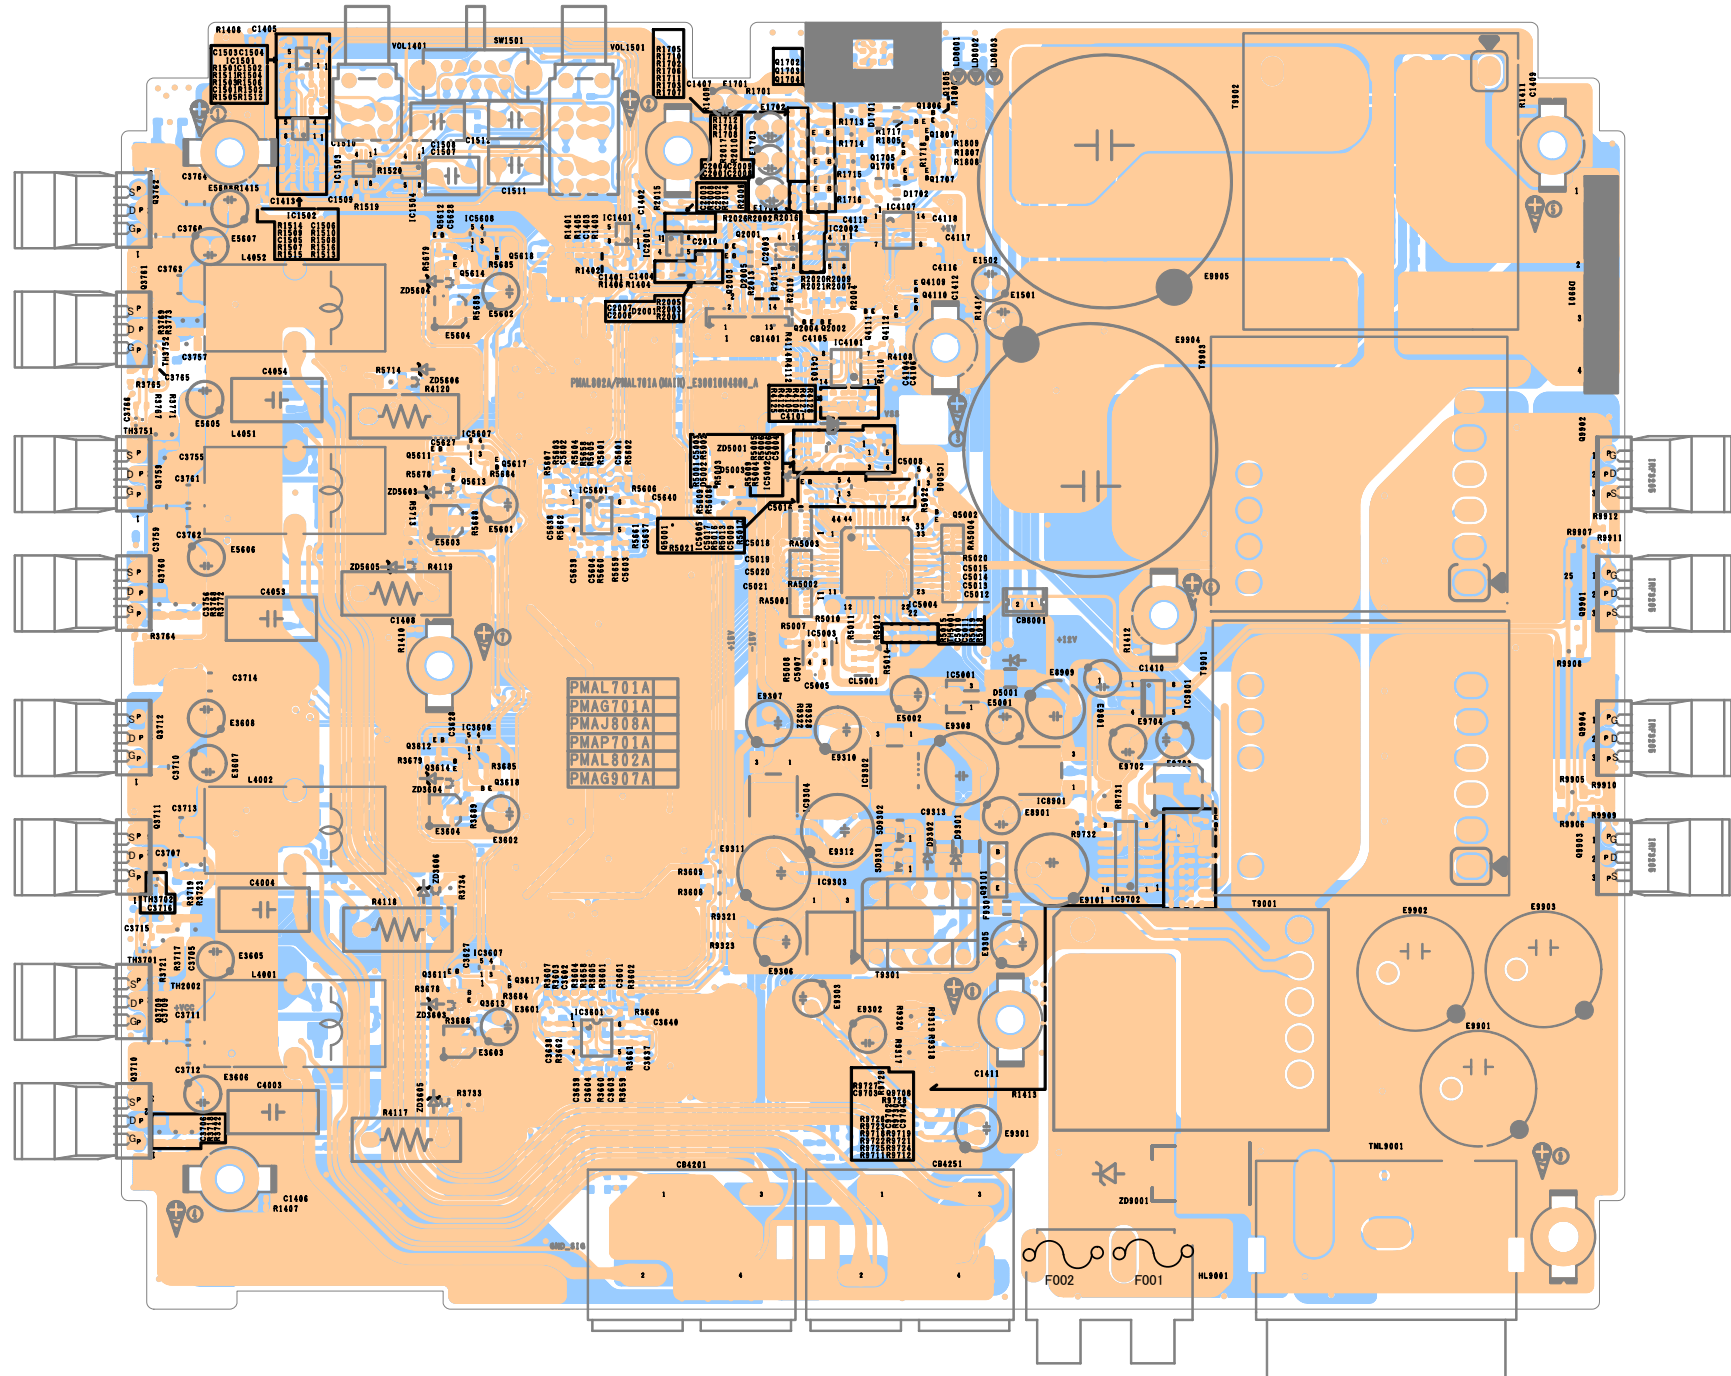

Orange Color Pattern:Component Side Pattern
Blue Color Pattern:Foil Side Pattern

MAIN-P.W.Board

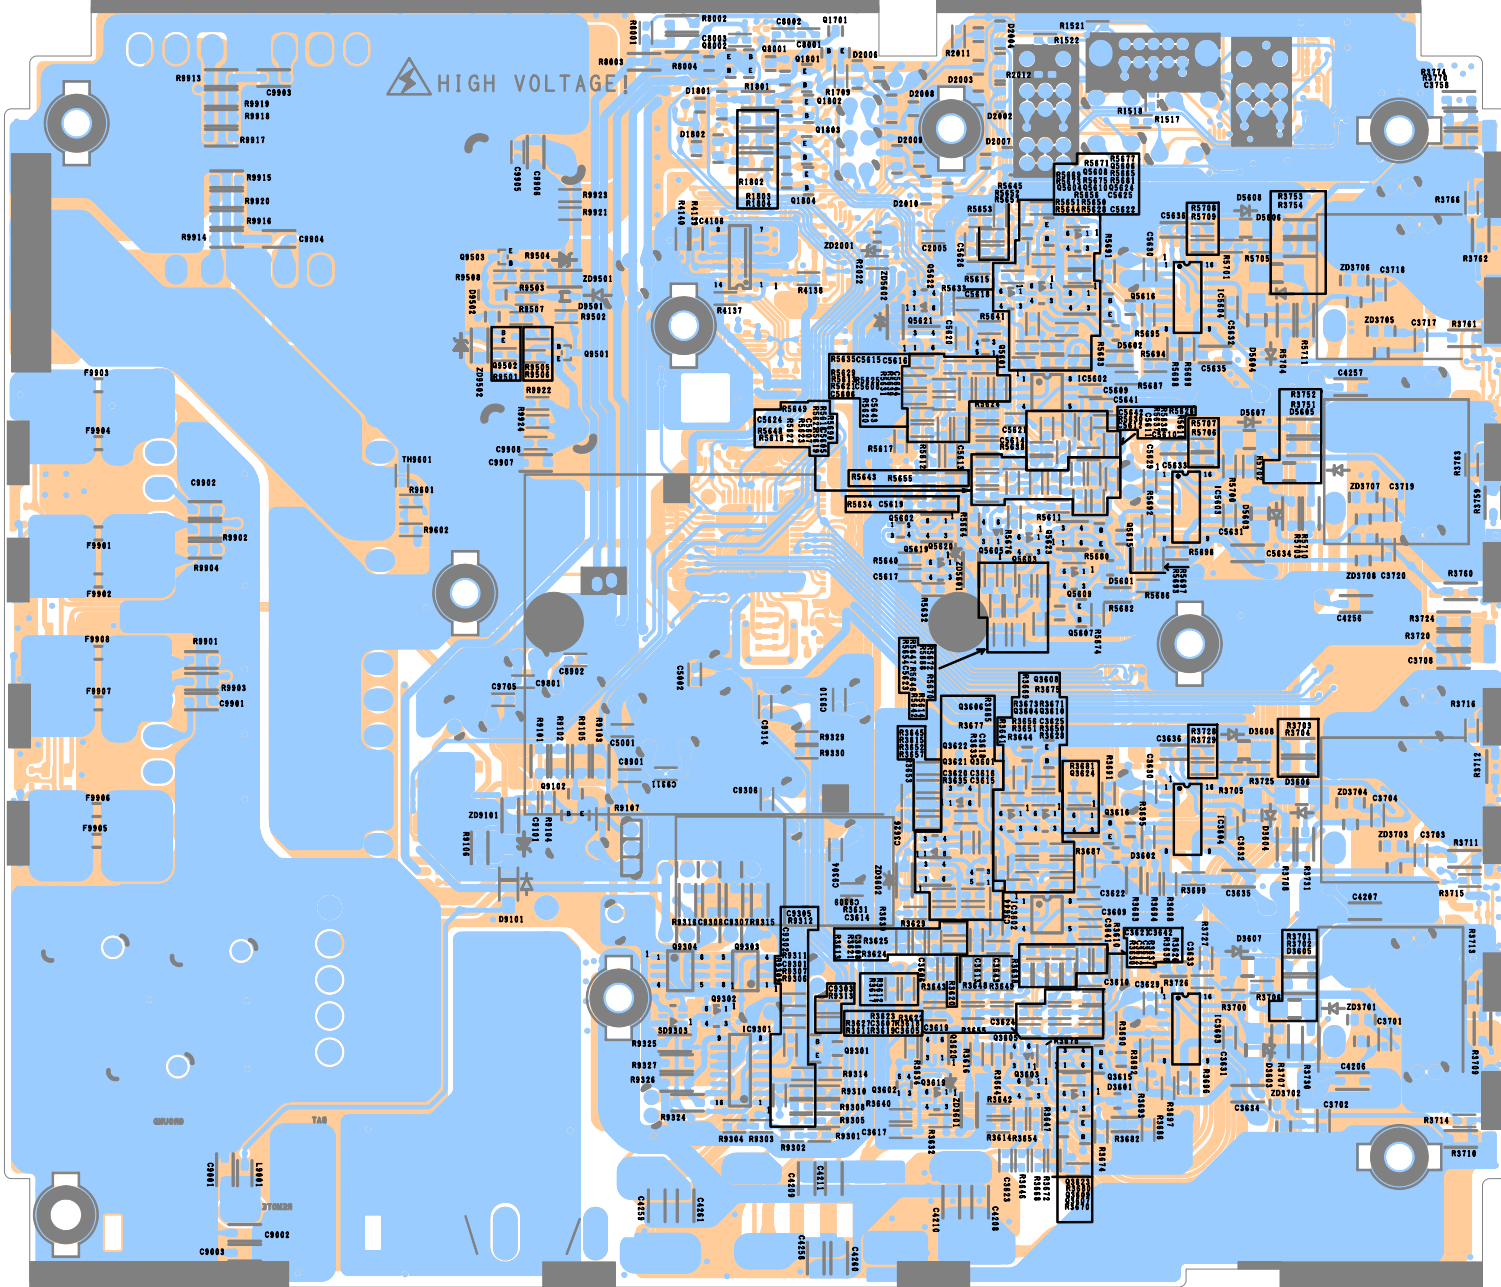


Orange Color Pattern:Component Side Pattern
Blue Color Pattern:Foil Side Pattern

The image shows a detailed PCB layout for a power management IC. The layout is divided into several sections, each containing various components and their connections. The components are labeled with their respective part numbers and values.

Top Section: This section contains a large capacitor (C1551) and an inductor (L1551). It also includes several resistors (R1551, R1552, R1553, R1554, R1555, R1556, R1557, R1558, R1559, R1560, R1561, R1562, R1563, R1564, R1565, R1566, R1567, R1568, R1569, R1570, R1571, R1572, R1573, R1574, R1575, R1576, R1577, R1578, R1579, R1580, R1581, R1582, R1583, R1584, R1585, R1586, R1587, R1588, R1589, R1590, R1591, R1592, R1593, R1594, R1595, R1596, R1597, R1598, R1599, R1600, R1601, R1602, R1603, R1604, R1605, R1606, R1607, R1608, R1609, R1610, R1611, R1612, R1613, R1614, R1615, R1616, R1617, R1618, R1619, R1620, R1621, R1622, R1623, R1624, R1625, R1626, R1627, R1628, R1629, R1630, R1631, R1632, R1633, R1634, R1635, R1636, R1637, R1638, R1639, R1640, R1641, R1642, R1643, R1644, R1645, R1646, R1647, R1648, R1649, R1650, R1651, R1652, R1653, R1654, R1655, R1656, R1657, R1658, R1659, R1660, R1661, R1662, R1663, R1664, R1665, R1666, R1667, R1668, R1669, R1670, R1671, R1672, R1673, R1674, R1675, R1676, R1677, R1678, R1679, R1680, R1681, R1682, R1683, R1684, R1685, R1686, R1687, R1688, R1689, R1690, R1691, R1692, R1693, R1694, R1695, R1696, R1697, R1698, R1699, R1700, R1701, R1702, R1703, R1704, R1705, R1706, R1707, R1708, R1709, R1710, R1711, R1712, R1713, R1714, R1715, R1716, R1717, R1718, R1719, R1720, R1721, R1722, R1723, R1724, R1725, R1726, R1727, R1728, R1729, R1730, R1731, R1732, R1733, R1734, R1735, R1736, R1737, R1738, R1739, R1740, R1741, R1742, R1743, R1744, R1745, R1746, R1747, R1748, R1749, R1750, R1751, R1752, R1753, R1754, R1755, R1756, R1757, R1758, R1759, R1760, R1761, R1762, R1763, R1764, R1765, R1766, R1767, R1768, R1769, R1770, R1771, R1772, R1773, R1774, R1775, R1776, R1777, R1778, R1779, R1780, R1781, R1782, R1783, R1784, R1785, R1786, R1787, R1788, R1789, R1790, R1791, R1792, R1793, R1794, R1795, R1796, R1797, R1798, R1799, R1800, R1801, R1802, R1803, R1804, R1805, R1806, R1807, R1808, R1809, R1810, R1811, R1812, R1813, R1814, R1815, R1816, R1817, R1818, R1819, R1820, R1821, R1822, R1823, R1824, R1825, R1826, R1827, R1828, R1829, R1830, R1831, R1832, R1833, R1834, R1835, R1836, R1837, R1838, R1839, R1840, R1841, R1842, R1843, R1844, R1845, R1846, R1847, R1848, R1849, R1850, R1851, R1852, R1853, R1854, R1855, R1856, R1857, R1858, R1859, R1860, R1861, R1862, R1863, R1864, R1865, R1866, R1867, R1868, R1869, R1870, R1871, R1872, R1873, R1874, R1875, R1876, R1877, R1878, R1879, R1880, R1881, R1882, R1883, R1884, R1885, R1886, R1887, R1888, R1889, R1890, R1891, R1892, R1893, R1894, R1895, R1896, R1897, R1898, R1899, R1900, R1901, R1902, R1903, R1904, R1905, R1906, R1907, R1908, R1909, R1910, R1911, R1912, R1913, R1914, R1915, R1916, R1917, R1918, R1919, R1920, R1921, R1922, R1923, R1924, R1925, R1926, R1927, R1928, R1929, R1930, R1931, R1932, R1933, R1934, R1935, R1936, R1937, R1938, R1939, R1940, R1941, R1942, R1943, R1944, R1945, R1946, R1947, R1948, R1949, R1950, R1951, R1952, R1953, R1954, R1955, R1956, R1957, R1958, R1959, R1960, R1961, R1962, R1963, R1964, R1965, R1966, R1967, R1968, R1969, R1970, R1971, R1972, R1973, R1974, R1975, R1976, R1977, R1978, R1979, R1980, R1981, R1982, R1983, R1984, R1985, R1986, R1987, R1988, R1989, R1990, R1991, R1992, R1993, R1994, R1995, R1996, R1997, R1998, R1999, R2000, R2001, R2002, R2003, R2004, R2005, R2006, R2007, R2008, R2009, R2010, R2011, R2012, R2013, R2014, R2015, R2016, R2017, R2018, R2019, R2020, R2021, R2022, R2023, R2024, R2025, R2026, R2027, R2028, R2029, R2030, R2031, R2032, R2033, R2034, R2035, R2036, R2037, R2038, R2039, R2040, R2041, R2042, R2043, R2044, R2045, R2046, R2047, R2048, R2049, R2050, R2051, R2052, R2053, R2054, R2055, R2056, R2057, R2058, R2059, R2060, R2061, R2062, R2063, R2064, R2065, R2066, R2067, R2068, R2069, R2070, R2071, R2072, R2073, R2074, R2075, R2076, R2077, R2078, R2079, R2080, R2081, R2082, R2083, R2084, R2085, R2086, R2087, R2088, R2089, R2090, R2091, R2092, R2093, R2094, R2095, R2096, R2097, R2098, R2099, R2100, R2101, R2102, R2103, R2104, R2105, R2106, R2107, R2108, R2109, R2110, R2111, R2112, R2113, R2114, R2115, R2116, R2117, R2118, R2119, R2120, R2121, R2122, R2123, R2124, R2125, R2126, R2127, R2128, R2129, R2130, R2131, R2132, R2133, R2134, R2135, R2136, R2137, R2138, R2139, R2140, R2141, R2142, R2143, R2144, R2145, R2146, R2147, R2148, R2149, R2150, R2151, R2152, R2153, R2154, R2155, R2156, R2157, R2158, R2159, R2160, R2161, R2162, R2163, R2164, R2165, R2166, R2167, R2168, R2169, R2170, R2171, R2172, R2173, R2174, R2175, R2176, R2177, R2178, R2179, R2180, R2181, R2182, R2183, R2184, R2185, R2186, R2187, R2188, R2189, R2190, R2191, R2192, R2193, R2194, R2195, R2196, R2197, R2198, R2199, R2200


Orange Color Pattern:Component Side Pattern

SUB-P.W.Board

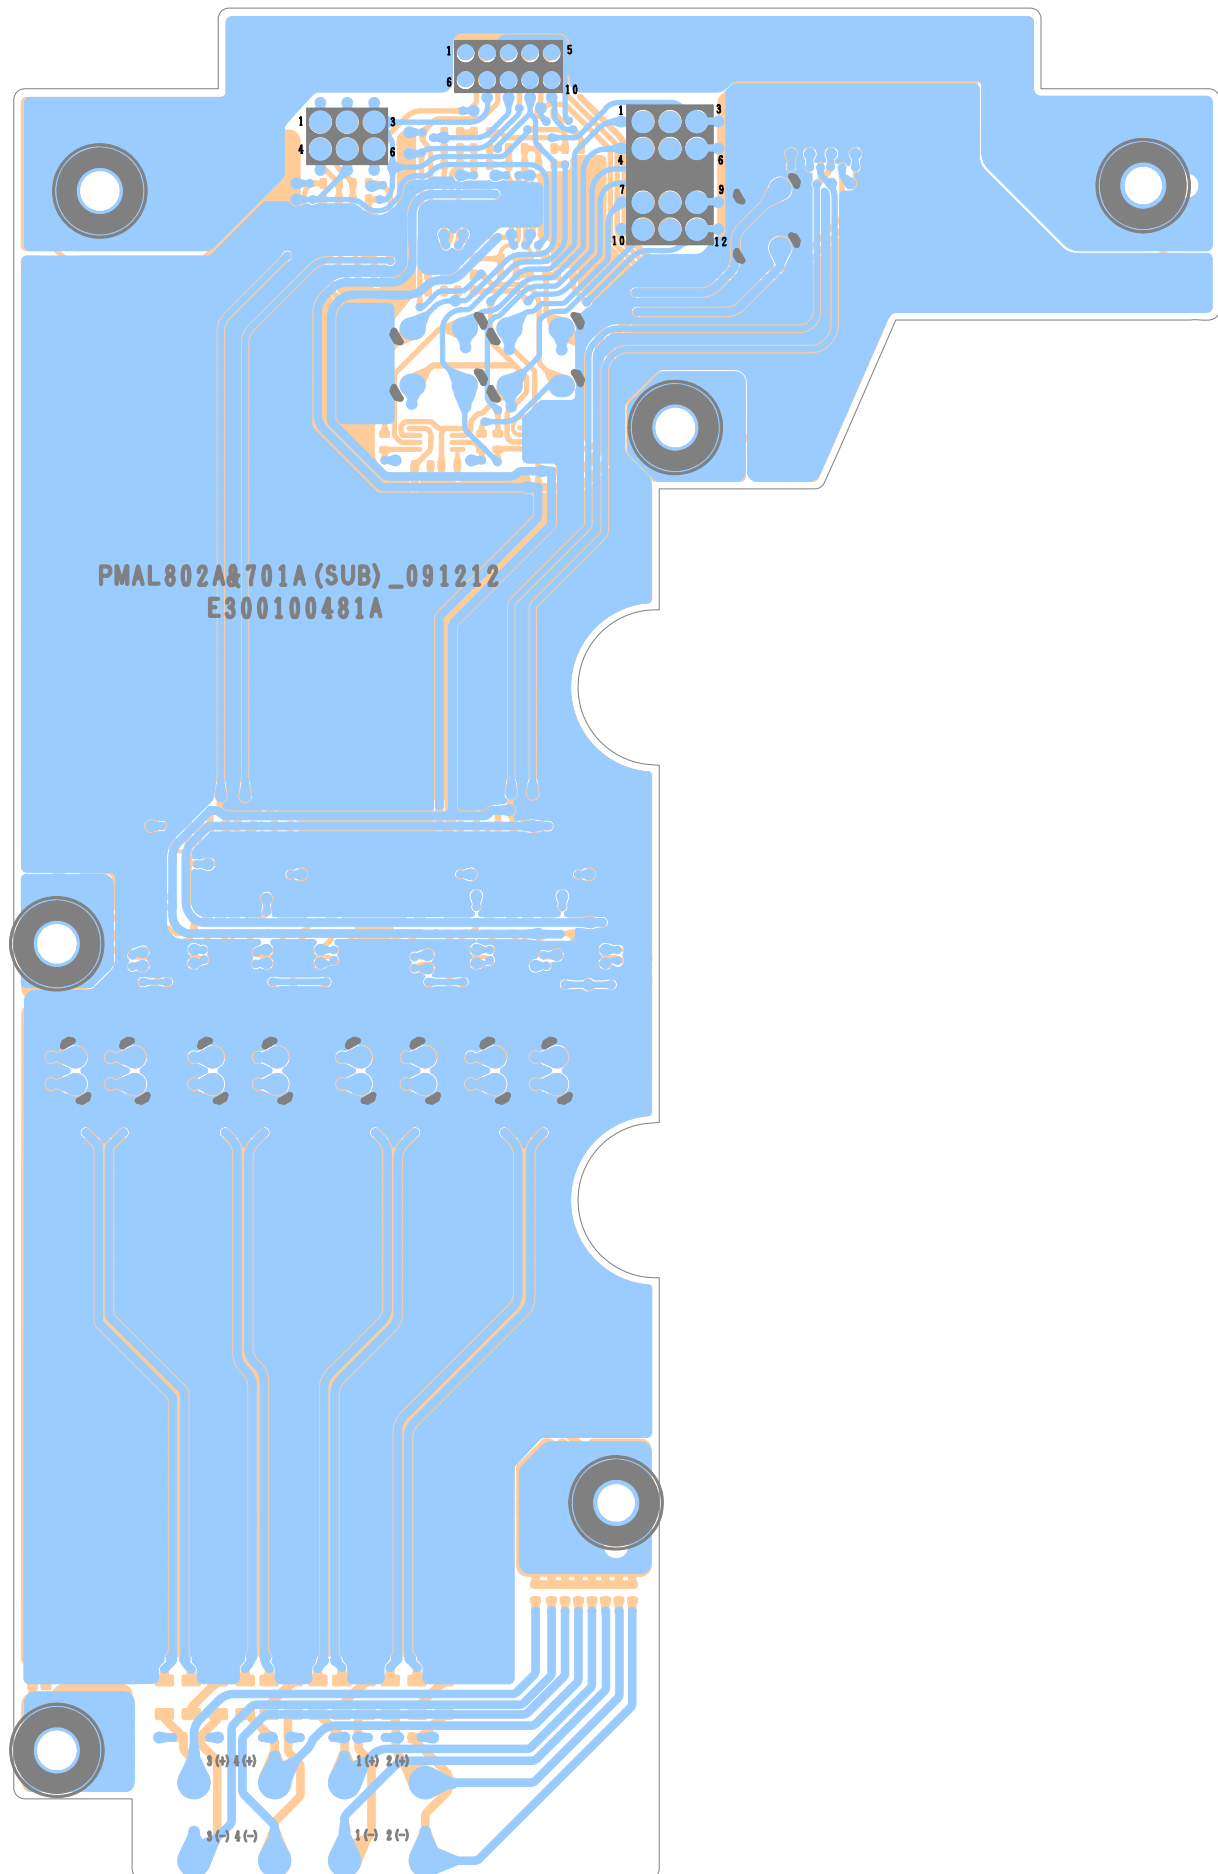


Orange Color Pattern:Component Side Pattern

LED-P.W.Board

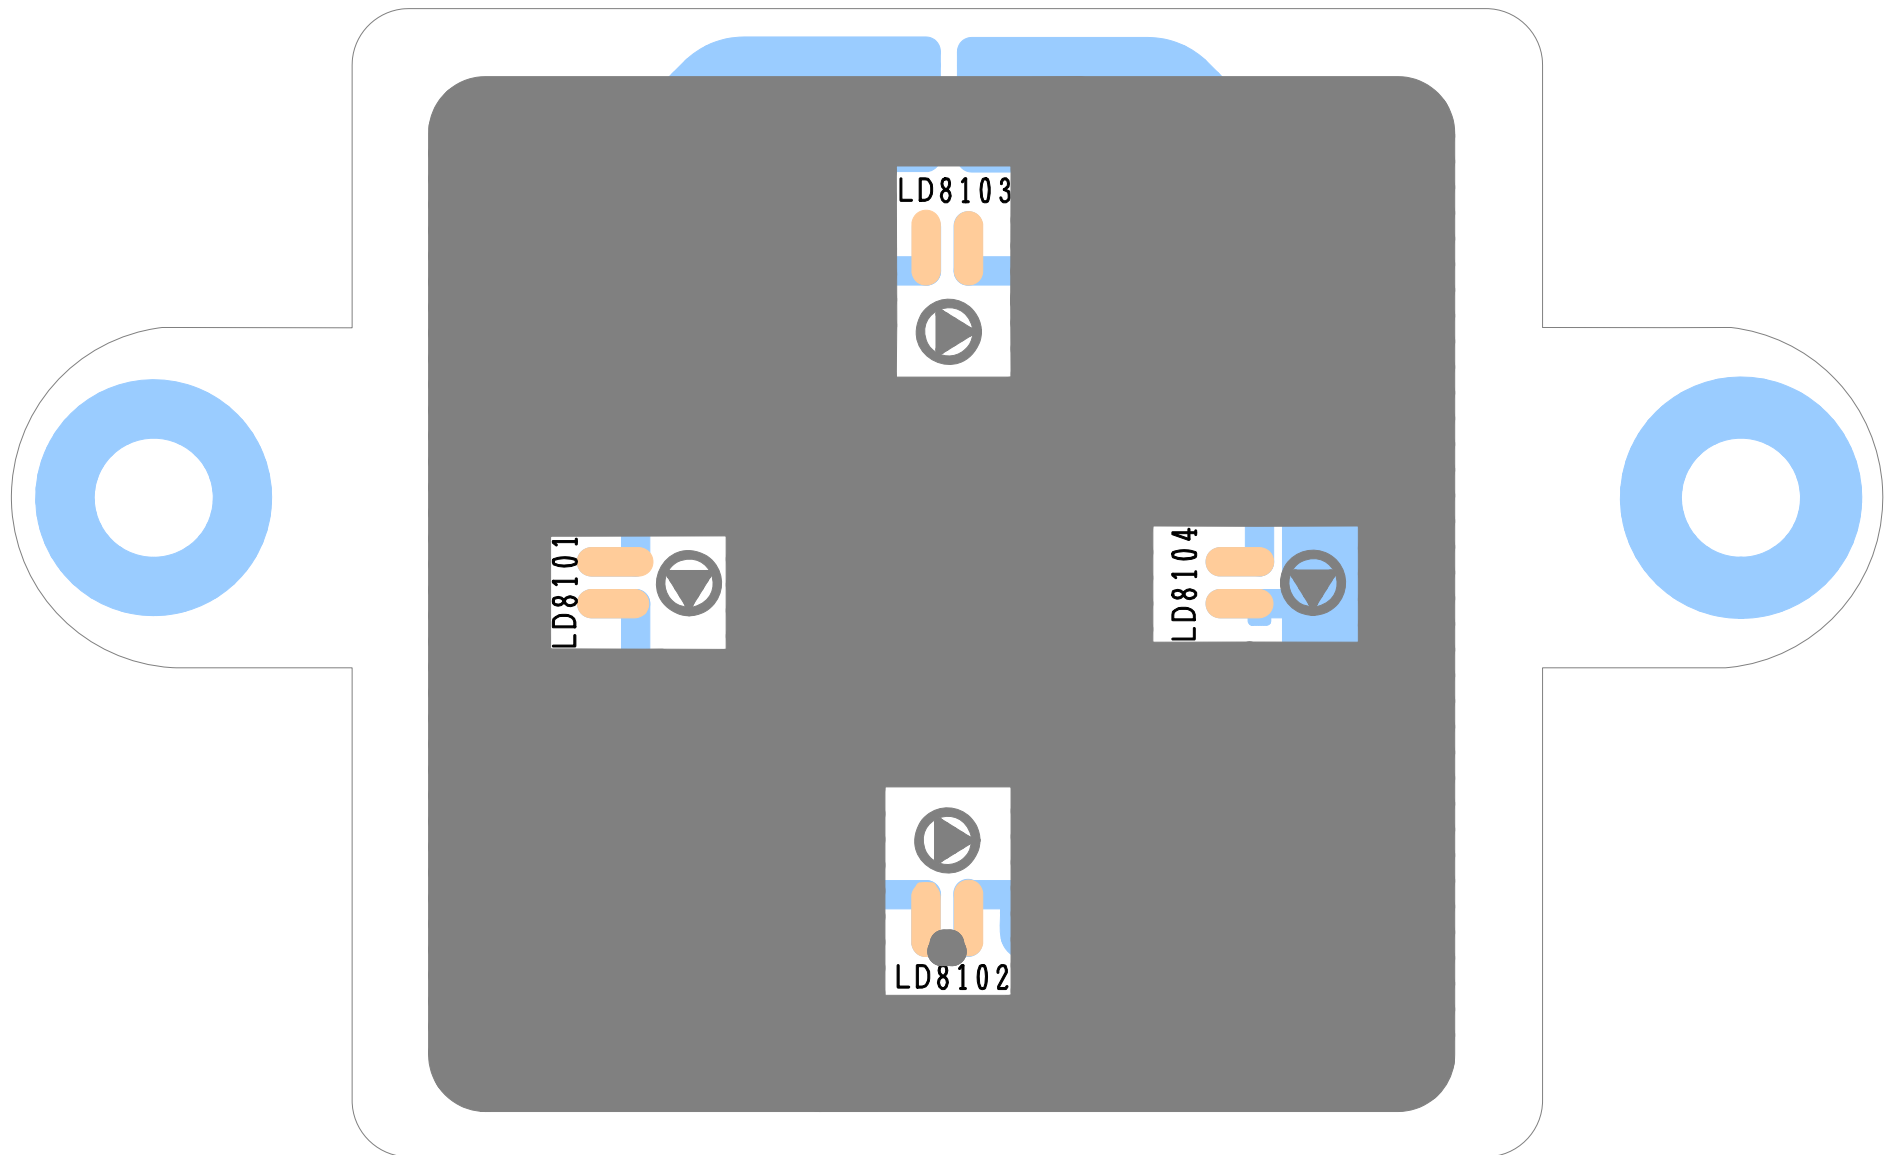

Orange Color Pattern:Component Side Pattern
Blue Color Pattern:Foil Side Pattern

LED-P.W.Board

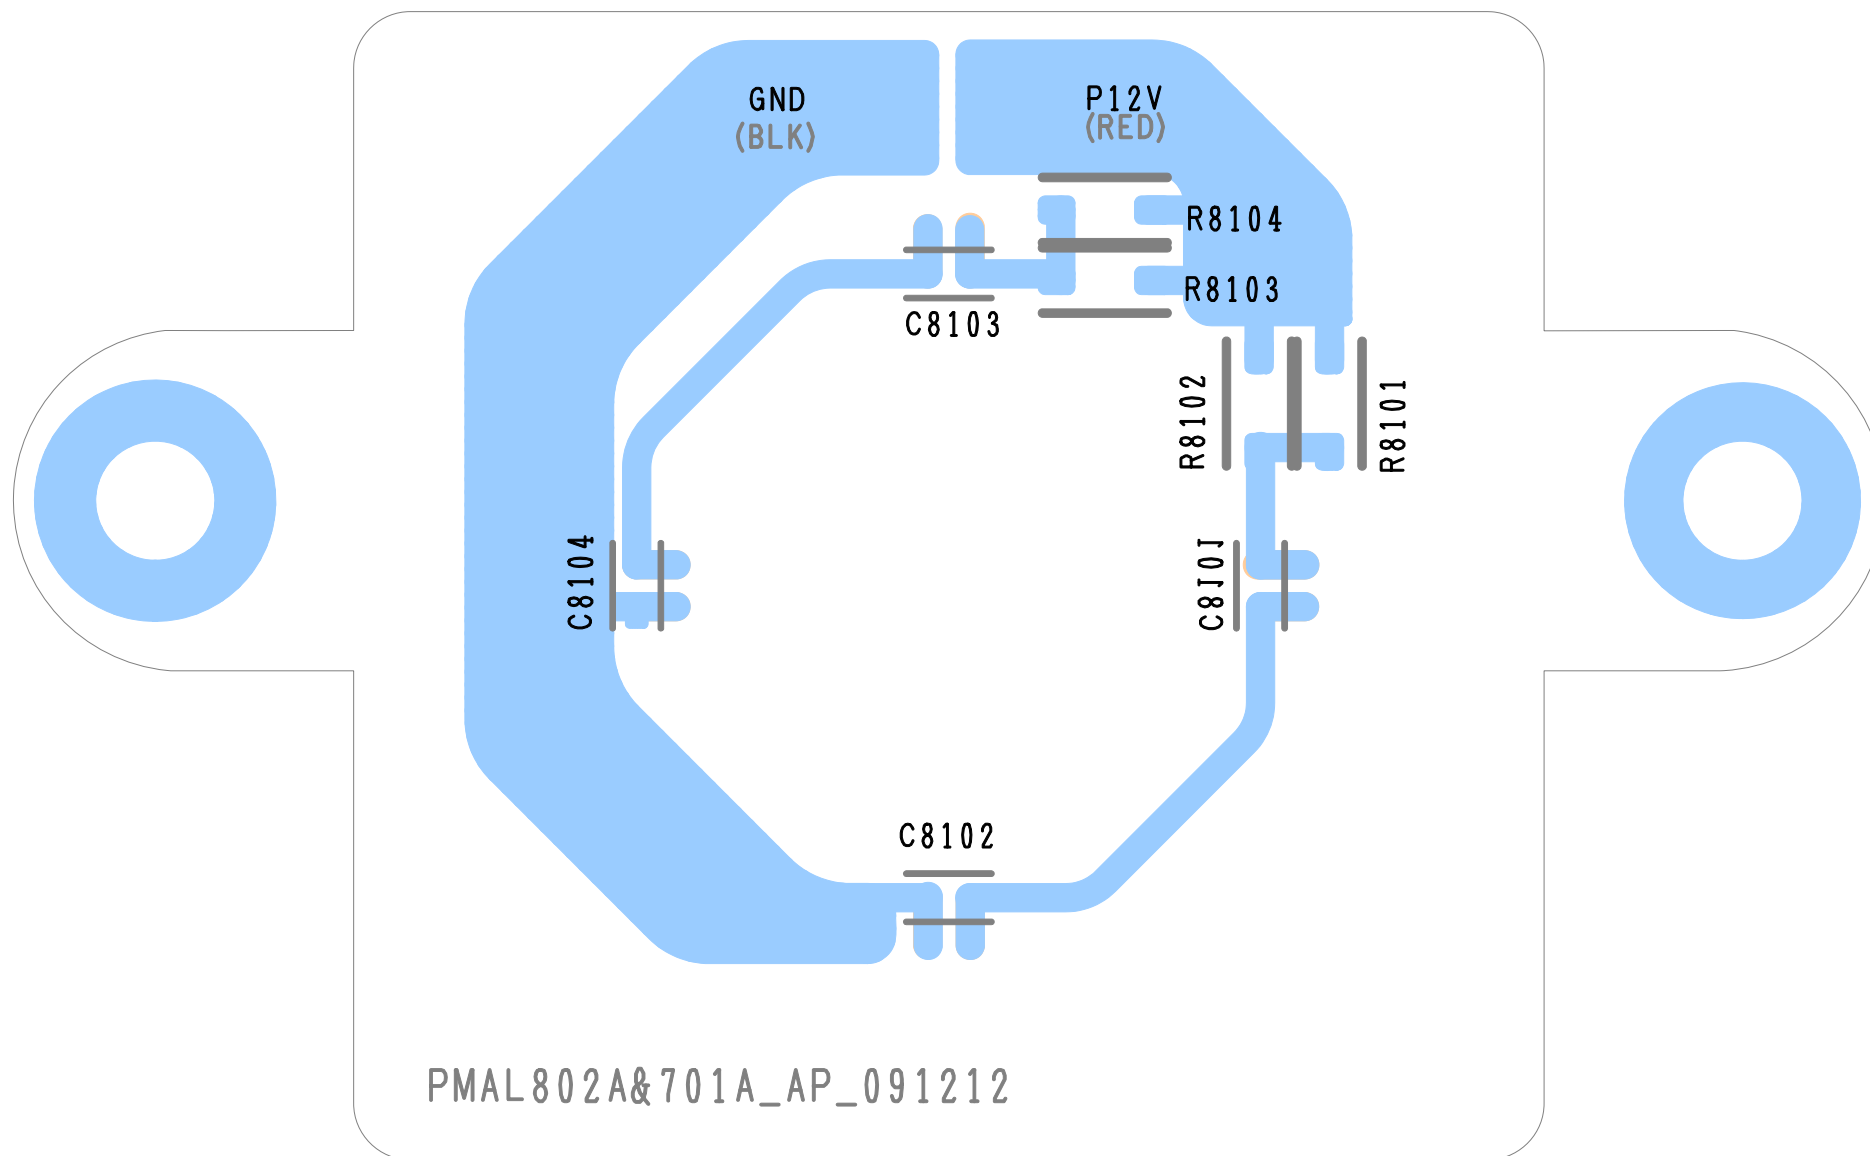

Orange Color Pattern:Component Side Pattern
Blue Color Pattern:Foil Side Pattern

Terminal Voltage of IC/TR

1) IC [Unit : V]

IC1101 (BA4580)		IC1102 (BA4580)		IC1103 (BA4580)		IC1104 (BA4580)		IC1201 (BA4580)	
1	0.06	1	0.06	1	0.06	1	0.06	1	0.05
2	0.07	2	0.07	2	0.07	2	0.07	2	0.06
3	0.06	3	0.06	3	0.06	3	0.06	3	0.06
4	-15.02	4	-15.02	4	-15.02	4	-15.02	4	-15.02
5	0.06	5	0.06	5	0.06	5	0.06	5	0.06
6	0.07	6	0.07	6	0.07	6	0.07	6	0.06
7	0.07	7	0.07	7	0.07	7	0.07	7	0.05
8	14.94	8	14.94	8	14.94	8	14.94	8	14.93

IC1202 (BA4580)		IC1401 (BA4580)		IC1451 (BA4580)		IC1501 (BA4580)		IC1502 (BA4580)	
1	0.05	1	0.04	1	0.04	1	0.04	1	0.04
2	0.06	2	0.04	2	0.04	2	0.04	2	0.04
3	0.06	3	0.04	3	0.04	3	0.04	3	0.04
4	-15.02	4	-15.02	4	-15.02	4	-15.03	4	-15.03
5	0.06	5	0.04	5	0.04	5	0.04	5	0.04
6	0.06	6	0.04	6	0.04	6	0.04	6	0.04
7	0.05	7	0.05	7	0.05	7	0.04	7	0.04
8	14.93	8	14.93	8	14.93	8	14.93	8	14.93

IC1503 (BA4580)		IC1504 (BA4580)		IC1551 (BA4580)		IC1552 (BA4580)		IC1553 (BA4580)	
1	0.04	1	0.04	1	0.04	1	0.04	1	0.04
2	0.04	2	0.04	2	0.04	2	0.04	2	0.04
3	0.04	3	0.04	3	0.04	3	0.04	3	0.04
4	-15.03	4	-15.03	4	-15.03	4	-15.03	4	-15.03
5	0.04	5	0.04	5	0.04	5	0.04	5	0.04
6	0.04	6	0.04	6	0.04	6	0.04	6	0.04
7	0.04	7	0.05	7	0.04	7	0.04	7	0.04
8	14.93	8	14.92	8	14.93	8	14.93	8	14.93

IC1554 (BA4580)		IC2001 (BA4580)		IC2002 (BA4580)		IC2003 (BA4580)		IC3601 (BA4580)	
1	0.04	1	-3.70	1	-2.25	1	-2.26	1	0.04
2	0.04	2	0.04	2	0.03	2	0.02	2	0.04
3	0.04	3	0.04	3	0.04	3	0.04	3	0.04
4	-15.03	4	-15.04	4	-15.03	4	-15.04	4	-15.05
5	0.04	5	4.47	5	2.24	5	2.26	5	0.04
6	0.04	6	4.47	6	2.24	6	2.26	6	0.04
7	0.05	7	3.69	7	2.24	7	2.26	7	0.04
8	14.92	8	14.92	8	14.93	8	14.94	8	14.94

IC3602 (SE5532)		IC3603 (IRS20956S)				IC3604 (IRS20956S)			
1	0.00	1	10.16	9	-41.60	1	10.16	9	-41.60
2	0.02	2	9.82	10	-37.20	2	9.82	10	-37.20
3	0.02	3	0.03	11	-30.00	3	0.03	11	-30.00
4	-15.07	4	NC	12	-39.70	4	NC	12	-39.70
5	0.02	5	-39.80	13	-0.50	5	-39.80	13	-0.50
6	0.02	6	-36.70	14	1.50	6	-36.70	14	1.50
7	0.00	7	-40.90	15	5.30	7	-40.90	15	5.30
8	14.92	8	-36.90	16	0.00	8	-36.90	16	0.00

IC3607 (KIC7S00FU)		IC3608 (KIC7S00FU)		IC4101 (BA2901FV)			
1	4.99	1	4.99	1	5.11	8	-47.00
2	0.01	2	0.01	2	5.11	9	-46.90
3	0.01	3	0.01	3	-35.10	10	-47.00
4	4.99	4	4.99	4	-47.00	11	-46.90
5	4.99	5	4.99	5	-46.90	12	-47.00
				6	-47.00	13	5.37
				7	-46.90	14	5.37

IC4106 (74VHC00)				IC4107 (74VHC74)			
1	5.01	8	5.02	1	5.02	8	5.03
2	5.01	9	0.02	2	5.02	9	0.03
3	0.02	10	0.02	3	0.03	10	5.02
4	0.02	11	0.02	4	5.02	11	0.03
5	0.02	12	5.01	5	5.02	12	5.02
6	5.01	13	5.01	6	0.03	13	5.02
7	0.20	14	5.02	7	5.02	14	5.03

IC5001 (NJL17222LE)		IC5002 (BD5243G)		IC5003 (BD5240G)	
1	0.00	1	4.99	1	4.99
2	11.30	2	8.06	2	4.46
3	4.99	3	0.01	3	0.01
		4	NC	4	NC
		5	3.97	5	2.21

IC5004 (TMP87C847UG)							
1	5.04	12	5.04	23	1.24	34	0.14
2	5.04	13	0.05	24	1.20	35	5.06
3	5.04	14	5.06	25	1.07	36	5.11
4	5.04	15	1.74	26	1.09	37	5.11
5	5.04	16	2.18	27	NC	38	5.10
6	5.04	17	0.07	28	0.16	39	5.09
7	5.04	18	5.07	29	5.02	40	5.11
8	5.04	19	3.82	30	5.02	41	5.00
9	5.04	20	3.98	31	5.02	42	5.14
10	5.04	21	4.42	32	0.08	43	5.13
11	5.04	22	3.06	33	4.94	44	5.19

IC5005 (KIC7SH04FU)		IC5006 (KIC7S32FU)		IC5601 (BA4580)		IC5602 (SE5532)	
1	NC	1	0.00	1	0.04	1	0.01
2	5.00	2	4.98	2	0.04	2	0.02
3	0.01	3	5.00	3	0.04	3	0.02
4	0.01	4	5.00	4	-15.05	4	-15.07
5	5.00	5	4.95	5	0.04	5	0.02
				6	0.04	6	0.02
				7	0.04	7	0.00
				8	14.94	8	14.92

IC5603 (IRS20956S)				IC5604 (IRS20956S)			
1	10.16	9	-41.60	1	10.16	9	-41.60
2	9.82	10	-37.20	2	9.82	10	-37.20
3	0.03	11	-30.00	3	0.03	11	-30.00
4	NC	12	-39.70	4	NC	12	-39.70
5	-39.80	13	-0.50	5	-39.80	13	-0.50
6	-36.70	14	1.50	6	-36.70	14	1.50
7	-40.90	15	5.30	7	-40.90	15	5.30
8	-36.90	16	0.00	8	-36.90	16	0.00

IC5607 (KIC7S00FU)		IC5608 (KIC7S00FU)		IC8901 (BA12CC0EP)	
1	4.99	1	4.99	1	14.33
2	0.01	2	0.01	2	0.01
3	0.01	3	0.01	3	12.02
4	4.99	4	4.99		
5	4.99	5	4.99		

IC9301 (NCV494BD)							
1	1.28	5	1.54	9	2.49	13	5.00
2	1.28	6	3.40	10	2.49	14	5.00
3	2.30	7	0.04	11	12.04	15	5.00
4	0.00	8	12.04	12	12.04	16	0.04

IC9302 (BA12CC0EP)	
1	-25.20
2	-42.20
3	-30.26

IC9303 (NJM78M15)	
1	18.21
2	0.01
3	14.92

IC9304 (NJM79M15)	
1	0.01
2	-18.27
3	-15.07

IC9702 (NCV494BD)							
1	1.14	5	1.54	9	4.87	13	4.97
2	1.40	6	3.40	10	4.87	14	4.97
3	0.05	7	0.01	11	12.01	15	4.97
4	0.00	8	12.01	12	12.01	16	0.01

IC9801 (MC33152)	
1	NC
2	4.87
3	0.01
4	4.87
5	5.44
6	12.01
7	5.44
8	NC

[Measuring Conditions]

1. Power Supply Voltage : DC 14.4V
2. Measuring Meter : Digital Multi Voltmeter
3. Measuring Point Reference : Between GND
4. Measuring Condition : No Signal Input

Terminal Voltage of IC/TR

2] FET & TR [Unit : V]

FET	G	D	S
Q3709	2.33	42.00	0.50
Q3710	-39.00	0.50	-42.00
Q3711	-39.00	0.50	-42.00
Q3712	2.33	42.00	0.50
Q3759	2.33	42.00	0.50
Q3760	-39.00	0.50	-42.00

FET	G	D	S
Q3761	-39.00	0.50	-42.00
Q3762	2.33	42.00	0.50
Q9901	5.43	14.25	0.01
Q9902	5.43	14.25	0.01
Q9903	5.43	14.25	0.01
Q9904	5.43	14.25	0.01

FET	1	2	3	4	5	6	7	8
Q9303	0.01	0.01	0.01	2.21	14.04	14.04	14.04	14.04
Q9304	0.01	0.01	0.01	2.21	14.04	14.04	14.04	14.04

TR	E	B	C
Q1701	0.00	-0.61	0.00
Q1702	0.00	-0.61	0.00
Q1703	0.00	-0.61	0.00
Q1704	0.00	-0.61	0.00
Q1705	14.78	14.75	-15.00
Q1706	0.00	0.00	14.75
Q1707	0.00	4.95	0.00
Q1801	0.00	-0.61	0.00
Q1802	0.00	-0.61	0.00
Q1803	0.00	-0.61	0.00
Q1804	0.00	-0.61	0.00
Q1805	14.78	14.75	-15.00
Q1806	0.00	0.00	14.75
Q1807	0.00	7.61	0.00
Q2001	0.00	0.00	4.70
Q2002	0.00	0.00	2.85
Q2003	0.00	0.00	4.72
Q2004	0.00	0.00	2.85
Q3607	-30.20	-30.70	-31.60
Q3608	-30.20	-30.70	-31.60
Q3611	4.98	4.98	0.00
Q3612	4.98	4.98	0.00
Q3613	0.00	0.00	9.81
Q3614	0.00	0.00	9.81
Q3615	-42.20	-41.70	-40.00
Q3616	-42.20	-41.70	-40.00
Q3617	4.98	9.81	0.00
Q3618	4.98	9.81	0.00

TR	E	B	C
Q4109	4.98	4.98	0.00
Q4110	4.98	4.98	0.00
Q4111	4.98	4.98	0.00
Q4112	4.98	4.98	0.00
Q5001	0.00	0.00	4.98
Q5002	0.00	0.00	4.98
Q5607	-30.20	-30.70	-31.60
Q5608	-30.20	-30.70	-31.60
Q5611	4.98	4.98	0.00
Q5612	4.98	4.98	0.00
Q5613	0.00	0.00	9.81
Q5614	0.00	0.00	9.81
Q5615	-42.20	-41.70	-40.00
Q5616	-42.20	-41.70	-40.00
Q5617	4.98	9.81	0.00
Q5618	4.98	9.81	0.00
Q8001	0.00	4.88	0.03
Q8002	0.00	0.00	10.65
Q9101	14.37	13.59	14.33
Q9102	0.00	0.73	0.18
Q9301	4.97	4.87	0.00
Q9501	-42.00	-41.50	-42.00
Q9502	0.00	0.20	5.01
Q9503	0.00	0.67	0.00
Q9708	4.99	4.87	0.00

TR	1	2	3	4	5
Q3601	0.00	0.00	0.00	14.80	-15.20
Q3602	0.00	0.00	0.00	14.80	-15.20
Q5601	0.00	0.00	0.00	14.80	-15.20
Q5602	0.00	0.00	0.00	14.80	-15.20

TR	1	2	3	4	5	6
Q3603	-30.64	0.59	-30.00	0.00	0.00	0.59
Q3604	-30.64	0.59	-30.00	0.00	0.00	0.59
Q3605	13.58	14.18	0.57	13.58	14.18	14.80
Q3606	13.58	14.18	0.57	13.58	14.18	14.80
Q3609	-41.60	-30.75	-41.40	-30.80	-30.80	-30.80
Q3610	-41.60	-30.75	-41.40	-30.80	-30.80	-30.80
Q3619	0.30	14.80	14.80	14.80	14.80	14.80
Q3620	0.00	-15.20	-15.20	-15.20	-15.20	-15.20


Q3621	0.00	-15.20	-15.20	-15.20	-15.20	-15.20
Q3622	0.30	14.80	14.80	14.80	14.80	14.80
Q3623	-41.60	-41.60	-41.60	-41.60	-42.00	-42.00
Q3624	-41.60	-41.60	-41.60	-41.60	-42.00	-42.00
Q5603	-30.64	0.59	-30.00	0.00	0.00	0.59
Q5604	-30.64	0.59	-30.00	0.00	0.00	0.59
Q5605	13.58	14.18	0.57	13.58	14.18	14.80
Q5606	13.58	14.18	0.57	13.58	14.18	14.80
Q5609	-41.60	-30.75	-41.40	-30.80	-30.80	-30.80
Q5610	-41.60	-30.75	-41.40	-30.80	-30.80	-30.80
Q5619	0.30	14.80	14.80	14.80	14.80	14.80
Q5620	0.00	-15.20	-15.20	-15.20	-15.20	-15.20
Q5621	0.00	-15.20	-15.20	-15.20	-15.20	-15.20
Q5622	0.30	14.80	14.80	14.80	14.80	14.80
Q5623	-41.60	-41.60	-41.60	-41.60	-42.00	-42.00
Q5624	-41.60	-41.60	-41.60	-41.60	-42.00	-42.00
Q9302	0.34	4.91	4.79	0.25	4.96	4.78

[Measuring Conditions]

1. Power Supply Voltage : DC 14.4V
2. Measuring Meter : Digital Multi Voltmeter
3. Measuring Point Reference : Between GND
4. Measuring Condition : No Signal Input

Exploded View (Cabinet)

NOTE : ※ General Foreign Model, Chinese Model Only.

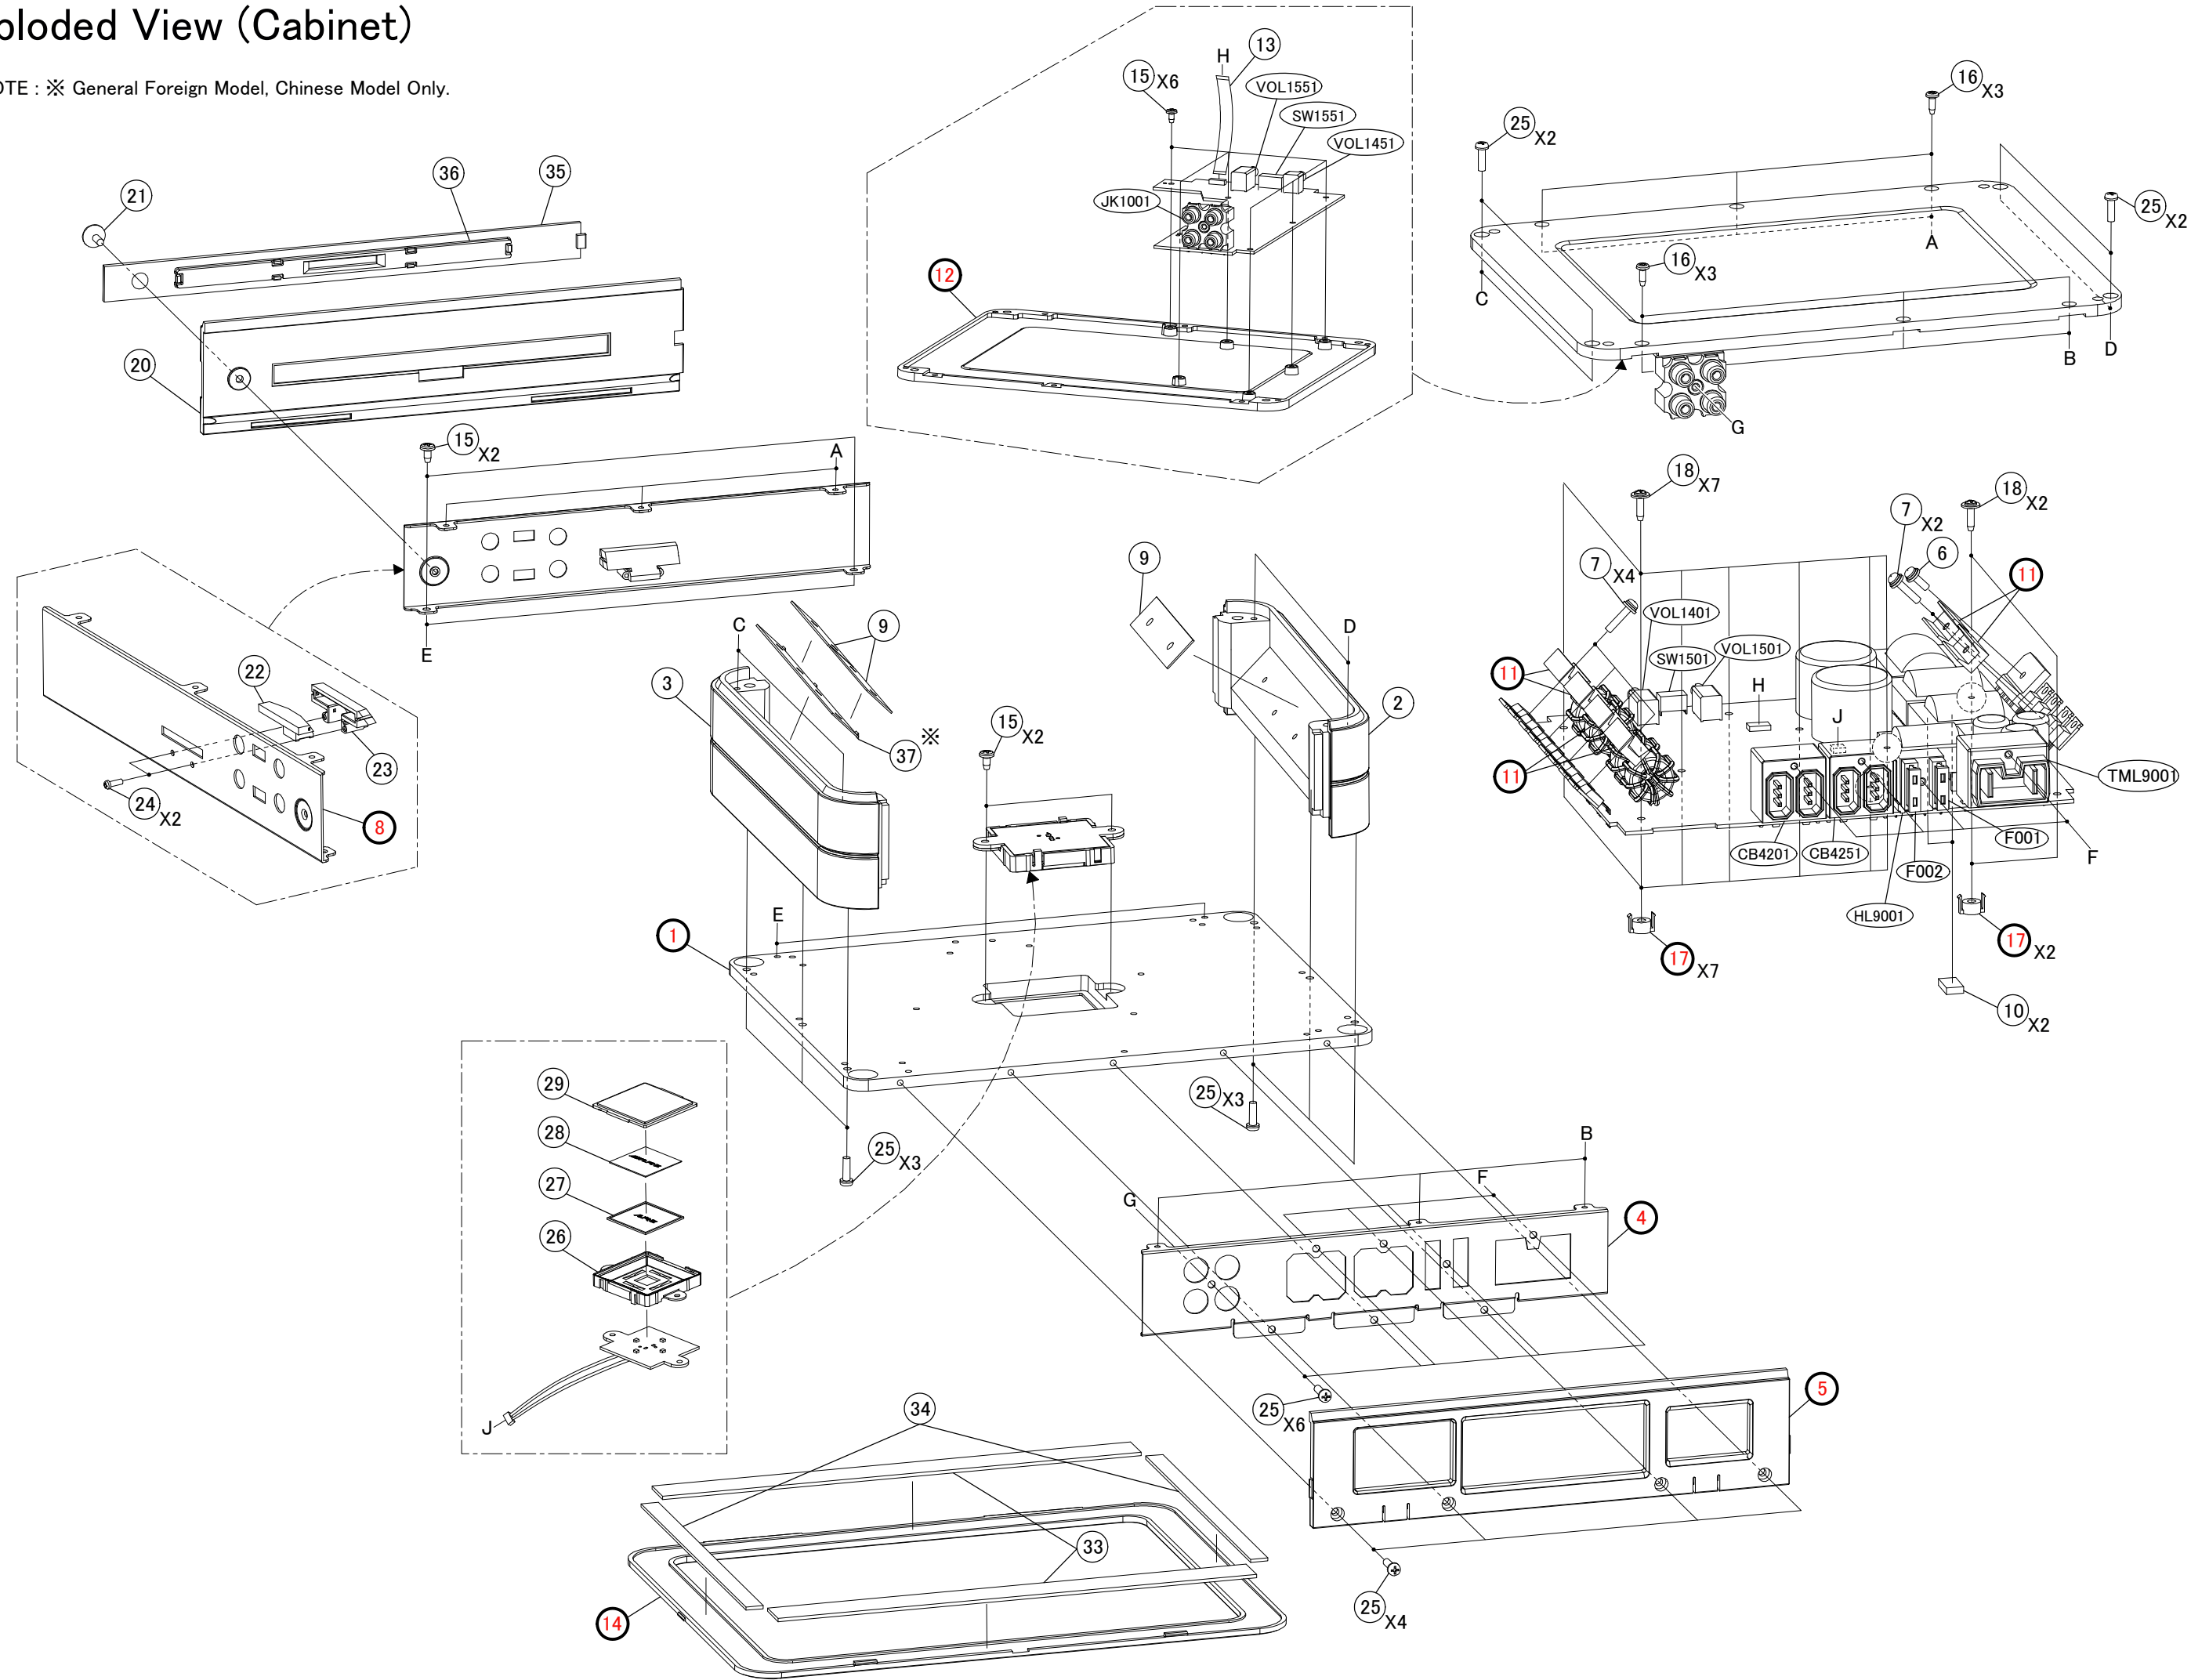

MAIN-P.W.Board			C1401	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C1402	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C1403	08E35408S01	CAP,CER. 10pF/50V
MAIN-P.W.Board			C1404	08E35408S01	CAP,CER. 10pF/50V
MAIN-P.W.Board		#1	C1406	08E41032S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board		\$1	C1406	08E41032S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board		%1	C1406	06E36464S01	RES,CF.0-1/16W
MAIN-P.W.Board		&1	C1406	06E36464S01	RES,CF.0-1/16W
MAIN-P.W.Board		#1	C1408	08E41032S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board		\$1	C1408	08E41032S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board		%1	C1408	08E41031S01	CAP,CER.0.01uF/50V
MAIN-P.W.Board		&1	C1408	08E41031S01	CAP,CER.0.01uF/50V
MAIN-P.W.Board		#1	C1409	08E41032S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board		\$1	C1409	08E41032S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board		%1	C1409	08E41031S01	CAP,CER.0.01uF/50V
MAIN-P.W.Board		&1	C1409	08E41031S01	CAP,CER.0.01uF/50V
MAIN-P.W.Board		#1	C1413	08E41032S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board		\$1	C1413	08E41032S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board		%1	C1413	06E36464S01	RES,CF.0-1/16W
MAIN-P.W.Board		&1	C1413	06E36464S01	RES,CF.0-1/16W
MAIN-P.W.Board			C1501	08E35460S01	CAP,CER. 12pF/50V
MAIN-P.W.Board			C1502	08E35460S01	CAP,CER. 12pF/50V
MAIN-P.W.Board			C1503	08E37267S01	CAP,CER. 0.047uF/25V
MAIN-P.W.Board			C1504	08E37267S01	CAP,CER. 0.047uF/25V
MAIN-P.W.Board			C1505	08E35460S01	CAP,CER. 12pF/50V
MAIN-P.W.Board			C1506	08E35460S01	CAP,CER. 12pF/50V
MAIN-P.W.Board			C1507	08E38721S01	CAP,FILM 0.22uF/50V
MAIN-P.W.Board			C1508	08E38721S01	CAP,FILM 0.22uF/50V
MAIN-P.W.Board			C1509	08E37267S01	CAP,CER. 0.047uF/25V
MAIN-P.W.Board			C1510	08E37267S01	CAP,CER. 0.047uF/25V
MAIN-P.W.Board			C1511	08E38721S01	CAP,FILM 0.22uF/50V
MAIN-P.W.Board			C1512	08E38721S01	CAP,FILM 0.22uF/50V
MAIN-P.W.Board			C2001	08E37267S01	CAP,CER. 0.047uF/25V
MAIN-P.W.Board			C2002	08E38421S01	CAP,CER. 22pF/50V
MAIN-P.W.Board			C2003	08E38421S01	CAP,CER. 22pF/50V
MAIN-P.W.Board			C2004	08E37267S01	CAP,CER. 0.047uF/25V
MAIN-P.W.Board			C2005	08E41031S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C2006	08E37267S01	CAP,CER. 0.047uF/25V
MAIN-P.W.Board			C2007	08E37267S01	CAP,CER. 0.047uF/25V
MAIN-P.W.Board			C2008	08E37267S01	CAP,CER. 0.047uF/25V
MAIN-P.W.Board			C2009	08E37267S01	CAP,CER. 0.047uF/25V
MAIN-P.W.Board			C2010	08E38421S01	CAP,CER. 22pF/50V
MAIN-P.W.Board			C3601	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C3602	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C3603	08E37268S01	CAP,CER. 120pF/50V
MAIN-P.W.Board			C3604	08E37268S01	CAP,CER. 120pF/50V
MAIN-P.W.Board			C3605	08E38046S01	CAP,CER. 820pF/50V
MAIN-P.W.Board			C3606	08E38046S01	CAP,CER. 820pF/50V
MAIN-P.W.Board			C3607	08E36471S01	CAP,CER. 470pF/50V
MAIN-P.W.Board			C3608	08E36471S01	CAP,CER. 470pF/50V
MAIN-P.W.Board			C3609	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C3610	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C3611	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C3612	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C3613	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C3614	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C3615	08E41492S01	CAP,CER.2700pF/50V

MAIN-P.W.Board		C3616	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board		C3617	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board		C3618	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board		C3619	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board		C3620	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board		C3621	08E37267S01	CAP,CER. 0.047uF/25V
MAIN-P.W.Board		C3622	08E37267S01	CAP,CER. 0.047uF/25V
MAIN-P.W.Board		C3623	08E38036S01	CAP,CER. 330pF/50V
MAIN-P.W.Board		C3624	08E38036S01	CAP,CER. 330pF/50V
MAIN-P.W.Board		C3625	08E38036S01	CAP,CER. 330pF/50V
MAIN-P.W.Board		C3626	08E38036S01	CAP,CER. 330pF/50V
MAIN-P.W.Board		C3627	08E37267S01	CAP,CER. 0.047uF/25V
MAIN-P.W.Board		C3628	08E37267S01	CAP,CER. 0.047uF/25V
MAIN-P.W.Board		C3629	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board		C3630	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board		C3633	08E40363S01	CAP,CER. 2.2uF/16V
MAIN-P.W.Board		C3634	08E38604S01	CAP,CER. 1uF/50V
MAIN-P.W.Board		C3635	08E38604S01	CAP,CER. 1uF/50V
MAIN-P.W.Board		C3636	08E40363S01	CAP,CER. 2.2uF/16V
MAIN-P.W.Board		C3637	08E37268S01	CAP,CER. 120pF/50V
MAIN-P.W.Board		C3638	08E37268S01	CAP,CER. 120pF/50V
MAIN-P.W.Board		C3639	08E37267S01	CAP,CER. 0.047uF/25V
MAIN-P.W.Board		C3640	08E37267S01	CAP,CER. 0.047uF/25V
MAIN-P.W.Board		C3641	08E41389S01	CAP,CER. 3300pF/50V
MAIN-P.W.Board		C3642	08E41389S01	CAP,CER. 3300pF/50V
MAIN-P.W.Board		C3643	08E41389S01	CAP,CER. 3300pF/50V
MAIN-P.W.Board		C3644	08E41389S01	CAP,CER. 3300pF/50V
MAIN-P.W.Board		C3701	08E40902S01	CAP,CER. 0.47uF/16V
MAIN-P.W.Board		C3702	08E40902S01	CAP,CER. 0.47uF/16V
MAIN-P.W.Board		C3703	08E40902S01	CAP,CER. 0.47uF/16V
MAIN-P.W.Board		C3704	08E40902S01	CAP,CER. 0.47uF/16V
MAIN-P.W.Board		C3705	08E41394S01	CAP,CER.470pF/630V
MAIN-P.W.Board		C3706	08E41394S01	CAP,CER.470pF/630V
MAIN-P.W.Board		C3707	08E41394S01	CAP,CER.470pF/630V
MAIN-P.W.Board		C3708	08E41394S01	CAP,CER.470pF/630V
MAIN-P.W.Board		C3709	08E39107S01	CAP,CER.0.33uF/100V
MAIN-P.W.Board		C3710	08E39107S01	CAP,CER.0.33uF/100V
MAIN-P.W.Board		C3711	08E39107S01	CAP,CER.0.33uF/100V
MAIN-P.W.Board		C3712	08E39107S01	CAP,CER.0.33uF/100V
MAIN-P.W.Board		C3713	08E39107S01	CAP,CER.0.33uF/100V
MAIN-P.W.Board		C3714	08E39107S01	CAP,CER.0.33uF/100V
MAIN-P.W.Board		C3715	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board		C3716	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board		C3717	08E40902S01	CAP,CER. 0.47uF/16V
MAIN-P.W.Board		C3718	08E40902S01	CAP,CER. 0.47uF/16V
MAIN-P.W.Board		C3719	08E40902S01	CAP,CER. 0.47uF/16V
MAIN-P.W.Board		C3720	08E40902S01	CAP,CER. 0.47uF/16V
MAIN-P.W.Board		C3755	08E41394S01	CAP,CER.470pF/630V
MAIN-P.W.Board		C3756	08E41394S01	CAP,CER.470pF/630V
MAIN-P.W.Board		C3757	08E41394S01	CAP,CER.470pF/630V
MAIN-P.W.Board		C3758	08E41394S01	CAP,CER.470pF/630V
MAIN-P.W.Board		C3759	08E39107S01	CAP,CER.0.33uF/100V
MAIN-P.W.Board		C3760	08E39107S01	CAP,CER.0.33uF/100V
MAIN-P.W.Board		C3761	08E39107S01	CAP,CER.0.33uF/100V
MAIN-P.W.Board		C3762	08E39107S01	CAP,CER.0.33uF/100V
MAIN-P.W.Board		C3763	08E39107S01	CAP,CER.0.33uF/100V
MAIN-P.W.Board		C3764	08E39107S01	CAP,CER.0.33uF/100V

MAIN-P.W.Board		C3765	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board		C3766	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board		C4003	08E38112S01	CAP,FILM 1uF/100V
MAIN-P.W.Board		C4004	08E38112S01	CAP,FILM 1uF/100V
MAIN-P.W.Board		C4053	08E38112S01	CAP,FILM 1uF/100V
MAIN-P.W.Board		C4054	08E38112S01	CAP,FILM 1uF/100V
MAIN-P.W.Board		C4101	08E37159S01	CAP,CER. 0.047uF/50V
MAIN-P.W.Board		C4103	08E36625S01	CAP,CER. 1500,□ F/50V
MAIN-P.W.Board		C4104	08E36625S01	CAP,CER. 1500,□ F/50V
MAIN-P.W.Board		C4105	08E36625S01	CAP,CER. 1500,□ F/50V
MAIN-P.W.Board		C4106	08E36625S01	CAP,CER. 1500,□ F/50V
MAIN-P.W.Board		C4116	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board		C4117	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board		C4118	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board		C4119	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board		C4206	08E39103S01	CAP,CER.1000pF/500V
MAIN-P.W.Board		C4207	08E39103S01	CAP,CER.1000pF/500V
MAIN-P.W.Board		C4208	08E39104S01	CAP,CER.0.01uF/500V
MAIN-P.W.Board		C4209	08E39104S01	CAP,CER.0.01uF/500V
MAIN-P.W.Board		C4210	08E39103S01	CAP,CER.1000pF/500V
MAIN-P.W.Board		C4211	08E39103S01	CAP,CER.1000pF/500V
MAIN-P.W.Board		C4256	08E39103S01	CAP,CER.1000pF/500V
MAIN-P.W.Board		C4257	08E39103S01	CAP,CER.1000pF/500V
MAIN-P.W.Board		C4258	08E39104S01	CAP,CER.0.01uF/500V
MAIN-P.W.Board		C4259	08E39104S01	CAP,CER.0.01uF/500V
MAIN-P.W.Board		C4260	08E39103S01	CAP,CER.1000pF/500V
MAIN-P.W.Board		C4261	08E39103S01	CAP,CER.1000pF/500V
MAIN-P.W.Board		C5001	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board		C5002	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board		C5003	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board		C5004	08E37121S01	CAP,CER. 0.022uF/50V
MAIN-P.W.Board		C5005	08E40362S01	CAP,CER. 6800pF/50V
MAIN-P.W.Board		C5006	08E41031S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board		C5007	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board		C5008	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board		C5009	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board		C5010	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board		C5011	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board		C5012	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board		C5013	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board		C5014	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board		C5015	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board		C5016	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board		C5017	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board		C5018	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board		C5019	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board		C5020	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board		C5021	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board		C5601	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board		C5602	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board		C5603	08E37268S01	CAP,CER. 120pF/50V
MAIN-P.W.Board		C5604	08E37268S01	CAP,CER. 120pF/50V
MAIN-P.W.Board		C5605	08E38046S01	CAP,CER. 820pF/50V
MAIN-P.W.Board		C5606	08E38046S01	CAP,CER. 820pF/50V
MAIN-P.W.Board		C5607	08E36471S01	CAP,CER. 470pF/50V
MAIN-P.W.Board		C5608	08E36471S01	CAP,CER. 470pF/50V
MAIN-P.W.Board		C5609	08E41492S01	CAP,CER.2700pF/50V

MAIN-P.W.Board		C5610	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board		C5611	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board		C5612	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board		C5613	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board		C5614	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board		C5615	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board		C5616	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board		C5617	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board		C5618	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board		C5619	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board		C5620	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board		C5621	08E37267S01	CAP,CER. 0.047uF/25V
MAIN-P.W.Board		C5622	08E37267S01	CAP,CER. 0.047uF/25V
MAIN-P.W.Board		C5623	08E38036S01	CAP,CER. 330pF/50V
MAIN-P.W.Board		C5624	08E38036S01	CAP,CER. 330pF/50V
MAIN-P.W.Board		C5625	08E38036S01	CAP,CER. 330pF/50V
MAIN-P.W.Board		C5626	08E38036S01	CAP,CER. 330pF/50V
MAIN-P.W.Board		C5627	08E37267S01	CAP,CER. 0.047uF/25V
MAIN-P.W.Board		C5628	08E37267S01	CAP,CER. 0.047uF/25V
MAIN-P.W.Board		C5629	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board		C5630	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board		C5633	08E40363S01	CAP,CER. 2.2uF/16V
MAIN-P.W.Board		C5634	08E38604S01	CAP,CER. 1uF/50V
MAIN-P.W.Board		C5635	08E38604S01	CAP,CER. 1uF/50V
MAIN-P.W.Board		C5636	08E40363S01	CAP,CER. 2.2uF/16V
MAIN-P.W.Board		C5637	08E37268S01	CAP,CER. 120pF/50V
MAIN-P.W.Board		C5638	08E37268S01	CAP,CER. 120pF/50V
MAIN-P.W.Board		C5639	08E37267S01	CAP,CER. 0.047uF/25V
MAIN-P.W.Board		C5640	08E37267S01	CAP,CER. 0.047uF/25V
MAIN-P.W.Board		C5641	08E41389S01	CAP,CER. 3300pF/50V
MAIN-P.W.Board		C5642	08E41389S01	CAP,CER. 3300pF/50V
MAIN-P.W.Board		C5643	08E41389S01	CAP,CER. 3300pF/50V
MAIN-P.W.Board		C5644	08E41389S01	CAP,CER. 3300pF/50V
MAIN-P.W.Board		C8001	08E37118S01	CAP,CER. 220pF/50V
MAIN-P.W.Board		C8002	08E37118S01	CAP,CER. 220pF/50V
MAIN-P.W.Board		C8003	08E37118S01	CAP,CER. 220pF/50V
MAIN-P.W.Board		C8901	08E41032S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board		C8902	08E41032S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board		C9001	08E39106S01	CAP,CER.100pF/500V
MAIN-P.W.Board		C9002	08E39104S01	CAP,CER.0.01uF/500V
MAIN-P.W.Board		C9003	08E39106S01	CAP,CER.100pF/500V
MAIN-P.W.Board		C9101	08E41031S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board		C9301	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board		C9302	08E41392S01	CAP,CER.2200pF/50V
MAIN-P.W.Board		C9303	08E41031S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board		C9305	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board		C9307	08E39103S01	CAP,CER.1000pF/500V
MAIN-P.W.Board		C9308	08E39103S01	CAP,CER.1000pF/500V
MAIN-P.W.Board		C9309	08E41032S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board		C9310	08E41032S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board		C9311	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board		C9313	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board		C9314	08E41032S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board		C9702	08E40902S01	CAP,CER. 0.47uF/16V
MAIN-P.W.Board		C9703	08E40362S01	CAP,CER. 6800pF/50V
MAIN-P.W.Board		C9704	08E41031S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board		C9705	08E41032S01	CAP,CER. 0.1uF/50V

MAIN-P.W.Board		C9801	08E41032S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board		C9901	08E39188S01	CAP,CER.2200pF/500V
MAIN-P.W.Board		C9902	08E39188S01	CAP,CER.2200pF/500V
MAIN-P.W.Board		C9903	08E41491S01	CAP,CER.4700pF/500V
MAIN-P.W.Board		C9904	08E41491S01	CAP,CER.4700pF/500V
MAIN-P.W.Board		C9905	08E40759S01	CAP,CER.1000pF/100V
MAIN-P.W.Board		C9906	08E39657S01	CAP,CER. 0.15uF/100V
MAIN-P.W.Board		C9907	08E39657S01	CAP,CER. 0.15uF/100V
MAIN-P.W.Board		C9908	08E40759S01	CAP,CER.1000pF/100V
MAIN-P.W.Board		CB1401	09E39715S01	CONN,FFC 14P
MAIN-P.W.Board		CB4201	09E41510S01	CONN,SPK-CON
MAIN-P.W.Board		CB4251	09E41510S01	CONN,SPK-CON
MAIN-P.W.Board		CB8001	09E41441S01	CONN,WTB 2P
MAIN-P.W.Board		CL5001	91E40781S01	RESONATOR,7.7MHz
MAIN-P.W.Board		D1701	48E36633S01	DIODE,DAP202K
MAIN-P.W.Board		D1702	48E36633S01	DIODE,DAP202K
MAIN-P.W.Board		D1801	48E36633S01	DIODE,DAP202K
MAIN-P.W.Board		D1802	48E36633S01	DIODE,DAP202K
MAIN-P.W.Board		D2001	48E36568S01	DIODE,DAN202K
MAIN-P.W.Board		D2002	48E38037S01	DIODE,1PS226
MAIN-P.W.Board		D2003	48E38037S01	DIODE,1PS226
MAIN-P.W.Board		D2004	48E38037S01	DIODE,1PS226
MAIN-P.W.Board		D2005	48E38547S01	DIODE,DAN202U
MAIN-P.W.Board		D2006	48E38037S01	DIODE,1PS226
MAIN-P.W.Board		D2007	48E38037S01	DIODE,1PS226
MAIN-P.W.Board		D2008	48E38037S01	DIODE,1PS226
MAIN-P.W.Board		D2009	48E38037S01	DIODE,1PS226
MAIN-P.W.Board		D2010	48E38037S01	DIODE,1PS226
MAIN-P.W.Board		D3601	48E41411S01	DIODE,DAP202U
MAIN-P.W.Board		D3602	48E41411S01	DIODE,DAP202U
MAIN-P.W.Board		D3603	48E41409S01	DIODE,1SR159
MAIN-P.W.Board		D3604	48E41409S01	DIODE,1SR159
MAIN-P.W.Board		D3605	48E41409S01	DIODE,1SR159
MAIN-P.W.Board		D3606	48E41409S01	DIODE,1SR159
MAIN-P.W.Board		D3607	48E41409S01	DIODE,1SR159
MAIN-P.W.Board		D3608	48E41409S01	DIODE,1SR159
MAIN-P.W.Board		D5001	48E39348S01	DIODE,1SR154-400
MAIN-P.W.Board		D5002	48E40338S01	DIODE,KDR720E
MAIN-P.W.Board		D5003	48E36568S01	DIODE,DAN202K
MAIN-P.W.Board		D5601	48E41411S01	DIODE,DAP202U
MAIN-P.W.Board		D5602	48E41411S01	DIODE,DAP202U
MAIN-P.W.Board		D5603	48E41409S01	DIODE,1SR159
MAIN-P.W.Board		D5604	48E41409S01	DIODE,1SR159
MAIN-P.W.Board		D5605	48E41409S01	DIODE,1SR159
MAIN-P.W.Board		D5606	48E41409S01	DIODE,1SR159
MAIN-P.W.Board		D5607	48E41409S01	DIODE,1SR159
MAIN-P.W.Board		D5608	48E41409S01	DIODE,1SR159
MAIN-P.W.Board		D9101	48E39121S01	DIODE,GN1D
MAIN-P.W.Board		D9301	48E41409S01	DIODE,1SR159
MAIN-P.W.Board		D9302	48E41409S01	DIODE,1SR159
MAIN-P.W.Board		D9501	48E41046S01	DIODE,1SS355
MAIN-P.W.Board		D9502	48E36568S01	DIODE,DAN202K
MAIN-P.W.Board		D9901	48E41410S01	DIODE,D30XBN20
MAIN-P.W.Board		E1501	23E38100S01	CAP,ELY. 4.7uF/50V
MAIN-P.W.Board		E1502	23E38100S01	CAP,ELY. 4.7uF/50V
MAIN-P.W.Board		E1701	23E41496S01	CAP,ELY. 39uF/16V
MAIN-P.W.Board		E1702	23E41496S01	CAP,ELY. 39uF/16V

MAIN-P.W.Board		E1703	23E41496S01	CAP,ELY. 39uF/16V
MAIN-P.W.Board		E1704	23E41496S01	CAP,ELY. 39uF/16V
MAIN-P.W.Board		E3601	23E40760S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E3602	23E40760S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E3603	23E41493S01	CAP,ELY. 1uF/50V
MAIN-P.W.Board		E3604	23E41493S01	CAP,ELY. 1uF/50V
MAIN-P.W.Board		E3605	23E41495S01	CAP,ELY. 33uF/50V
MAIN-P.W.Board		E3606	23E41495S01	CAP,ELY. 33uF/50V
MAIN-P.W.Board		E3607	23E41495S01	CAP,ELY. 33uF/50V
MAIN-P.W.Board		E3608	23E41495S01	CAP,ELY. 33uF/50V
MAIN-P.W.Board		E5001	23E40237S01	CAP,ELY. 33uF/16V
MAIN-P.W.Board		E5002	23E40237S01	CAP,ELY. 33uF/16V
MAIN-P.W.Board		E5601	23E40760S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E5602	23E40760S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E5603	23E41493S01	CAP,ELY. 1uF/50V
MAIN-P.W.Board		E5604	23E41493S01	CAP,ELY. 1uF/50V
MAIN-P.W.Board		E5605	23E41495S01	CAP,ELY. 33uF/50V
MAIN-P.W.Board		E5606	23E41495S01	CAP,ELY. 33uF/50V
MAIN-P.W.Board		E5607	23E41495S01	CAP,ELY. 33uF/50V
MAIN-P.W.Board		E5608	23E41495S01	CAP,ELY. 33uF/50V
MAIN-P.W.Board		E8901	23E38008S01	CAP,ELY. 47uF/25V
MAIN-P.W.Board		E8909	23E40369S01	CAP,ELY.470uF/16V
MAIN-P.W.Board		E9101	23E38013S01	CAP,ELY. 470uF/25V
MAIN-P.W.Board		E9301	23E40765S01	CAP,ELY.330uF/10V
MAIN-P.W.Board		E9302	23E41398S01	CAP,ELY.22uF/16V
MAIN-P.W.Board		E9303	23E41398S01	CAP,ELY.22uF/16V
MAIN-P.W.Board		E9305	23E40364S01	CAP,ELY.100uF/25V
MAIN-P.W.Board		E9306	23E40764S01	CAP,ELY.220uF/16V
MAIN-P.W.Board		E9307	23E40764S01	CAP,ELY.220uF/16V
MAIN-P.W.Board		E9308	23E38013S01	CAP,ELY. 470uF/25V
MAIN-P.W.Board		E9310	23E40764S01	CAP,ELY.220uF/16V
MAIN-P.W.Board		E9311	23E38013S01	CAP,ELY. 470uF/25V
MAIN-P.W.Board		E9312	23E38013S01	CAP,ELY. 470uF/25V
MAIN-P.W.Board		E9702	23E41398S01	CAP,ELY.22uF/16V
MAIN-P.W.Board		E9703	23E39871S01	CAP,ELY. 100uF/16V
MAIN-P.W.Board		E9704	23E41398S01	CAP,ELY.22uF/16V
MAIN-P.W.Board		E9801	23E38008S01	CAP,ELY. 47uF/25V
MAIN-P.W.Board		E9901	23E40240S01	CAP,ELY. 2200uF/25V
MAIN-P.W.Board		E9902	23E40240S01	CAP,ELY. 2200uF/25V
MAIN-P.W.Board		E9903	23E40240S01	CAP,ELY. 2200uF/25V
MAIN-P.W.Board		E9904	23E41494S01	CAP,ELY. 8200uF/50V
MAIN-P.W.Board		E9905	23E41494S01	CAP,ELY. 8200uF/50V
MAIN-P.W.Board		F001	65E38096S01	FUSE,AUTO 30A
MAIN-P.W.Board		F002	65E38096S01	FUSE,AUTO 30A
MAIN-P.W.Board		F9301	65E41448S01	FUSE,15A
MAIN-P.W.Board		F9901	65E41448S01	FUSE,15A
MAIN-P.W.Board		F9902	65E41448S01	FUSE,15A
MAIN-P.W.Board		F9903	65E41448S01	FUSE,15A
MAIN-P.W.Board		F9904	65E41448S01	FUSE,15A
MAIN-P.W.Board		F9905	65E41448S01	FUSE,15A
MAIN-P.W.Board		F9906	65E41448S01	FUSE,15A
MAIN-P.W.Board		F9907	65E41448S01	FUSE,15A
MAIN-P.W.Board		F9908	65E41448S01	FUSE,15A
MAIN-P.W.Board		HL9001	09E39445S01	HOLDER,FUSE
MAIN-P.W.Board		IC1401	51E40776S01	IC,BA4580RFVM
MAIN-P.W.Board		IC1501	51E40776S01	IC,BA4580RFVM
MAIN-P.W.Board		IC1502	51E40776S01	IC,BA4580RFVM

MAIN-P.W.Board		IC1503	51E40776S01	IC,BA4580RFVM
MAIN-P.W.Board		IC1504	51E40776S01	IC,BA4580RFVM
MAIN-P.W.Board		IC2001	51E40776S01	IC,BA4580RFVM
MAIN-P.W.Board		IC2002	51E40776S01	IC,BA4580RFVM
MAIN-P.W.Board		IC2003	51E40776S01	IC,BA4580RFVM
MAIN-P.W.Board		IC3601	51E41429S01	IC,BA4580RF
MAIN-P.W.Board		IC3602	51E41430S01	IC,BA4580RF
MAIN-P.W.Board		IC3603	51E41426S01	IC,98-1036TR
MAIN-P.W.Board		IC3604	51E41426S01	IC,98-1036TR
MAIN-P.W.Board		IC3607	51E38067S01	IC,KIC7S00FU
MAIN-P.W.Board		IC3608	51E38067S01	IC,KIC7S00FU
MAIN-P.W.Board		IC4101	51E39596S01	IC,BA2901FV
MAIN-P.W.Board		IC4106	51E41502S01	IC,74VHC00MX_NL
MAIN-P.W.Board		IC4107	51E40343S01	IC,74VHC74MTCX
MAIN-P.W.Board		IC5001	51E36635S01	IC,NJU7222U50
MAIN-P.W.Board		IC5002	51E39139S01	IC,BD5243G
MAIN-P.W.Board		IC5003	51E40344S01	IC,BD5240G
MAIN-P.W.Board		IC5004	51-04615Z01	IC,TMP87C847UG -QT
MAIN-P.W.Board		IC5005	51E39395S01	IC,KIC7S04FU
MAIN-P.W.Board		IC5006	51E41501S01	IC,KIC7S32FU
MAIN-P.W.Board		IC5601	51E41429S01	IC,BA4580RF
MAIN-P.W.Board		IC5602	51E41430S01	IC,BA4580RF
MAIN-P.W.Board		IC5603	51E41426S01	IC,98-1036TR
MAIN-P.W.Board		IC5604	51E41426S01	IC,98-1036TR
MAIN-P.W.Board		IC5607	51E38067S01	IC,KIC7S00FU
MAIN-P.W.Board		IC5608	51E38067S01	IC,KIC7S00FU
MAIN-P.W.Board		IC8901	51E41428S01	IC,BAJ2CC0FP
MAIN-P.W.Board		IC9301	51E39585S01	IC,NCV494BDR2G
MAIN-P.W.Board		IC9302	51E41428S01	IC,BAJ2CC0FP
MAIN-P.W.Board		IC9303	51E39892S01	IC,NJM78M15DL1A
MAIN-P.W.Board		IC9304	51E39893S01	IC,NJM79M15DL1A
MAIN-P.W.Board		IC9702	51E39585S01	IC,NCV494BDR2G
MAIN-P.W.Board		IC9801	51E34504S01	IC,MC33152D
MAIN-P.W.Board		L4001	24E39741S01	COIL,CHOKE 15uH
MAIN-P.W.Board		L4002	24E39741S01	COIL,CHOKE 15uH
MAIN-P.W.Board		L4051	24E39741S01	COIL,CHOKE 15uH
MAIN-P.W.Board		L4052	24E39741S01	COIL,CHOKE 15uH
MAIN-P.W.Board		L9001	24E39739S01	COIL,IND. 10uH
MAIN-P.W.Board		LD8001	48E41405S01	LED,SML512BC5T BLUE
MAIN-P.W.Board		LD8002	48E41405S01	LED,SML512BC5T BLUE
MAIN-P.W.Board		LD8003	48E41406S01	LED,SML-512UW RED
MAIN-P.W.Board		Q1701	48E39389S01	TR,KTC2875
MAIN-P.W.Board		Q1702	48E39389S01	TR,KTC2875
MAIN-P.W.Board		Q1703	48E39389S01	TR,KTC2875
MAIN-P.W.Board		Q1704	48E39389S01	TR,KTC2875
MAIN-P.W.Board		Q1705	48E37893S01	TR,DTA114EE
MAIN-P.W.Board		Q1706	48E37097S01	TR,DTC114EE
MAIN-P.W.Board		Q1707	48E37097S01	TR,DTC114EE
MAIN-P.W.Board		Q1801	48E39389S01	TR,KTC2875
MAIN-P.W.Board		Q1802	48E39389S01	TR,KTC2875
MAIN-P.W.Board		Q1803	48E39389S01	TR,KTC2875
MAIN-P.W.Board		Q1804	48E39389S01	TR,KTC2875
MAIN-P.W.Board		Q1805	48E37893S01	TR,DTA114EE
MAIN-P.W.Board		Q1806	48E37097S01	TR,DTC114EE
MAIN-P.W.Board		Q1807	48E37097S01	TR,DTC114EE
MAIN-P.W.Board		Q2001	48E37188S01	TR,DTC144EE
MAIN-P.W.Board		Q2002	48E37188S01	TR,DTC144EE

MAIN-P.W.Board		Q2003	48E37188S01	TR,DTC144EE
MAIN-P.W.Board		Q2004	48E37188S01	TR,DTC144EE
MAIN-P.W.Board		Q3601	48E41423S01	TR,UMY1N
MAIN-P.W.Board		Q3602	48E41423S01	TR,UMY1N
MAIN-P.W.Board		Q3603	48E41420S01	TR,IMT4
MAIN-P.W.Board		Q3604	48E41420S01	TR,IMT4
MAIN-P.W.Board		Q3605	48E41420S01	TR,IMT4
MAIN-P.W.Board		Q3606	48E41420S01	TR,IMT4
MAIN-P.W.Board		Q3607	48E40339S01	TR,2N5400S
MAIN-P.W.Board		Q3608	48E40339S01	TR,2N5400S
MAIN-P.W.Board		Q3609	48E41420S01	TR,IMT4
MAIN-P.W.Board		Q3610	48E41420S01	TR,IMT4
MAIN-P.W.Board		Q3611	48E40770S01	TR,DTA144EE
MAIN-P.W.Board		Q3612	48E40770S01	TR,DTA144EE
MAIN-P.W.Board		Q3613	48E37097S01	TR,DTC114EE
MAIN-P.W.Board		Q3614	48E37097S01	TR,DTC114EE
MAIN-P.W.Board		Q3615	48E41051S01	TR,2SC2412K
MAIN-P.W.Board		Q3616	48E41051S01	TR,2SC2412K
MAIN-P.W.Board		Q3617	48E40770S01	TR,DTA144EE
MAIN-P.W.Board		Q3618	48E40770S01	TR,DTA144EE
MAIN-P.W.Board		Q3619	48E41498S01	TR,IMT2A
MAIN-P.W.Board		Q3620	48E41425S01	TR,IMX2
MAIN-P.W.Board		Q3621	48E41425S01	TR,IMX2
MAIN-P.W.Board		Q3622	48E41498S01	TR,IMT2A
MAIN-P.W.Board		Q3623	48E41425S01	TR,IMX2
MAIN-P.W.Board		Q3624	48E41425S01	TR,IMX2
MAIN-P.W.Board		Q3709	48E41500S01	FET,FDP3682
MAIN-P.W.Board		Q3710	48E41500S01	FET,FDP3682
MAIN-P.W.Board		Q3711	48E41500S01	FET,FDP3682
MAIN-P.W.Board		Q3712	48E41500S01	FET,FDP3682
MAIN-P.W.Board		Q3759	48E41500S01	FET,FDP3682
MAIN-P.W.Board		Q3760	48E41500S01	FET,FDP3682
MAIN-P.W.Board		Q3761	48E41500S01	FET,FDP3682
MAIN-P.W.Board		Q3762	48E41500S01	FET,FDP3682
MAIN-P.W.Board		Q4109	48E40770S01	TR,DTA144EE
MAIN-P.W.Board		Q4110	48E40770S01	TR,DTA144EE
MAIN-P.W.Board		Q4111	48E40770S01	TR,DTA144EE
MAIN-P.W.Board		Q4112	48E40770S01	TR,DTA144EE
MAIN-P.W.Board		Q5001	48E37097S01	TR,DTC114EE
MAIN-P.W.Board		Q5002	48E37097S01	TR,DTC114EE
MAIN-P.W.Board		Q5601	48E41423S01	TR,UMY1N
MAIN-P.W.Board		Q5602	48E41423S01	TR,UMY1N
MAIN-P.W.Board		Q5603	48E41420S01	TR,IMT4
MAIN-P.W.Board		Q5604	48E41420S01	TR,IMT4
MAIN-P.W.Board		Q5605	48E41420S01	TR,IMT4
MAIN-P.W.Board		Q5606	48E41420S01	TR,IMT4
MAIN-P.W.Board		Q5607	48E40339S01	TR,2N5400S
MAIN-P.W.Board		Q5608	48E40339S01	TR,2N5400S
MAIN-P.W.Board		Q5609	48E41420S01	TR,IMT4
MAIN-P.W.Board		Q5610	48E41420S01	TR,IMT4
MAIN-P.W.Board		Q5611	48E40770S01	TR,DTA144EE
MAIN-P.W.Board		Q5612	48E40770S01	TR,DTA144EE
MAIN-P.W.Board		Q5613	48E37097S01	TR,DTC114EE
MAIN-P.W.Board		Q5614	48E37097S01	TR,DTC114EE
MAIN-P.W.Board		Q5615	48E41051S01	TR,2SC2412K
MAIN-P.W.Board		Q5616	48E41051S01	TR,2SC2412K
MAIN-P.W.Board		Q5617	48E40770S01	TR,DTA144EE

MAIN-P.W.Board			Q5618	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q5619	48E41498S01	TR,IMT2A
MAIN-P.W.Board			Q5620	48E41425S01	TR,IMX2
MAIN-P.W.Board			Q5621	48E41425S01	TR,IMX2
MAIN-P.W.Board			Q5622	48E41498S01	TR,IMT2A
MAIN-P.W.Board			Q5623	48E41425S01	TR,IMX2
MAIN-P.W.Board			Q5624	48E41425S01	TR,IMX2
MAIN-P.W.Board			Q8001	48E40340S01	TR,DTC143XKA
MAIN-P.W.Board			Q8002	48E40340S01	TR,DTC143XKA
MAIN-P.W.Board			Q9101	48E36577S01	TR,2SB1238P
MAIN-P.W.Board			Q9102	48E41051S01	TR,2SC2412K
MAIN-P.W.Board			Q9301	48E36597S01	TR,DTA124EKA
MAIN-P.W.Board			Q9302	48E41421S01	TR,IMT17
MAIN-P.W.Board			Q9303	48E41499S01	FET,RSS065N06
MAIN-P.W.Board			Q9304	48E41499S01	FET,RSS065N06
MAIN-P.W.Board			Q9501	48E39883S01	TR,2SC4102
MAIN-P.W.Board			Q9502	48E37188S01	TR,DTC144EE
MAIN-P.W.Board			Q9503	48E39883S01	TR,2SC4102
MAIN-P.W.Board			Q9708	48E40769S01	TR,DTA124EE
MAIN-P.W.Board			Q9901	48E37986S01	FET,IRF3205PB
MAIN-P.W.Board			Q9902	48E37986S01	FET,IRF3205PB
MAIN-P.W.Board			Q9903	48E37986S01	FET,IRF3205PB
MAIN-P.W.Board			Q9904	48E37986S01	FET,IRF3205PB
MAIN-P.W.Board			R1401	06E40318S01	RES,CF. 5.6K-1/10W
MAIN-P.W.Board			R1402	06E40318S01	RES,CF. 5.6K-1/10W
MAIN-P.W.Board			R1403	06E36623S01	RES,CF. 1M-1/16W
MAIN-P.W.Board			R1404	06E36623S01	RES,CF. 1M-1/16W
MAIN-P.W.Board			R1405	06E40553S01	RES,CF. 2.4K-1/16
MAIN-P.W.Board			R1406	06E40553S01	RES,CF. 2.4K-1/16
MAIN-P.W.Board		#1	R1407	06E40331S01	RES,CF. 4.7-1/16W
MAIN-P.W.Board		\$1	R1407	06E40331S01	RES,CF. 4.7-1/16W
MAIN-P.W.Board		%1	R1407	06E36464S01	RES,CF.0-1/16W
MAIN-P.W.Board		&1	R1407	06E36464S01	RES,CF.0-1/16W
MAIN-P.W.Board			R1410	06E40331S01	RES,CF. 4.7-1/16W
MAIN-P.W.Board			R1411	06E40331S01	RES,CF. 4.7-1/16W
MAIN-P.W.Board		#1	R1415	06E40331S01	RES,CF. 4.7-1/16W
MAIN-P.W.Board		\$1	R1415	06E40331S01	RES,CF. 4.7-1/16W
MAIN-P.W.Board		%1	R1415	06E36464S01	RES,CF.0-1/16W
MAIN-P.W.Board		&1	R1415	06E36464S01	RES,CF.0-1/16W
MAIN-P.W.Board			R1501	06E40826S01	RES,CF. 33K-1/10W
MAIN-P.W.Board			R1502	06E40826S01	RES,CF. 33K-1/10W
MAIN-P.W.Board			R1503	06E40826S01	RES,CF. 33K-1/10W
MAIN-P.W.Board			R1504	06E40826S01	RES,CF. 33K-1/10W
MAIN-P.W.Board			R1505	06E40845S01	RES,CF. 22K-1/10W
MAIN-P.W.Board			R1506	06E40845S01	RES,CF. 22K-1/10W
MAIN-P.W.Board			R1507	06E40845S01	RES,CF. 22K-1/10W
MAIN-P.W.Board			R1508	06E40845S01	RES,CF. 22K-1/10W
MAIN-P.W.Board			R1509	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R1510	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R1511	06E40845S01	RES,CF. 22K-1/10W
MAIN-P.W.Board			R1512	06E40845S01	RES,CF. 22K-1/10W
MAIN-P.W.Board			R1513	06E40230S01	RES,CF. 1.8K-1/10W
MAIN-P.W.Board			R1514	06E40230S01	RES,CF. 1.8K-1/10W
MAIN-P.W.Board			R1515	06E40845S01	RES,CF. 22K-1/10W
MAIN-P.W.Board			R1516	06E40845S01	RES,CF. 22K-1/10W
MAIN-P.W.Board			R1517	06E40230S01	RES,CF. 1.8K-1/10W
MAIN-P.W.Board			R1518	06E40230S01	RES,CF. 1.8K-1/10W

MAIN-P.W.Board		R1519	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board		R1520	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board		R1521	06E36623S01	RES,CF. 1M-1/16W
MAIN-P.W.Board		R1522	06E36623S01	RES,CF. 1M-1/16W
MAIN-P.W.Board		R1701	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board		R1702	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board		R1703	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board		R1704	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board		R1705	06E36622S01	RES,CF. 100K-1/16W
MAIN-P.W.Board		R1706	06E36622S01	RES,CF. 100K-1/16W
MAIN-P.W.Board		R1707	06E36622S01	RES,CF. 100K-1/16W
MAIN-P.W.Board		R1708	06E36622S01	RES,CF. 100K-1/16W
MAIN-P.W.Board		R1709	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board		R1710	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board		R1711	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board		R1712	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board		R1713	06E36615S01	RES,CF. 5.6K-1/4W
MAIN-P.W.Board		R1714	06E36615S01	RES,CF. 5.6K-1/4W
MAIN-P.W.Board		R1715	06E36615S01	RES,CF. 5.6K-1/4W
MAIN-P.W.Board		R1716	06E36615S01	RES,CF. 5.6K-1/4W
MAIN-P.W.Board		R1717	06E40328S01	RES,CF. 100K-1/16W
MAIN-P.W.Board		R1718	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R1801	06E36615S01	RES,CF. 5.6K-1/4W
MAIN-P.W.Board		R1802	06E36615S01	RES,CF. 5.6K-1/4W
MAIN-P.W.Board		R1803	06E36615S01	RES,CF. 5.6K-1/4W
MAIN-P.W.Board		R1804	06E36615S01	RES,CF. 5.6K-1/4W
MAIN-P.W.Board		R1805	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R1806	06E40328S01	RES,CF. 100K-1/16W
MAIN-P.W.Board		R1808	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board		R1809	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R2001	06E37143S01	RES,CF. 24K-1/16W
MAIN-P.W.Board		R2002	06E40745S01	RES,CF. 47K-1/16W
MAIN-P.W.Board		R2003	06E37143S01	RES,CF. 24K-1/16W
MAIN-P.W.Board		R2004	06E36591S01	RES,CF. 18K-1/16W
MAIN-P.W.Board		R2005	06E40323S01	RES,CF. 20K-1/16W
MAIN-P.W.Board		R2006	06E40318S01	RES,CF. 5.6K-1/10W
MAIN-P.W.Board		R2007	06E40321S01	RES,CF. 10K-1/10W
MAIN-P.W.Board		R2008	06E40745S01	RES,CF. 47K-1/16W
MAIN-P.W.Board		R2009	06E40327S01	RES,CF. 56K-1/16W
MAIN-P.W.Board		R2010	06E40745S01	RES,CF. 47K-1/16W
MAIN-P.W.Board		R2011	06E40229S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board		R2012	06E40229S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board		R2013	06E40229S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board		R2014	06E40824S01	RES,CF. 2.2K-1/10W
MAIN-P.W.Board		R2015	06E40745S01	RES,CF. 47K-1/16W
MAIN-P.W.Board		R2016	06E40745S01	RES,CF. 47K-1/16W
MAIN-P.W.Board		R2017	06E40745S01	RES,CF. 47K-1/16W
MAIN-P.W.Board		R2018	06E40229S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board		R2019	06E36591S01	RES,CF. 18K-1/16W
MAIN-P.W.Board		R2020	06E40327S01	RES,CF. 56K-1/16W
MAIN-P.W.Board		R2021	06E40321S01	RES,CF. 10K-1/10W
MAIN-P.W.Board		R2022	06E40825S01	RES,CF. 4.7K-1/10W
MAIN-P.W.Board		R2026	06E40229S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board		R3601	06E40229S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board		R3602	06E40229S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board		R3603	06E40229S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board		R3604	06E40229S01	RES,CF. 1.5K-1/16W

MAIN-P.W.Board		R3605	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board		R3606	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board		R3607	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board		R3608	06E36583S01	RES,CF. 0-1/4W
MAIN-P.W.Board		R3609	06E36583S01	RES,CF. 0-1/4W
MAIN-P.W.Board		R3610	06E34195S01	RES,CF. 680-1/16W
MAIN-P.W.Board		R3611	06E34195S01	RES,CF. 680-1/16W
MAIN-P.W.Board		R3612	06E34195S01	RES,CF. 680-1/16W
MAIN-P.W.Board		R3613	06E34195S01	RES,CF. 680-1/16W
MAIN-P.W.Board		R3614	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board		R3615	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board		R3616	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board		R3617	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board		R3618	06E34195S01	RES,CF. 680-1/16W
MAIN-P.W.Board		R3619	06E34195S01	RES,CF. 680-1/16W
MAIN-P.W.Board		R3620	06E34195S01	RES,CF. 680-1/16W
MAIN-P.W.Board		R3621	06E34195S01	RES,CF. 680-1/16W
MAIN-P.W.Board		R3622	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board		R3623	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board		R3624	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board		R3625	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board		R3626	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board		R3627	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board		R3628	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board		R3629	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board		R3630	06E36665S01	RES,CF. 1K-1/16W
MAIN-P.W.Board		R3631	06E36665S01	RES,CF. 1K-1/16W
MAIN-P.W.Board		R3632	06E40321S01	RES,CF. 10K-1/10W
MAIN-P.W.Board		R3633	06E40321S01	RES,CF. 10K-1/10W
MAIN-P.W.Board		R3634	06E40321S01	RES,CF. 10K-1/10W
MAIN-P.W.Board		R3635	06E40321S01	RES,CF. 10K-1/10W
MAIN-P.W.Board		R3636	06E40826S01	RES,CF. 33K-1/10W
MAIN-P.W.Board		R3637	06E40826S01	RES,CF. 33K-1/10W
MAIN-P.W.Board		R3638	06E40826S01	RES,CF. 33K-1/10W
MAIN-P.W.Board		R3639	06E40826S01	RES,CF. 33K-1/10W
MAIN-P.W.Board		R3640	06E41373S01	RES,CF. 100-1/16W
MAIN-P.W.Board		R3641	06E41373S01	RES,CF. 100-1/16W
MAIN-P.W.Board		R3642	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board		R3643	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board		R3644	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board		R3645	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board		R3646	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board		R3647	06E40738S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board		R3648	06E40738S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board		R3649	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board		R3650	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board		R3651	06E40738S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board		R3652	06E40738S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board		R3653	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board		R3654	06E35189S01	RES,CF. 150-1/16W
MAIN-P.W.Board		R3655	06E35189S01	RES,CF. 150-1/16W
MAIN-P.W.Board		R3656	06E35189S01	RES,CF. 150-1/16W
MAIN-P.W.Board		R3657	06E35189S01	RES,CF. 150-1/16W
MAIN-P.W.Board		R3658	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board		R3659	06E40741S01	RES,CF. 6.8K-1/16W
MAIN-P.W.Board		R3660	06E40741S01	RES,CF. 6.8K-1/16W
MAIN-P.W.Board		R3661	06E40741S01	RES,CF. 6.8K-1/16W

MAIN-P.W.Board		R3662	06E40741S01	RES,CF. 6.8K-1/16W
MAIN-P.W.Board		R3664	06E40321S01	RES,CF. 10K-1/10W
MAIN-P.W.Board		R3665	06E40321S01	RES,CF. 10K-1/10W
MAIN-P.W.Board		R3668	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board		R3669	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board		R3670	06E31154S01	RES,CF. 2.7K-1/16W
MAIN-P.W.Board		R3671	06E31154S01	RES,CF. 2.7K-1/16W
MAIN-P.W.Board		R3672	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board		R3673	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board		R3674	06E38392S01	RES,CF. 560-1/16W
MAIN-P.W.Board		R3675	06E38392S01	RES,CF. 560-1/16W
MAIN-P.W.Board		R3676	06E40983S01	RES,CF. 220-1/16W
MAIN-P.W.Board		R3677	06E40983S01	RES,CF. 220-1/16W
MAIN-P.W.Board		R3678	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R3679	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R3680	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board		R3681	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board		R3682	06E41487S01	RES,CF. 1.5K-1/8W
MAIN-P.W.Board		R3683	06E41487S01	RES,CF. 1.5K-1/8W
MAIN-P.W.Board		R3684	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R3685	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R3686	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board		R3687	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board		R3688	06E36616S01	RES,CF. 100-1/16W
MAIN-P.W.Board		R3689	06E36616S01	RES,CF. 100-1/16W
MAIN-P.W.Board		R3690	06E36585S01	RES,CF. 2.2K-1/16W
MAIN-P.W.Board		R3691	06E36585S01	RES,CF. 2.2K-1/16W
MAIN-P.W.Board		R3692	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board		R3693	06E40738S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board		R3694	06E40738S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board		R3695	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board		R3696	06E40318S01	RES,CF. 5.6K-1/10W
MAIN-P.W.Board		R3697	06E40825S01	RES,CF. 4.7K-1/10W
MAIN-P.W.Board		R3698	06E40825S01	RES,CF. 4.7K-1/10W
MAIN-P.W.Board		R3699	06E40318S01	RES,CF. 5.6K-1/10W
MAIN-P.W.Board		R3700	06E40321S01	RES,CF. 10K-1/10W
MAIN-P.W.Board		R3701	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board		R3702	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board		R3703	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board		R3704	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board		R3705	06E40321S01	RES,CF. 10K-1/10W
MAIN-P.W.Board		R3706	06E36586S01	RES,CF. 22K-1/16W
MAIN-P.W.Board		R3707	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board		R3708	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board		R3709	06E41490S01	RES,CF. 10-1/4W
MAIN-P.W.Board		R3710	06E41490S01	RES,CF. 10-1/4W
MAIN-P.W.Board		R3711	06E41490S01	RES,CF. 10-1/4W
MAIN-P.W.Board		R3712	06E41490S01	RES,CF. 10-1/4W
MAIN-P.W.Board		R3713	06E36622S01	RES,CF. 100K-1/16W
MAIN-P.W.Board		R3714	06E36622S01	RES,CF. 100K-1/16W
MAIN-P.W.Board		R3715	06E36622S01	RES,CF. 100K-1/16W
MAIN-P.W.Board		R3716	06E36622S01	RES,CF. 100K-1/16W
MAIN-P.W.Board		R3717	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board		R3718	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board		R3719	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board		R3720	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board		R3721	06E36578S01	RES,CF. 10-1/4W

MAIN-P.W.Board		R3722	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board		R3723	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board		R3724	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board		R3725	06E36586S01	RES,CF. 22K-1/16W
MAIN-P.W.Board		R3726	06E40316S01	RES,CF. 2K-1/10W
MAIN-P.W.Board		R3727	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board		R3728	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board		R3729	06E40316S01	RES,CF. 2K-1/10W
MAIN-P.W.Board		R3730	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board		R3731	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board		R3733	06E32296S01	RES,CF. 33K-1/4W
MAIN-P.W.Board		R3734	06E32296S01	RES,CF. 33K-1/4W
MAIN-P.W.Board		R3751	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board		R3752	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board		R3753	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board		R3754	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board		R3759	06E41490S01	RES,CF. 10-1/4W
MAIN-P.W.Board		R3760	06E41490S01	RES,CF. 10-1/4W
MAIN-P.W.Board		R3761	06E41490S01	RES,CF. 10-1/4W
MAIN-P.W.Board		R3762	06E41490S01	RES,CF. 10-1/4W
MAIN-P.W.Board		R3763	06E36622S01	RES,CF. 100K-1/16W
MAIN-P.W.Board		R3764	06E36622S01	RES,CF. 100K-1/16W
MAIN-P.W.Board		R3765	06E36622S01	RES,CF. 100K-1/16W
MAIN-P.W.Board		R3766	06E36622S01	RES,CF. 100K-1/16W
MAIN-P.W.Board		R3767	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board		R3768	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board		R3769	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board		R3770	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board		R3771	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board		R3772	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board		R3773	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board		R3774	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board		R4105	06E40312S01	RES,CF. 470-1/10W
MAIN-P.W.Board		R4106	06E40826S01	RES,CF. 33K-1/10W
MAIN-P.W.Board		R4108	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R4110	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R4112	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R4114	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R4117	06E36600S01	RES,CEMENT 0.01-5W
MAIN-P.W.Board		R4118	06E36600S01	RES,CEMENT 0.01-5W
MAIN-P.W.Board		R4119	06E36600S01	RES,CEMENT 0.01-5W
MAIN-P.W.Board		R4120	06E36600S01	RES,CEMENT 0.01-5W
MAIN-P.W.Board		R4125	06E36586S01	RES,CF. 22K-1/16W
MAIN-P.W.Board		R4126	06E36586S01	RES,CF. 22K-1/16W
MAIN-P.W.Board		R4127	06E36586S01	RES,CF. 22K-1/16W
MAIN-P.W.Board		R4128	06E36586S01	RES,CF. 22K-1/16W
MAIN-P.W.Board		R4137	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R4138	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R4139	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R4140	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R5001	06E40318S01	RES,CF. 5.6K-1/10W
MAIN-P.W.Board		R5002	06E40316S01	RES,CF. 2K-1/10W
MAIN-P.W.Board		R5003	06E40312S01	RES,CF. 470-1/10W
MAIN-P.W.Board		R5004	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R5005	06E40317S01	RES,CF. 3.9K-1/16W
MAIN-P.W.Board		R5006	06E40318S01	RES,CF. 5.6K-1/10W
MAIN-P.W.Board		R5007	06E40315S01	RES,CF. 1.2K-1/16W

MAIN-P.W.Board		R5008	06E40321S01	RES,CF. 10K-1/10W
MAIN-P.W.Board		R5009	06E40312S01	RES,CF. 470-1/10W
MAIN-P.W.Board		R5010	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R5012	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board		R5013	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R5014	06E32288S01	RES,CF. 6.2K-1/16W
MAIN-P.W.Board		R5015	06E41376S01	RES,CF. 220-1/16W
MAIN-P.W.Board		R5016	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R5017	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R5018	06E40321S01	RES,CF. 10K-1/10W
MAIN-P.W.Board		R5019	06E33657S01	RES,CF. 15K-1/16W
MAIN-P.W.Board		R5020	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R5021	06E36462S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board		R5022	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R5601	06E40229S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board		R5602	06E40229S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board		R5603	06E40229S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board		R5604	06E40229S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board		R5605	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board		R5606	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board		R5607	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board		R5608	06E36583S01	RES,CF. 0-1/4W
MAIN-P.W.Board		R5609	06E36583S01	RES,CF. 0-1/4W
MAIN-P.W.Board		R5610	06E34195S01	RES,CF. 680-1/16W
MAIN-P.W.Board		R5611	06E34195S01	RES,CF. 680-1/16W
MAIN-P.W.Board		R5612	06E34195S01	RES,CF. 680-1/16W
MAIN-P.W.Board		R5613	06E34195S01	RES,CF. 680-1/16W
MAIN-P.W.Board		R5614	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board		R5615	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board		R5616	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board		R5617	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board		R5618	06E34195S01	RES,CF. 680-1/16W
MAIN-P.W.Board		R5619	06E34195S01	RES,CF. 680-1/16W
MAIN-P.W.Board		R5620	06E34195S01	RES,CF. 680-1/16W
MAIN-P.W.Board		R5621	06E34195S01	RES,CF. 680-1/16W
MAIN-P.W.Board		R5622	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board		R5623	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board		R5624	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board		R5625	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board		R5626	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board		R5627	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board		R5628	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board		R5629	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board		R5630	06E36665S01	RES,CF. 1K-1/16W
MAIN-P.W.Board		R5631	06E36665S01	RES,CF. 1K-1/16W
MAIN-P.W.Board		R5632	06E40321S01	RES,CF. 10K-1/10W
MAIN-P.W.Board		R5633	06E40321S01	RES,CF. 10K-1/10W
MAIN-P.W.Board		R5634	06E40321S01	RES,CF. 10K-1/10W
MAIN-P.W.Board		R5635	06E40321S01	RES,CF. 10K-1/10W
MAIN-P.W.Board		R5636	06E40826S01	RES,CF. 33K-1/10W
MAIN-P.W.Board		R5637	06E40826S01	RES,CF. 33K-1/10W
MAIN-P.W.Board		R5638	06E40826S01	RES,CF. 33K-1/10W
MAIN-P.W.Board		R5639	06E40826S01	RES,CF. 33K-1/10W
MAIN-P.W.Board		R5640	06E41373S01	RES,CF. 100-1/16W
MAIN-P.W.Board		R5641	06E41373S01	RES,CF. 100-1/16W
MAIN-P.W.Board		R5642	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board		R5643	06E40737S01	RES,CF. 820-1/16W

MAIN-P.W.Board		R5644	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board		R5645	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board		R5646	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board		R5647	06E40738S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board		R5648	06E40738S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board		R5649	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board		R5650	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board		R5651	06E40738S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board		R5652	06E40738S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board		R5653	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board		R5654	06E35189S01	RES,CF. 150-1/16W
MAIN-P.W.Board		R5655	06E35189S01	RES,CF. 150-1/16W
MAIN-P.W.Board		R5656	06E35189S01	RES,CF. 150-1/16W
MAIN-P.W.Board		R5657	06E35189S01	RES,CF. 150-1/16W
MAIN-P.W.Board		R5658	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board		R5659	06E40741S01	RES,CF. 6.8K-1/16W
MAIN-P.W.Board		R5660	06E40741S01	RES,CF. 6.8K-1/16W
MAIN-P.W.Board		R5661	06E40741S01	RES,CF. 6.8K-1/16W
MAIN-P.W.Board		R5662	06E40741S01	RES,CF. 6.8K-1/16W
MAIN-P.W.Board		R5664	06E40321S01	RES,CF. 10K-1/10W
MAIN-P.W.Board		R5665	06E40321S01	RES,CF. 10K-1/10W
MAIN-P.W.Board		R5668	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board		R5669	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board		R5670	06E31154S01	RES,CF. 2.7K-1/16W
MAIN-P.W.Board		R5671	06E31154S01	RES,CF. 2.7K-1/16W
MAIN-P.W.Board		R5672	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board		R5673	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board		R5674	06E38392S01	RES,CF. 560-1/16W
MAIN-P.W.Board		R5675	06E38392S01	RES,CF. 560-1/16W
MAIN-P.W.Board		R5676	06E40983S01	RES,CF. 220-1/16W
MAIN-P.W.Board		R5677	06E40983S01	RES,CF. 220-1/16W
MAIN-P.W.Board		R5678	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R5679	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R5680	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board		R5681	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board		R5682	06E41487S01	RES,CF. 1.5K-1/8W
MAIN-P.W.Board		R5683	06E41487S01	RES,CF. 1.5K-1/8W
MAIN-P.W.Board		R5684	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R5685	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R5686	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board		R5687	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board		R5688	06E36616S01	RES,CF. 100-1/16W
MAIN-P.W.Board		R5689	06E36616S01	RES,CF. 100-1/16W
MAIN-P.W.Board		R5690	06E36585S01	RES,CF. 2.2K-1/16W
MAIN-P.W.Board		R5691	06E36585S01	RES,CF. 2.2K-1/16W
MAIN-P.W.Board		R5692	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board		R5693	06E40738S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board		R5694	06E40738S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board		R5695	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board		R5696	06E40318S01	RES,CF. 5.6K-1/10W
MAIN-P.W.Board		R5697	06E40825S01	RES,CF. 4.7K-1/10W
MAIN-P.W.Board		R5698	06E40825S01	RES,CF. 4.7K-1/10W
MAIN-P.W.Board		R5699	06E40318S01	RES,CF. 5.6K-1/10W
MAIN-P.W.Board		R5700	06E40321S01	RES,CF. 10K-1/10W
MAIN-P.W.Board		R5701	06E40321S01	RES,CF. 10K-1/10W
MAIN-P.W.Board		R5702	06E36586S01	RES,CF. 22K-1/16W
MAIN-P.W.Board		R5703	06E41388S01	RES,CF. 4.7-1/4W

MAIN-P.W.Board		R5704	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board		R5705	06E36586S01	RES,CF. 22K-1/16W
MAIN-P.W.Board		R5706	06E40316S01	RES,CF. 2K-1/10W
MAIN-P.W.Board		R5707	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board		R5708	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board		R5709	06E40316S01	RES,CF. 2K-1/10W
MAIN-P.W.Board		R5710	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board		R5711	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board		R5713	06E32296S01	RES,CF. 33K-1/4W
MAIN-P.W.Board		R5714	06E32296S01	RES,CF. 33K-1/4W
MAIN-P.W.Board		R8002	06E41387S01	RES,CF. 680-1/4W
MAIN-P.W.Board		R8003	06E39850S01	RES,CF. 2K-1/4W
MAIN-P.W.Board		R8004	06E40750S01	RES,CF. 1.1K-1/4W
MAIN-P.W.Board		R9101	06E36580S01	RES,CF. 2.2K-1/4W
MAIN-P.W.Board		R9102	06E36580S01	RES,CF. 2.2K-1/4W
MAIN-P.W.Board		R9103	06E36580S01	RES,CF. 2.2K-1/4W
MAIN-P.W.Board		R9104	06E36102S01	RES,CF. 30K-1/16W
MAIN-P.W.Board		R9105	06E36580S01	RES,CF. 2.2K-1/4W
MAIN-P.W.Board		R9106	06E36581S01	RES,CF. 30K-1/4W
MAIN-P.W.Board		R9107	06E36559S01	RES,CF. 47K-1/16W
MAIN-P.W.Board		R9301	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board		R9302	06E40324S01	RES,CF. 27K-1/16W
MAIN-P.W.Board		R9303	06E40316S01	RES,CF. 2K-1/10W
MAIN-P.W.Board		R9304	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board		R9305	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board		R9306	06E36672S01	RES,CF. 39K-1/16W
MAIN-P.W.Board		R9307	06E40742S01	RES,CF. 7.5K-1/16W
MAIN-P.W.Board		R9308	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board		R9309	06E41488S01	RES,CF. 470K-1/16W
MAIN-P.W.Board		R9310	06E40324S01	RES,CF. 27K-1/16W
MAIN-P.W.Board		R9311	06E40824S01	RES,CF. 2.2K-1/10W
MAIN-P.W.Board		R9312	06E40230S01	RES,CF. 1.8K-1/10W
MAIN-P.W.Board		R9313	06E36462S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board		R9314	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board		R9315	06E37131S01	RES,CF. 39-1/4W
MAIN-P.W.Board		R9316	06E37131S01	RES,CF. 39-1/4W
MAIN-P.W.Board		R9317	06E36583S01	RES,CF. 0-1/4W
MAIN-P.W.Board		R9318	06E36622S01	RES,CF. 100K-1/16W
MAIN-P.W.Board		R9319	06E36622S01	RES,CF. 100K-1/16W
MAIN-P.W.Board		R9320	06E36583S01	RES,CF. 0-1/4W
MAIN-P.W.Board		R9324	06E36555S01	RES,CF. 33-1/4W
MAIN-P.W.Board		R9325	06E36555S01	RES,CF. 33-1/4W
MAIN-P.W.Board		R9326	06E38034S01	RES,CF. 1K-1/4W
MAIN-P.W.Board		R9327	06E38034S01	RES,CF. 1K-1/4W
MAIN-P.W.Board		R9501	06E36559S01	RES,CF. 47K-1/16W
MAIN-P.W.Board		R9502	06E36559S01	RES,CF. 47K-1/16W
MAIN-P.W.Board		R9503	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R9504	06E36559S01	RES,CF. 47K-1/16W
MAIN-P.W.Board		R9505	06E36462S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board		R9506	06E36559S01	RES,CF. 47K-1/16W
MAIN-P.W.Board		R9507	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R9508	06E36559S01	RES,CF. 47K-1/16W
MAIN-P.W.Board		R9601	06E40734S01	RES,CF. 560-1/16W
MAIN-P.W.Board		R9602	06E40741S01	RES,CF. 6.8K-1/16W
MAIN-P.W.Board		R9711	06E40314S01	RES,CF. 1.1K-1/16W
MAIN-P.W.Board		R9712	06E40733S01	RES,CF. 200-1/16W
MAIN-P.W.Board		R9718	06E40745S01	RES,CF. 47K-1/16W

MAIN-P.W.Board		R9719	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board		R9721	06E40738S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board		R9722	06E40734S01	RES,CF. 560-1/16W
MAIN-P.W.Board		R9723	06E41385S01	RES,CF. 360K-1/16W
MAIN-P.W.Board		R9724	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board		R9725	06E40745S01	RES,CF. 47K-1/16W
MAIN-P.W.Board		R9726	06E40321S01	RES,CF. 10K-1/10W
MAIN-P.W.Board		R9727	06E40316S01	RES,CF. 2K-1/10W
MAIN-P.W.Board		R9728	06E41486S01	RES,CF. 3.6K-1/16W
MAIN-P.W.Board		R9729	06E40229S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board		R9730	06E36462S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board		R9731	06E36579S01	RES,CF. 1K-1/4W
MAIN-P.W.Board		R9732	06E36579S01	RES,CF. 1K-1/4W
MAIN-P.W.Board		R9901	06E36555S01	RES,CF. 33-1/4W
MAIN-P.W.Board		R9902	06E36555S01	RES,CF. 33-1/4W
MAIN-P.W.Board		R9903	06E36555S01	RES,CF. 33-1/4W
MAIN-P.W.Board		R9904	06E36555S01	RES,CF. 33-1/4W
MAIN-P.W.Board		R9905	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board		R9906	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board		R9907	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board		R9908	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board		R9909	06E36622S01	RES,CF. 100K-1/16W
MAIN-P.W.Board		R9910	06E36622S01	RES,CF. 100K-1/16W
MAIN-P.W.Board		R9911	06E36622S01	RES,CF. 100K-1/16W
MAIN-P.W.Board		R9912	06E36622S01	RES,CF. 100K-1/16W
MAIN-P.W.Board		R9913	06E40973S01	RES,CF. 47-1/4W
MAIN-P.W.Board		R9914	06E40973S01	RES,CF. 47-1/4W
MAIN-P.W.Board		R9915	06E40973S01	RES,CF. 47-1/4W
MAIN-P.W.Board		R9916	06E40973S01	RES,CF. 47-1/4W
MAIN-P.W.Board		R9917	06E40973S01	RES,CF. 47-1/4W
MAIN-P.W.Board		R9918	06E40973S01	RES,CF. 47-1/4W
MAIN-P.W.Board		R9919	06E40973S01	RES,CF. 47-1/4W
MAIN-P.W.Board		R9920	06E40973S01	RES,CF. 47-1/4W
MAIN-P.W.Board		RA5001	06E39855S01	RES,ARRAY. 10K-1/16W
MAIN-P.W.Board		RA5002	06E39855S01	RES,ARRAY. 10K-1/16W
MAIN-P.W.Board		RA5003	06E39855S01	RES,ARRAY. 10K-1/16W
MAIN-P.W.Board		RA5004	06E39855S01	RES,ARRAY. 10K-1/16W
MAIN-P.W.Board		SD9301	48E41412S01	DIODE,RF051UA1D
MAIN-P.W.Board		SD9302	48E41412S01	DIODE,RF051UA1D
MAIN-P.W.Board		SD9303	48E41412S01	DIODE,RF051UA1D
MAIN-P.W.Board		SW1501	40E40956S01	SW,SLIDE SK-23D55-G6
MAIN-P.W.Board		T9001	25E41504S01	COIL,CHOKE 200uH
MAIN-P.W.Board		T9301	25E41505S01	TRANS,MINI
MAIN-P.W.Board		T9901	25E41503S01	TRANS,POWER 4T/12T
MAIN-P.W.Board		T9902	25E41506S01	COIL,CHOKE 200u
MAIN-P.W.Board		T9903	25E41503S01	TRANS,POWER 4T/12T
MAIN-P.W.Board		TH2002	48E40530S01	THERMISTOR,100K
MAIN-P.W.Board		TH3701	48E40346S01	THERMISTOR,10K
MAIN-P.W.Board		TH3702	48E40346S01	THERMISTOR,10K
MAIN-P.W.Board		TH3751	48E40346S01	THERMISTOR,10K
MAIN-P.W.Board		TH3752	48E40346S01	THERMISTOR,10K
MAIN-P.W.Board		TH5001	48E40530S01	THERMISTOR,100K
MAIN-P.W.Board		TH9601	48E40530S01	THERMISTOR,100K
MAIN-P.W.Board		TML9001	09E41509S01	CONN,P-CON
MAIN-P.W.Board		VOL1401	18E41507S01	VOL,ROTARY 50KX2
MAIN-P.W.Board		VOL1501	18E41440S01	VOL,ROTARY 20KX4
MAIN-P.W.Board		ZD2001	48E39101S01	DIODE,ZENER HZK6A1L

MAIN-P.W.Board		ZD3601	48E41408S01	DIO,ZENER MMSZ4684T1
MAIN-P.W.Board		ZD3602	48E41408S01	DIO,ZENER MMSZ4684T1
MAIN-P.W.Board		ZD3603	48E41407S01	DIODE,ZENER VDZ15B
MAIN-P.W.Board		ZD3604	48E41407S01	DIODE,ZENER VDZ15B
MAIN-P.W.Board		ZD3605	48E41407S01	DIODE,ZENER VDZ15B
MAIN-P.W.Board		ZD3606	48E41407S01	DIODE,ZENER VDZ15B
MAIN-P.W.Board		ZD3701	48E41497S01	DIO,ZENER Z02W2.4V
MAIN-P.W.Board		ZD3702	48E41497S01	DIO,ZENER Z02W2.4V
MAIN-P.W.Board		ZD3703	48E41497S01	DIO,ZENER Z02W2.4V
MAIN-P.W.Board		ZD3704	48E41497S01	DIO,ZENER Z02W2.4V
MAIN-P.W.Board		ZD3705	48E41497S01	DIO,ZENER Z02W2.4V
MAIN-P.W.Board		ZD3706	48E41497S01	DIO,ZENER Z02W2.4V
MAIN-P.W.Board		ZD3707	48E41497S01	DIO,ZENER Z02W2.4V
MAIN-P.W.Board		ZD3708	48E41497S01	DIO,ZENER Z02W2.4V
MAIN-P.W.Board		ZD5001	48E39118S01	DIODE,ZENER HZK15-2L
MAIN-P.W.Board		ZD5601	48E41408S01	DIO,ZENER MMSZ4684T1
MAIN-P.W.Board		ZD5602	48E41408S01	DIO,ZENER MMSZ4684T1
MAIN-P.W.Board		ZD5603	48E41407S01	DIODE,ZENER VDZ15B
MAIN-P.W.Board		ZD5604	48E41407S01	DIODE,ZENER VDZ15B
MAIN-P.W.Board		ZD5605	48E41407S01	DIODE,ZENER VDZ15B
MAIN-P.W.Board		ZD5606	48E41407S01	DIODE,ZENER VDZ15B
MAIN-P.W.Board		ZD9001	48E41047S01	DIO,ZENER Z5W27V
MAIN-P.W.Board		ZD9101	48E39101S01	DIODE,ZENER HZK6A1L
MAIN-P.W.Board		ZD9501	48E39119S01	DIODE,ZENER HZK16-1L
MAIN-P.W.Board		ZD9502	48E39119S01	DIODE,ZENER HZK16-1L
SUB-P.W.Board		C1001	08E36675S01	CAP,CER. 33pF/50V
SUB-P.W.Board		C1002	08E36675S01	CAP,CER. 33pF/50V
SUB-P.W.Board		C1003	08E36675S01	CAP,CER. 33pF/50V
SUB-P.W.Board		C1004	08E36675S01	CAP,CER. 33pF/50V
SUB-P.W.Board		C1005	08E36675S01	CAP,CER. 33pF/50V
SUB-P.W.Board		C1006	08E36675S01	CAP,CER. 33pF/50V
SUB-P.W.Board		C1007	08E36675S01	CAP,CER. 33pF/50V
SUB-P.W.Board		C1008	08E36675S01	CAP,CER. 33pF/50V
SUB-P.W.Board		C1101	08E38714S01	CAP,CER. 330pF/50V
SUB-P.W.Board		C1102	08E38714S01	CAP,CER. 330pF/50V
SUB-P.W.Board		C1103	08E38714S01	CAP,CER. 330pF/50V
SUB-P.W.Board		C1104	08E38714S01	CAP,CER. 330pF/50V
SUB-P.W.Board		C1105	08E38714S01	CAP,CER. 330pF/50V
SUB-P.W.Board		C1106	08E38714S01	CAP,CER. 330pF/50V
SUB-P.W.Board		C1107	08E38714S01	CAP,CER. 330pF/50V
SUB-P.W.Board		C1108	08E38714S01	CAP,CER. 330pF/50V
SUB-P.W.Board		C1109	08E37267S01	CAP,CER. 0.047uF/25V
SUB-P.W.Board		C1110	08E37267S01	CAP,CER. 0.047uF/25V
SUB-P.W.Board		C1111	08E37267S01	CAP,CER. 0.047uF/25V
SUB-P.W.Board		C1112	08E37267S01	CAP,CER. 0.047uF/25V
SUB-P.W.Board		C1113	08E37267S01	CAP,CER. 0.047uF/25V
SUB-P.W.Board		C1114	08E37267S01	CAP,CER. 0.047uF/25V
SUB-P.W.Board		C1115	08E37267S01	CAP,CER. 0.047uF/25V
SUB-P.W.Board		C1116	08E37267S01	CAP,CER. 0.047uF/25V
SUB-P.W.Board		C1201	08E36675S01	CAP,CER. 33pF/50V
SUB-P.W.Board		C1202	08E36675S01	CAP,CER. 33pF/50V
SUB-P.W.Board		C1203	08E36675S01	CAP,CER. 33pF/50V
SUB-P.W.Board		C1204	08E36675S01	CAP,CER. 33pF/50V
SUB-P.W.Board		C1205	08E40754S01	CAP,CER.180pF/50V
SUB-P.W.Board		C1206	08E40754S01	CAP,CER.180pF/50V
SUB-P.W.Board		C1207	08E40754S01	CAP,CER.180pF/50V
SUB-P.W.Board		C1208	08E40754S01	CAP,CER.180pF/50V

SUB-P.W.Board		C1209	08E36675S01	CAP,CER. 33pF/50V
SUB-P.W.Board		C1210	08E36675S01	CAP,CER. 33pF/50V
SUB-P.W.Board		C1211	08E36675S01	CAP,CER. 33pF/50V
SUB-P.W.Board		C1212	08E36675S01	CAP,CER. 33pF/50V
SUB-P.W.Board		C1213	08E37267S01	CAP,CER. 0.047uF/25V
SUB-P.W.Board		C1214	08E37267S01	CAP,CER. 0.047uF/25V
SUB-P.W.Board		C1215	08E37267S01	CAP,CER. 0.047uF/25V
SUB-P.W.Board		C1216	08E37267S01	CAP,CER. 0.047uF/25V
SUB-P.W.Board		C1451	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board		C1452	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board		C1453	08E35408S01	CAP,CER. 10pF/50V
SUB-P.W.Board		C1454	08E35408S01	CAP,CER. 10pF/50V
SUB-P.W.Board		C1551	08E35460S01	CAP,CER. 12pF/50V
SUB-P.W.Board		C1552	08E35460S01	CAP,CER. 12pF/50V
SUB-P.W.Board		C1553	08E37267S01	CAP,CER. 0.047uF/25V
SUB-P.W.Board		C1554	08E37267S01	CAP,CER. 0.047uF/25V
SUB-P.W.Board		C1555	08E35460S01	CAP,CER. 12pF/50V
SUB-P.W.Board		C1556	08E35460S01	CAP,CER. 12pF/50V
SUB-P.W.Board		C1557	08E38721S01	CAP,FILM 0.22uF/50V
SUB-P.W.Board		C1558	08E38721S01	CAP,FILM 0.22uF/50V
SUB-P.W.Board		C1559	08E37267S01	CAP,CER. 0.047uF/25V
SUB-P.W.Board		C1560	08E37267S01	CAP,CER. 0.047uF/25V
SUB-P.W.Board		C1561	08E38721S01	CAP,FILM 0.22uF/50V
SUB-P.W.Board		C1562	08E38721S01	CAP,FILM 0.22uF/50V
SUB-P.W.Board		CB1551	09E39715S01	CONN,FFC 14P
SUB-P.W.Board		D1101	48E38037S01	DIODE,1PS226
SUB-P.W.Board		D1102	48E38037S01	DIODE,1PS226
SUB-P.W.Board		D1103	48E38037S01	DIODE,1PS226
SUB-P.W.Board		D1104	48E38037S01	DIODE,1PS226
SUB-P.W.Board		D1105	48E38037S01	DIODE,1PS226
SUB-P.W.Board		D1106	48E38037S01	DIODE,1PS226
SUB-P.W.Board		D1107	48E38037S01	DIODE,1PS226
SUB-P.W.Board		D1108	48E38037S01	DIODE,1PS226
SUB-P.W.Board		E1101	23S75373W02	CAP,ELY 10R-1C -R2
SUB-P.W.Board		E1102	23S75373W02	CAP,ELY 10R-1C -R2
SUB-P.W.Board		E1103	23S75373W02	CAP,ELY 10R-1C -R2
SUB-P.W.Board		E1104	23S75373W02	CAP,ELY 10R-1C -R2
SUB-P.W.Board		E1105	23S75373W02	CAP,ELY 10R-1C -R2
SUB-P.W.Board		E1106	23S75373W02	CAP,ELY 10R-1C -R2
SUB-P.W.Board		E1107	23S75373W02	CAP,ELY 10R-1C -R2
SUB-P.W.Board		E1108	23S75373W02	CAP,ELY 10R-1C -R2
SUB-P.W.Board		E1503	23E40762S01	CAP,ELY.100uF/16V
SUB-P.W.Board		E1504	23E40762S01	CAP,ELY.100uF/16V
SUB-P.W.Board		IC1101	51E40776S01	IC,BA4580RFVM
SUB-P.W.Board		IC1102	51E40776S01	IC,BA4580RFVM
SUB-P.W.Board		IC1103	51E40776S01	IC,BA4580RFVM
SUB-P.W.Board		IC1104	51E40776S01	IC,BA4580RFVM
SUB-P.W.Board		IC1201	51E40776S01	IC,BA4580RFVM
SUB-P.W.Board		IC1202	51E40776S01	IC,BA4580RFVM
SUB-P.W.Board		IC1451	51E40776S01	IC,BA4580RFVM
SUB-P.W.Board		IC1551	51E40776S01	IC,BA4580RFVM
SUB-P.W.Board		IC1552	51E40776S01	IC,BA4580RFVM
SUB-P.W.Board		IC1553	51E40776S01	IC,BA4580RFVM
SUB-P.W.Board		IC1554	51E40776S01	IC,BA4580RFVM
SUB-P.W.Board		JK1001	09E41442S01	CONN,RCA 4P
SUB-P.W.Board		R1101	06E38034S01	RES,CF. 1K-1/4W
SUB-P.W.Board		R1102	06E40358S01	RES,CF. 1.2K-1/4W

SUB-P.W.Board		R1103	06E40358S01	RES,CF. 1.2K-1/4W
SUB-P.W.Board		R1104	06E38034S01	RES,CF. 1K-1/4W
SUB-P.W.Board		R1105	06E40358S01	RES,CF. 1.2K-1/4W
SUB-P.W.Board		R1106	06E38034S01	RES,CF. 1K-1/4W
SUB-P.W.Board		R1107	06E38034S01	RES,CF. 1K-1/4W
SUB-P.W.Board		R1108	06E40358S01	RES,CF. 1.2K-1/4W
SUB-P.W.Board		R1109	06E41489S01	RES,CF. 120ohm-1/4W
SUB-P.W.Board		R1110	06E41489S01	RES,CF. 120ohm-1/4W
SUB-P.W.Board		R1111	06E41489S01	RES,CF. 120ohm-1/4W
SUB-P.W.Board		R1112	06E41489S01	RES,CF. 120ohm-1/4W
SUB-P.W.Board		R1113	06E36592S01	RES,CF. 22K-1/16W
SUB-P.W.Board		R1114	06E36592S01	RES,CF. 22K-1/16W
SUB-P.W.Board		R1115	06E36592S01	RES,CF. 22K-1/16W
SUB-P.W.Board		R1116	06E36592S01	RES,CF. 22K-1/16W
SUB-P.W.Board		R1117	06E33279S01	RES,CF. 220K-1/16W
SUB-P.W.Board		R1118	06E33279S01	RES,CF. 220K-1/16W
SUB-P.W.Board		R1119	06E33279S01	RES,CF. 220K-1/16W
SUB-P.W.Board		R1120	06E33279S01	RES,CF. 220K-1/16W
SUB-P.W.Board		R1121	06E33279S01	RES,CF. 220K-1/16W
SUB-P.W.Board		R1122	06E33279S01	RES,CF. 220K-1/16W
SUB-P.W.Board		R1123	06E33279S01	RES,CF. 220K-1/16W
SUB-P.W.Board		R1124	06E33279S01	RES,CF. 220K-1/16W
SUB-P.W.Board		R1125	06E36665S01	RES,CF. 1K-1/16W
SUB-P.W.Board		R1126	06E36665S01	RES,CF. 1K-1/16W
SUB-P.W.Board		R1127	06E36665S01	RES,CF. 1K-1/16W
SUB-P.W.Board		R1128	06E36665S01	RES,CF. 1K-1/16W
SUB-P.W.Board		R1129	06E36665S01	RES,CF. 1K-1/16W
SUB-P.W.Board		R1130	06E36665S01	RES,CF. 1K-1/16W
SUB-P.W.Board		R1131	06E36665S01	RES,CF. 1K-1/16W
SUB-P.W.Board		R1132	06E36665S01	RES,CF. 1K-1/16W
SUB-P.W.Board		R1133	06E40315S01	RES,CF. 1.2K-1/16W
SUB-P.W.Board		R1134	06E40315S01	RES,CF. 1.2K-1/16W
SUB-P.W.Board		R1135	06E40315S01	RES,CF. 1.2K-1/16W
SUB-P.W.Board		R1136	06E40315S01	RES,CF. 1.2K-1/16W
SUB-P.W.Board		R1137	06E40315S01	RES,CF. 1.2K-1/16W
SUB-P.W.Board		R1138	06E40315S01	RES,CF. 1.2K-1/16W
SUB-P.W.Board		R1139	06E40315S01	RES,CF. 1.2K-1/16W
SUB-P.W.Board		R1140	06E40315S01	RES,CF. 1.2K-1/16W
SUB-P.W.Board		R1201	06E36591S01	RES,CF. 18K-1/16W
SUB-P.W.Board		R1202	06E36591S01	RES,CF. 18K-1/16W
SUB-P.W.Board		R1203	06E36591S01	RES,CF. 18K-1/16W
SUB-P.W.Board		R1204	06E36591S01	RES,CF. 18K-1/16W
SUB-P.W.Board		R1205	06E36591S01	RES,CF. 18K-1/16W
SUB-P.W.Board		R1206	06E36591S01	RES,CF. 18K-1/16W
SUB-P.W.Board		R1207	06E36591S01	RES,CF. 18K-1/16W
SUB-P.W.Board		R1208	06E36591S01	RES,CF. 18K-1/16W
SUB-P.W.Board		R1209	06E36591S01	RES,CF. 18K-1/16W
SUB-P.W.Board		R1210	06E36591S01	RES,CF. 18K-1/16W
SUB-P.W.Board		R1211	06E36591S01	RES,CF. 18K-1/16W
SUB-P.W.Board		R1212	06E36591S01	RES,CF. 18K-1/16W
SUB-P.W.Board		R1213	06E36591S01	RES,CF. 18K-1/16W
SUB-P.W.Board		R1214	06E36591S01	RES,CF. 18K-1/16W
SUB-P.W.Board		R1215	06E36591S01	RES,CF. 18K-1/16W
SUB-P.W.Board		R1216	06E36591S01	RES,CF. 18K-1/16W
SUB-P.W.Board		R1451	06E36623S01	RES,CF. 1M-1/16W
SUB-P.W.Board		R1452	06E40318S01	RES,CF. 5.6K-1/10W
SUB-P.W.Board		R1453	06E40318S01	RES,CF. 5.6K-1/10W

SUB-P.W.Board		R1454	06E40553S01	RES,CF. 2.4K-1/16
SUB-P.W.Board		R1455	06E40553S01	RES,CF. 2.4K-1/16
SUB-P.W.Board		R1456	06E36623S01	RES,CF. 1M-1/16W
SUB-P.W.Board		R1551	06E40826S01	RES,CF. 33K-1/10W
SUB-P.W.Board		R1552	06E40826S01	RES,CF. 33K-1/10W
SUB-P.W.Board		R1553	06E40826S01	RES,CF. 33K-1/10W
SUB-P.W.Board		R1554	06E40826S01	RES,CF. 33K-1/10W
SUB-P.W.Board		R1555	06E36592S01	RES,CF. 22K-1/16W
SUB-P.W.Board		R1556	06E36592S01	RES,CF. 22K-1/16W
SUB-P.W.Board		R1557	06E36592S01	RES,CF. 22K-1/16W
SUB-P.W.Board		R1558	06E36592S01	RES,CF. 22K-1/16W
SUB-P.W.Board		R1559	06E36464S01	RES,CF. 0-1/16W
SUB-P.W.Board		R1560	06E36464S01	RES,CF. 0-1/16W
SUB-P.W.Board		R1561	06E40230S01	RES,CF. 1.8K-1/10W
SUB-P.W.Board		R1562	06E36592S01	RES,CF. 22K-1/16W
SUB-P.W.Board		R1563	06E36592S01	RES,CF. 22K-1/16W
SUB-P.W.Board		R1564	06E40230S01	RES,CF. 1.8K-1/10W
SUB-P.W.Board		R1565	06E36592S01	RES,CF. 22K-1/16W
SUB-P.W.Board		R1566	06E36592S01	RES,CF. 22K-1/16W
SUB-P.W.Board		R1567	06E40230S01	RES,CF. 1.8K-1/10W
SUB-P.W.Board		R1568	06E40230S01	RES,CF. 1.8K-1/10W
SUB-P.W.Board		R1569	06E36464S01	RES,CF. 0-1/16W
SUB-P.W.Board		R1570	06E36464S01	RES,CF. 0-1/16W
SUB-P.W.Board		R1571	06E36623S01	RES,CF. 1M-1/16W
SUB-P.W.Board		R1572	06E36623S01	RES,CF. 1M-1/16W
SUB-P.W.Board		SW1551	40E40956S01	SW,SLIDE SK-23D55-G6
SUB-P.W.Board		VOL1451	18E41507S01	VOL,ROTARY 50KX2
SUB-P.W.Board		VOL1551	18E41440S01	VOL,ROTARY 20KX4
LED-P.W.Board		C8101	08E37118S01	CAP,CER. 220pF/50V
LED-P.W.Board		C8102	08E37118S01	CAP,CER. 220pF/50V
LED-P.W.Board		C8103	08E37118S01	CAP,CER. 220pF/50V
LED-P.W.Board		C8104	08E37118S01	CAP,CER. 220pF/50V
LED-P.W.Board		LD8101	48E41405S01	LED,SML512BC5T BLUE
LED-P.W.Board		LD8102	48E41405S01	LED,SML512BC5T BLUE
LED-P.W.Board		LD8103	48E41405S01	LED,SML512BC5T BLUE
LED-P.W.Board		LD8104	48E41405S01	LED,SML512BC5T BLUE
LED-P.W.Board		R8102	06E38034S01	RES,CF. 1K-1/4W
LED-P.W.Board		R8104	06E38034S01	RES,CF. 1K-1/4W
Miscellaneous		CH8001	01E41447S01	CONN,ASSY 2P

Mark Model Code

#1 PDX-F4(North American) Only,

\$1 PDX-F4(European) Only,

%1 PDX-F4(General Foreign) Only,

&1 PDX-F4(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

#####

	1	-----	HEAT,SINK MAIN
	2	13E41511S01	PANEL,SIDE-R
	3	13E41459S01	PANEL,SIDE-L
	4	-----	CHAS,REAR
	5	-----	COVER,REAR
	6	03E36210S01	SCR,M3X10(P)(WHT)
	7	03E38094S01	SCR,M3X15.5(WS)
	8	-----	CHAS,FRONT
	9	14E41450S01	INSULATOR,SILPAD-2H
	10	14E39754S01	INSULATOR,GAPPAD-COIL
	11	-----	HEAT,SINK BAR
	12	-----	COVER,BOTTOM
	13	30E40380S01	CABLE,FLAT 14P
	14	-----	COVER,STACKING
	15	03E38671S01	SCR,M3X6(B)
	16	03E41471S01	SCR,M2.6X8(P)(BLK)
	17	-----	SUPPORT,PWB
	18	03E39165S01	SCR,M3X11(WP)(WHT)
	20	15E41452S01	COVER,DOOR
	21	03E39505S01	SCR,M3X10(F)(BLK)
	22	34E41467S01	IND,COVER DOOR
	23	09E41464S01	HOLDER,IND
	24	03E39164S01	SCR,M2X6(P)(BLK)
	25	03E38698S01	SCR,M3X8(P)(BLK)
	26	09E41463S01	HOLDER,LED-TOP
	27	61E41457S01	LENS,LED
	28	33E41456S01	PLATE,LENS
	29	33E41454S01	PLATE,SCALE-TOP
	33	75E41465S01	CUSHION,CR SPONGE
	34	75E41466S01	CUSHION,CR SPONGE
	35	33E41455S01	PLATE,COVER DOOR
	36	34E41473S01	IND,PLATE COVER DOOR
%1	37	07E41514S01	BKT,SHIELD-M
&1	37	07E41514S01	BKT,SHIELD-M
	CB4201	09E41510S01	CONN,SPK-CON
	CB4251	09E41510S01	CONN,SPK-CON
	F001	65E38096S01	FUSE,AUTO 30A
	F002	65E38096S01	FUSE,AUTO 30A
	HL9001	09E39445S01	HOLDER,FUSE
	JK1001	09E41442S01	CONN,RCA 4P
	SW1501	40E40956S01	SW,SLIDE SK-23D55-G6
	SW1551	40E40956S01	SW,SLIDE SK-23D55-G6
	TML9001	09E41509S01	CONN,P-CON
	VOL1401	18E41507S01	VOL,ROTARY 50KX2
	VOL1451	18E41507S01	VOL,ROTARY 50KX2
	VOL1501	18E41440S01	VOL,ROTARY 20KX4
	VOL1551	18E41440S01	VOL,ROTARY 20KX4

Mark Model Code

#1 PDX-F4(North American) Only,

\$1 PDX-F4(European) Only,

%1 PDX-F4(General Foreign) Only,

&1 PDX-F4(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

#####